

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640497

Luminaire Tested: ML5609LSWFL55D2W1E - 593WB - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640497
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-51)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5609LSWFL55D2W1E - 593WB - 900LM - 2700K
Description: ML56 RR, 55D TIR OPTIC, 5" WHITE BAFFLE TRIM
Light Source: (1) D2W SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1125.6 lumens
Efficiency: N/A
Efficacy: 95.4 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 11.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640497

CATALOG NUMBER: ML5609LSWFL55D2W1E - 593WB - 900LM - 2700K

Luminous Intensity Polar Plot

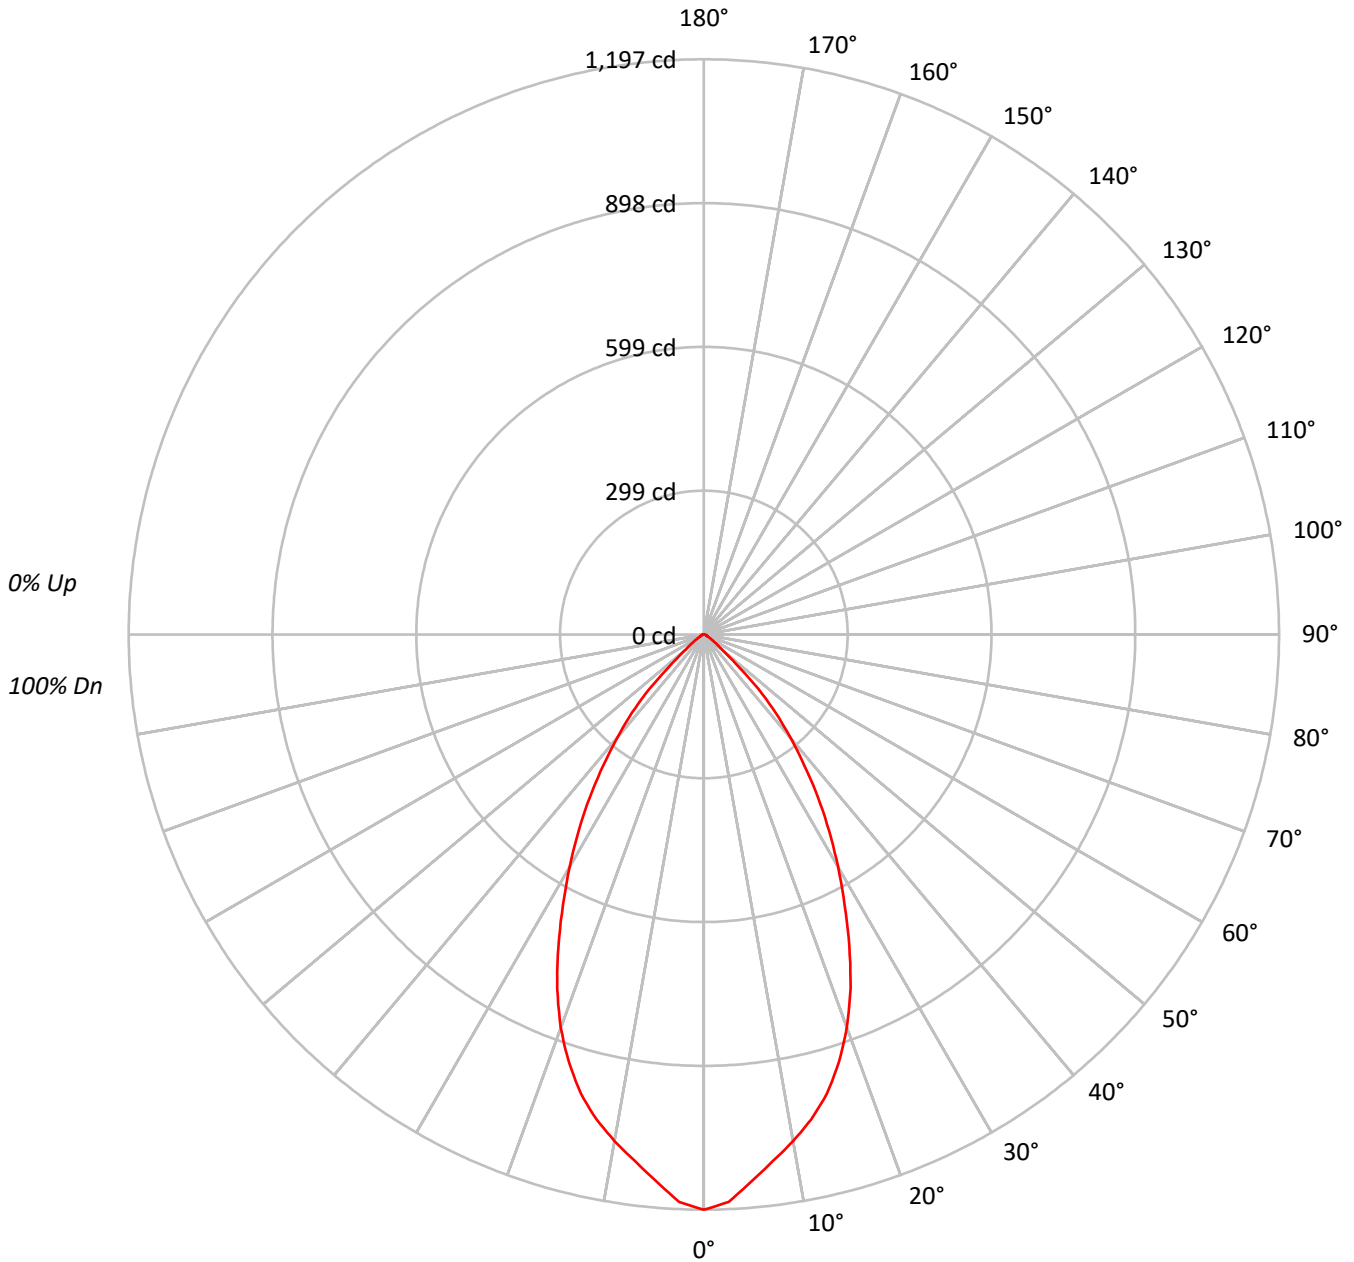



TEST NUMBER: P640497

CATALOG NUMBER: ML5609LSWFL55D2W1E - 593WB - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	86	83	80	79			79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	72			72
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67			67
6	85	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62			62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58			58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54			54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50			50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47			47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	94492
5°	90471
10°	85802
15°	80835
20°	73137
25°	62365
30°	50891
35°	39868
40°	28875
45°	17940
50°	6411
55°	3454
60°	1737
65°	1308
70°	1385
75°	1220
80°	1364
85°	1811

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17940 cd/sqm



TEST NUMBER: P640497

CATALOG NUMBER: ML5609LSWFL55D2W1E - 593WB - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.8	9.5
10°-20°	275.4	24.5
20°-30°	326.9	29.0
30°-40°	257.5	22.9
40°-50°	121.0	10.7
50°-60°	24.3	2.2
60°-70°	7.3	0.6
70°-80°	4.6	0.4
80°-90°	1.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	709.1	63.0
0°-40°	966.6	85.9
0°-60°	1111.9	98.8
0°-90°	1125.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1125.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1197	
5°	1142	107
15°	989	275
25°	716	327
35°	414	257
45°	161	121
55°	25	24
65°	7	7
75°	4	5
85°	2	2
90°	0	



TEST NUMBER: P640497

CATALOG NUMBER: ML5609LSWFL55D2W1E - 593WB - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1197.0
2.5°	1181.9
5°	1141.7
7.5°	1104.6
10°	1070.4
12.5°	1033.3
15°	989.1
17.5°	933.9
20°	870.6
22.5°	797.3
25°	716.0
27.5°	634.6
30°	558.3
32.5°	485.0
35°	413.7
37.5°	343.4
40°	280.2
42.5°	221.9
45°	160.7
47.5°	89.4
50°	52.2
52.5°	36.1
55°	25.1
57.5°	17.1
60°	11.0
62.5°	8.0
65°	7.0
67.5°	6.0
70°	6.0
72.5°	5.0
75°	4.0
77.5°	4.0
80°	3.0
82.5°	2.0
85°	2.0
87.5°	1.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)