

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640558

Luminaire Tested: ML5612LSFL4097FS1E - 592H - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640558
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-26)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSFL4097FS1E - 592H - 1200LM - 3500K
Description: ML56 RR, 40D TIR OPTIC, 5" HAZE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1585.3 lumens
Efficiency: N/A
Efficacy: 96.1 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640558

CATALOG NUMBER: ML5612LSFL4097FS1E - 592H - 1200LM - 3500K

Luminous Intensity Polar Plot

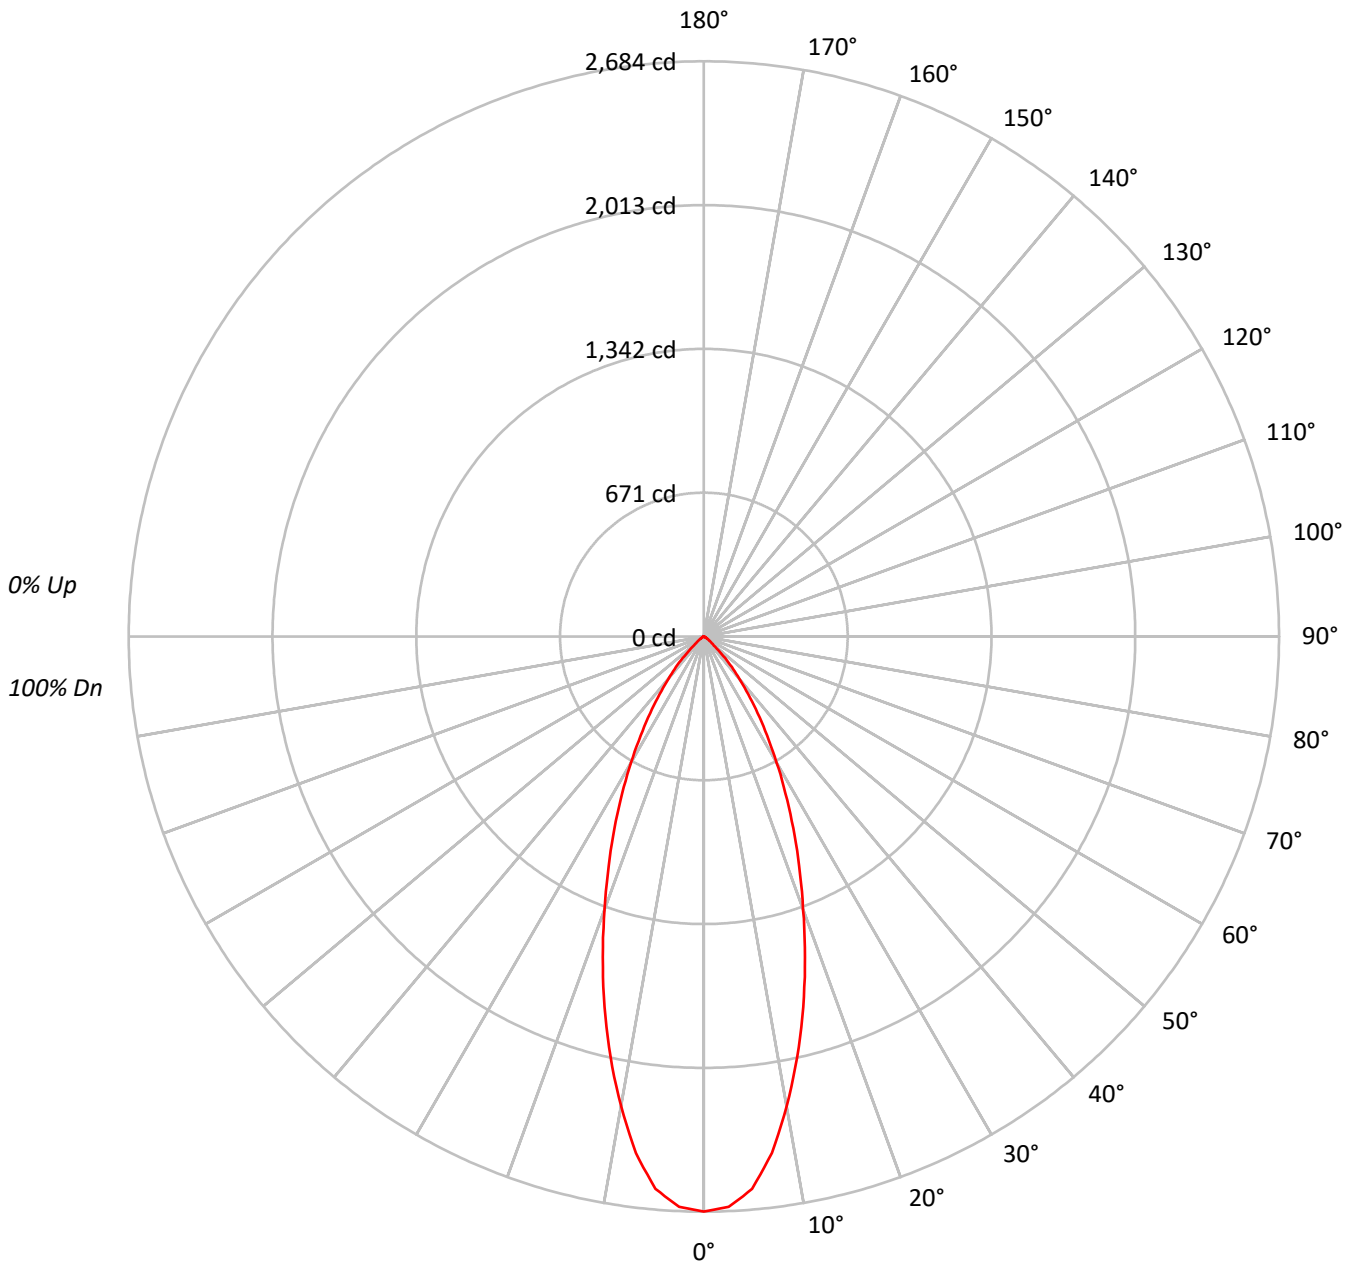



TEST NUMBER: P640558

CATALOG NUMBER: ML5612LSFL4097FS1E - 592H - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94				
2	108	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88				
3	103	97	92	89	101	96	91	88	93	90	87	91	88	85	89	86	84	82				
4	98	91	86	82	97	90	85	81	88	84	80	86	82	80	84	81	79	77				
5	94	86	80	76	92	85	80	76	83	79	75	82	78	75	80	77	74	72				
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	70	68				
7	85	77	71	67	84	76	70	67	75	70	66	73	69	66	72	69	66	64				
8	82	72	67	63	80	72	67	63	71	66	63	70	65	62	69	65	62	61				
9	78	69	63	59	77	68	63	59	67	63	59	67	62	59	66	62	59	57				
10	75	65	60	56	74	65	60	56	64	59	56	63	59	56	63	59	56	55				

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	211838
5°	205016
10°	178417
15°	146322
20°	113712
25°	85935
30°	61820
35°	42094
40°	26175
45°	14334
50°	5318
55°	3069
60°	1768
65°	523
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14334 cd/sqm



TEST NUMBER: P640558

CATALOG NUMBER: ML5612LSFL4097FS1E - 592H - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	235.0	14.8
10°-20°	494.7	31.2
20°-30°	452.2	28.5
30°-40°	276.0	17.4
40°-50°	102.1	6.4
50°-60°	21.5	1.4
60°-70°	3.7	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1182.0	74.6
0°-40°	1458.0	92.0
0°-60°	1581.5	99.8
0°-90°	1585.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1585.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2684	
5°	2587	235
15°	1790	495
25°	987	452
35°	437	276
45°	128	102
55°	22	21
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P640558

CATALOG NUMBER: ML5612LSFL4097FS1E - 592H - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2683.5
2.5°	2664.0
5°	2587.2
7.5°	2430.9
10°	2225.8
12.5°	2010.9
15°	1790.4
17.5°	1568.5
20°	1353.6
22.5°	1159.6
25°	986.6
27.5°	824.7
30°	678.2
32.5°	548.4
35°	436.8
37.5°	339.1
40°	254.0
42.5°	192.6
45°	128.4
47.5°	69.8
50°	43.3
52.5°	32.1
55°	22.3
57.5°	15.4
60°	11.2
62.5°	7.0
65°	2.8
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)