

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640571

Luminaire Tested: ML5612LSFL4097FS1E - 592SC - 1200LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640571
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-25)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSFL4097FS1E - 592SC - 1200LM - 2700K
Description: ML56 RR, 40D TIR OPTIC, 5" SPECULAR CLEAR TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1506.9 lumens
Efficiency: N/A
Efficacy: 91.3 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640571

CATALOG NUMBER: ML5612LSFL4097FS1E - 592SC - 1200LM - 2700K

Luminous Intensity Polar Plot

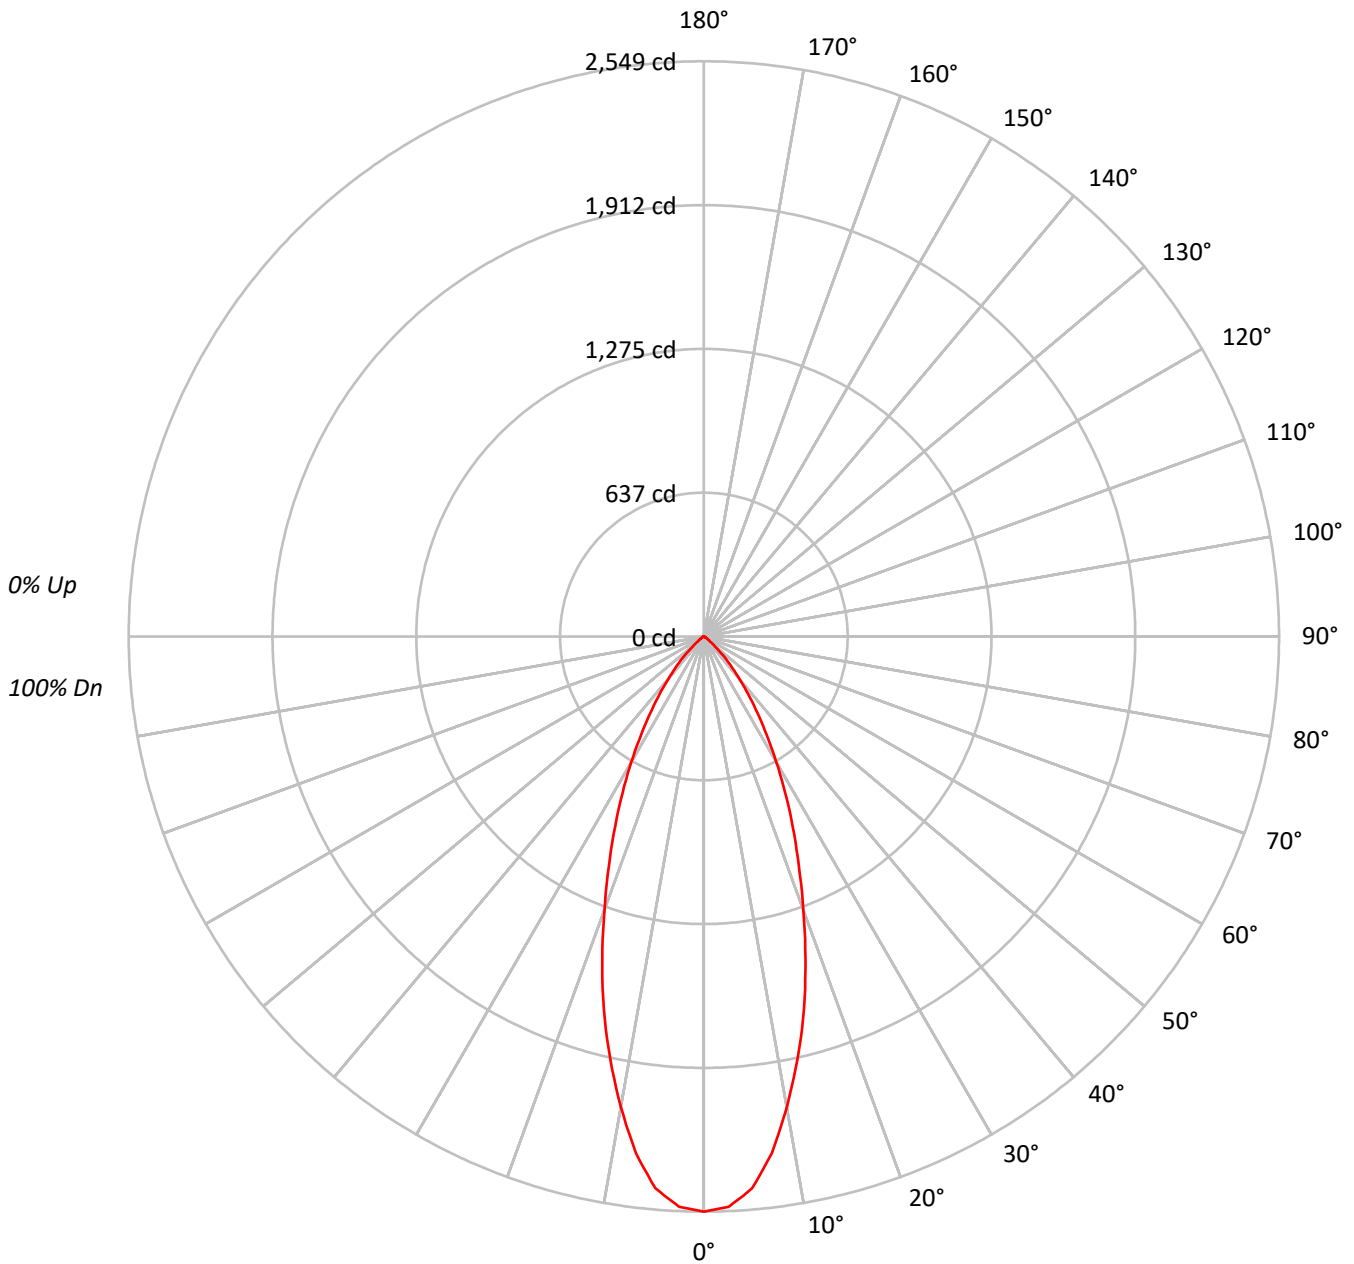



TEST NUMBER: P640571

CATALOG NUMBER: ML5612LSFL4097FS1E - 592SC - 1200LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94																			
2	108	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88																			
3	103	97	92	89	101	96	91	88	93	90	87	91	88	85	89	86	84	82																			
4	98	91	86	82	97	90	85	81	88	84	80	86	82	80	84	81	79	77																			
5	94	86	80	76	92	85	80	76	83	79	75	81	78	75	80	77	74	72																			
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	70	68																			
7	85	77	71	67	84	76	70	67	75	70	66	73	69	66	72	69	66	64																			
8	82	72	67	63	80	72	67	63	71	66	63	70	65	62	69	65	62	61																			
9	78	69	63	59	77	68	63	59	67	63	59	67	62	59	66	62	59	57																			
10	75	65	60	56	74	65	60	56	64	59	56	63	59	56	63	59	56	55																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	201228
5°	194564
10°	169696
15°	139963
20°	108126
25°	81144
30°	58420
35°	39858
40°	24918
45°	14167
50°	5035
55°	2904
60°	1674
65°	486
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14167 cd/sqm



TEST NUMBER: P640571

CATALOG NUMBER: ML5612LSFL4097FS1E - 592SC - 1200LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	223.2	14.8
10°-20°	471.9	31.3
20°-30°	427.9	28.4
30°-40°	261.4	17.3
40°-50°	98.9	6.6
50°-60°	20.0	1.3
60°-70°	3.5	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1123.1	74.5
0°-40°	1384.5	91.9
0°-60°	1503.4	99.8
0°-90°	1506.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1506.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2549	
5°	2455	223
15°	1713	472
25°	932	428
35°	414	261
45°	127	99
55°	21	20
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P640571

CATALOG NUMBER: ML5612LSFL4097FS1E - 592SC - 1200LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2549.1
2.5°	2529.3
5°	2455.3
7.5°	2308.6
10°	2117.0
12.5°	1917.5
15°	1712.6
17.5°	1497.2
20°	1287.1
22.5°	1098.1
25°	931.6
27.5°	779.7
30°	640.9
32.5°	518.0
35°	413.6
37.5°	322.4
40°	241.8
42.5°	182.4
45°	126.9
47.5°	71.4
50°	41.0
52.5°	29.1
55°	21.1
57.5°	14.5
60°	10.6
62.5°	6.6
65°	2.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)