

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640578

Luminaire Tested: ML5612LSFL4097FS1E - 592SC - 600LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640578
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-25)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSFL4097FS1E - 592SC - 600LM - 3500K
Description: ML56 RR, 40D TIR OPTIC, 5" SPECULAR CLEAR TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1025.2 lumens
Efficiency: N/A
Efficacy: 99.5 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640578
CATALOG NUMBER: ML5612LSFL4097FS1E - 592SC - 600LM - 3500K

Luminous Intensity Polar Plot

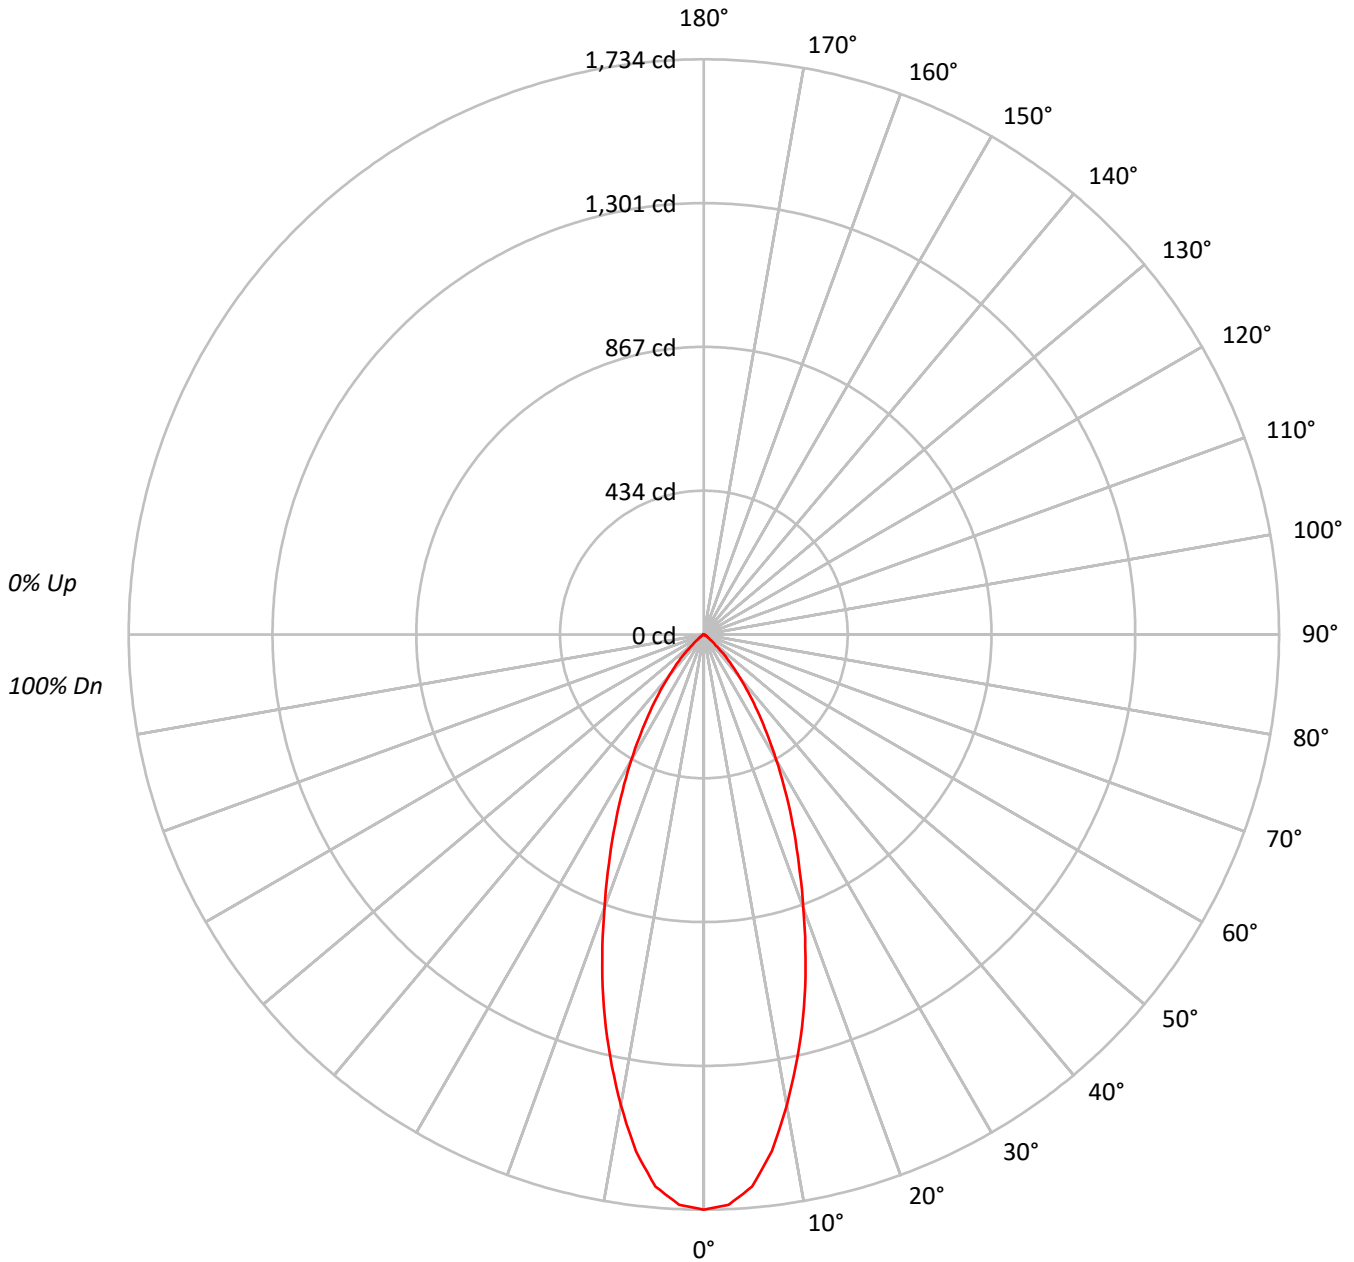



TEST NUMBER: P640578

CATALOG NUMBER: ML5612LSFL4097FS1E - 592SC - 600LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94					94			
2	108	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88					88			
3	103	97	92	89	101	96	91	88	93	90	87	91	88	85	89	86	84	82					82			
4	98	91	86	82	97	90	85	81	88	84	80	86	82	80	84	81	79	77					77			
5	94	86	80	76	92	85	80	76	83	79	75	81	78	75	80	77	74	72					72			
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	70	68					68			
7	85	77	71	67	84	76	70	67	75	70	66	73	69	66	72	69	66	64					64			
8	82	72	67	63	80	72	67	63	71	66	63	70	65	62	69	65	62	61					61			
9	78	69	63	59	77	68	63	59	67	63	59	67	62	59	66	62	59	57					57			
10	75	65	60	56	74	65	60	56	64	59	56	63	59	56	63	59	56	55					55			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	136899
5°	132359
10°	115445
15°	95219
20°	73557
25°	55205
30°	39743
35°	27118
40°	16952
45°	9634
50°	3426
55°	1982
60°	1137
65°	336
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 9634 cd/sqm



TEST NUMBER: P640578

CATALOG NUMBER: ML5612LSFL4097FS1E - 592SC - 600LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.9	14.8
10°-20°	321.1	31.3
20°-30°	291.1	28.4
30°-40°	177.9	17.3
40°-50°	67.2	6.6
50°-60°	13.7	1.3
60°-70°	2.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	764.1	74.5
0°-40°	941.9	91.9
0°-60°	1022.8	99.8
0°-90°	1025.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1025.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1734	
5°	1670	152
15°	1165	321
25°	634	291
35°	281	178
45°	86	67
55°	14	14
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P640578

CATALOG NUMBER: ML5612LSFL4097FS1E - 592SC - 600LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1734.2
2.5°	1720.7
5°	1670.3
7.5°	1570.5
10°	1440.2
12.5°	1304.4
15°	1165.1
17.5°	1018.6
20°	875.6
22.5°	747.1
25°	633.8
27.5°	530.4
30°	436.0
32.5°	352.4
35°	281.4
37.5°	219.4
40°	164.5
42.5°	124.1
45°	86.3
47.5°	48.5
50°	27.9
52.5°	19.8
55°	14.4
57.5°	9.9
60°	7.2
62.5°	4.5
65°	1.8
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)