

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640639

Luminaire Tested: ML5612LSFL4097FS1E - 593TBZB - 600LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640639
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-31)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSFL4097FS1E - 593TBZB - 600LM - 4000K
Description: ML56 RR, 40D TIR OPTIC, 5" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1074.0 lumens
Efficiency: N/A
Efficacy: 104.3 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640639
CATALOG NUMBER: ML5612LSFL4097FS1E - 593TBZB - 600LM - 4000K

Luminous Intensity Polar Plot

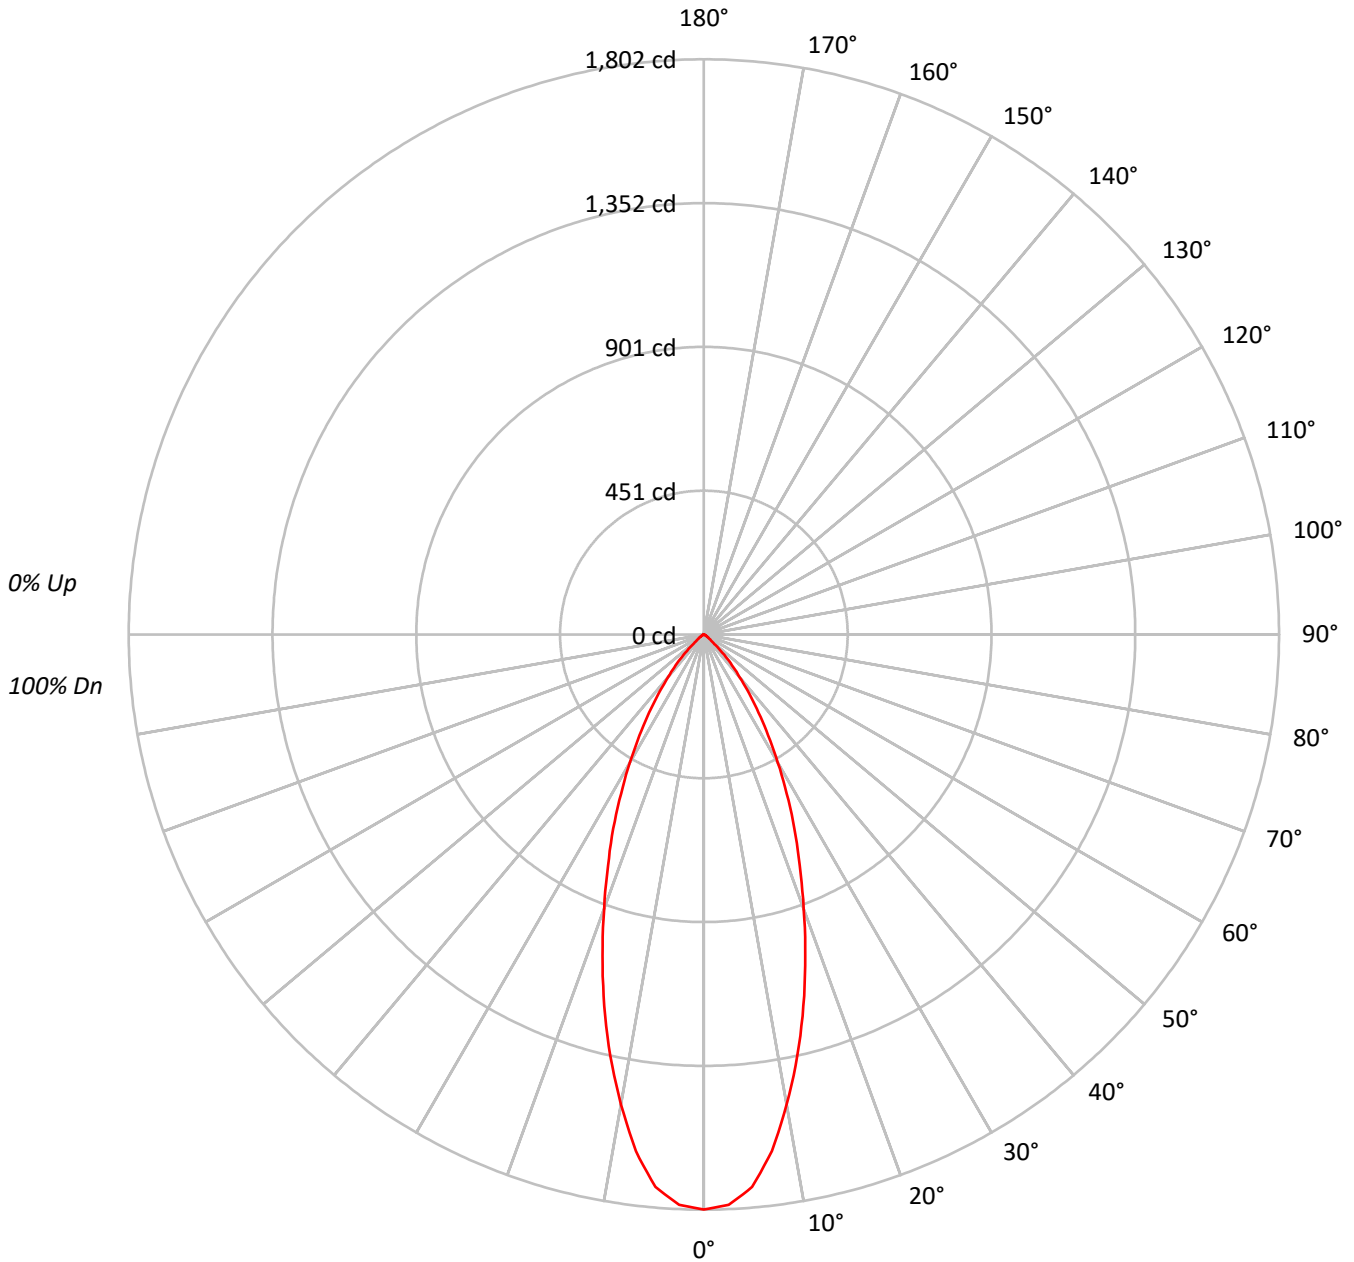



TEST NUMBER: P640639

CATALOG NUMBER: ML5612LSFL4097FS1E - 593TBZB - 600LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94		
2	108	104	100	97	106	102	99	96	99	96	93	96	94	91	93	91	90	88		
3	103	97	92	89	101	96	91	88	93	89	86	91	88	85	89	86	84	82		
4	98	91	86	82	97	90	85	81	88	84	80	86	82	79	84	81	79	77		
5	94	86	80	76	92	85	80	76	83	79	75	81	77	74	80	76	74	72		
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	69	68		
7	85	76	71	67	84	76	70	66	74	70	66	73	69	66	72	68	65	64		
8	81	72	67	63	80	72	66	63	71	66	62	70	65	62	69	65	62	61		
9	78	69	63	59	77	68	63	59	67	62	59	66	62	59	66	62	59	57		
10	75	65	60	56	74	65	60	56	64	59	56	63	59	56	63	59	56	54		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	142212
5°	137700
10°	119829
15°	98471
20°	76766
25°	58454
30°	42222
35°	28795
40°	17838
45°	10036
50°	3684
55°	2133
60°	1216
65°	355
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10036 cd/sqm



TEST NUMBER: P640639

CATALOG NUMBER: ML5612LSFL4097FS1E - 593TBZB - 600LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.8	14.7
10°-20°	333.0	31.0
20°-30°	307.0	28.6
30°-40°	188.9	17.6
40°-50°	70.1	6.5
50°-60°	14.7	1.4
60°-70°	2.6	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	797.8	74.3
0°-40°	986.7	91.9
0°-60°	1071.5	99.8
0°-90°	1074.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1074.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1802	
5°	1738	158
15°	1205	333
25°	671	307
35°	299	189
45°	90	70
55°	16	15
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P640639

CATALOG NUMBER: ML5612LSFL4097FS1E - 593TBZB - 600LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1801.5
2.5°	1788.9
5°	1737.7
7.5°	1632.3
10°	1494.9
12.5°	1352.8
15°	1204.9
17.5°	1055.9
20°	913.8
22.5°	784.2
25°	671.1
27.5°	561.8
30°	463.2
32.5°	375.2
35°	298.8
37.5°	233.0
40°	173.1
42.5°	130.5
45°	89.9
47.5°	48.3
50°	30.0
52.5°	21.3
55°	15.5
57.5°	10.6
60°	7.7
62.5°	4.8
65°	1.9
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)