

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640649

Luminaire Tested: ML5612LSFL4097FS1E - 593WB - 1200LM - 4000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P640649  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSFL4097FS1E - 593WB - 1200LM - 4000K  
Description: ML56 RR, 40D TIR OPTIC, 5" WHITE BAFFLE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1705.6 lumens  
Efficiency: N/A  
Efficacy: 103.4 lumens/watt  
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct

Input Watts (W): 16.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P640649  
CATALOG NUMBER: ML5612LSFL4097FS1E - 593WB - 1200LM - 4000K

### Luminous Intensity Polar Plot

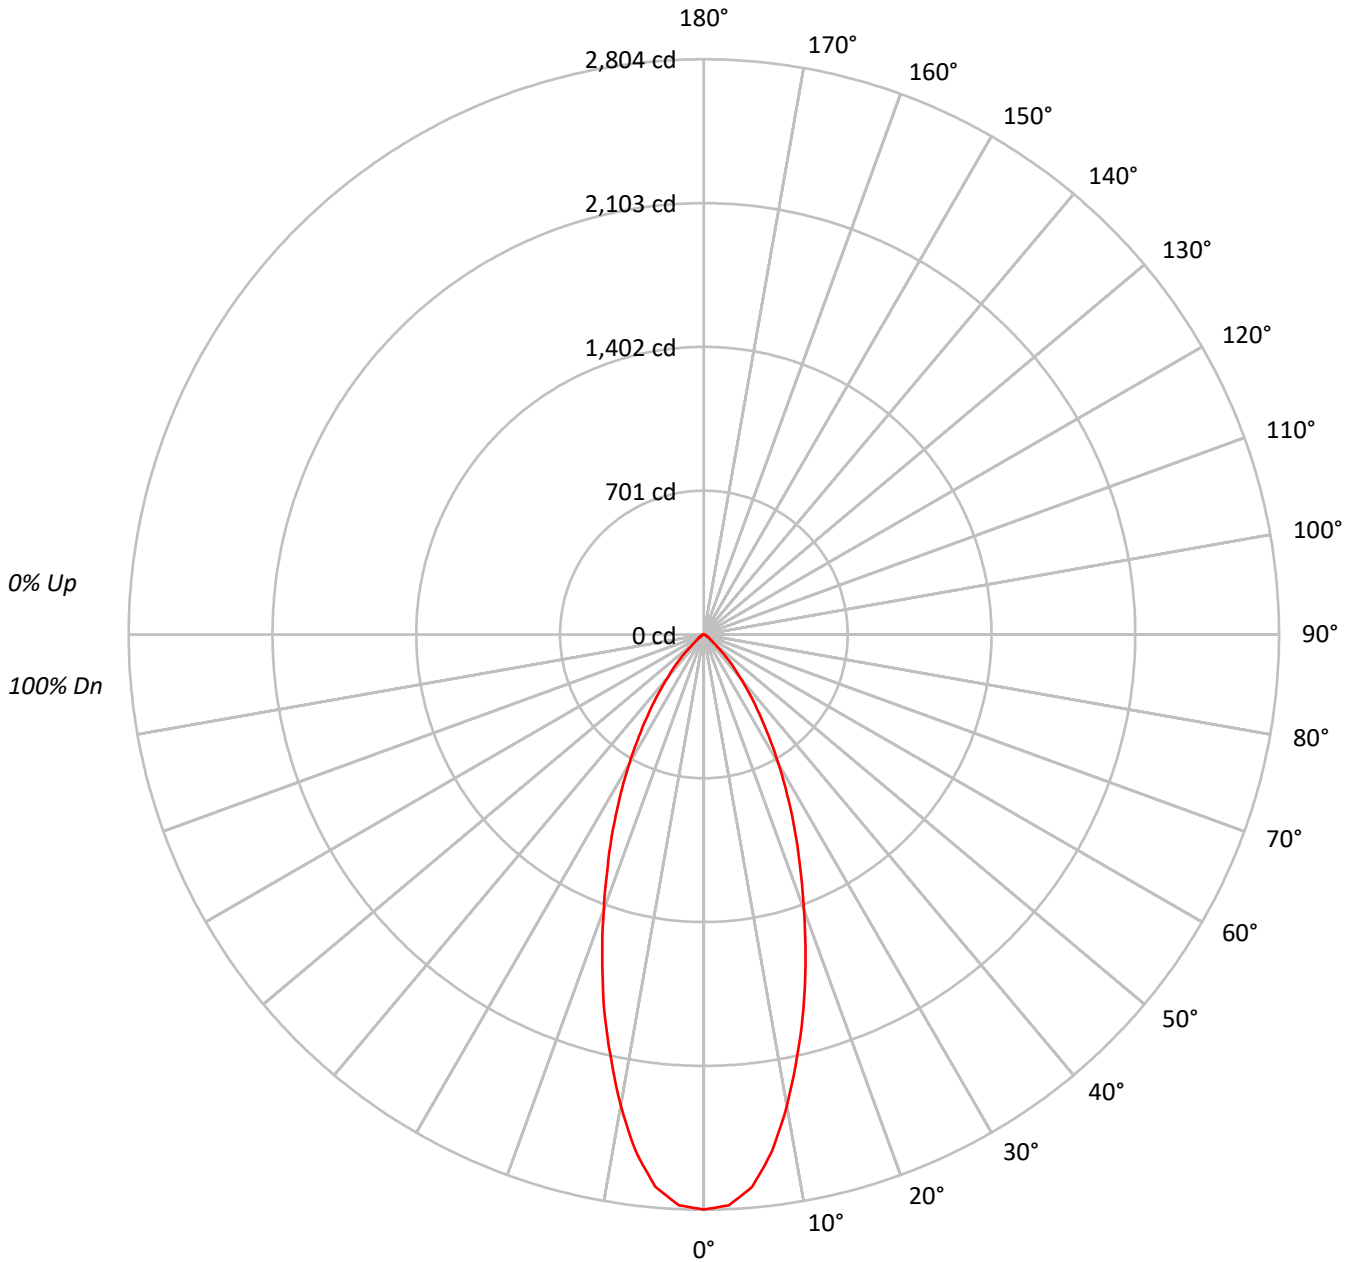



TEST NUMBER: P640649

CATALOG NUMBER: ML5612LSFL4097FS1E - 593WB - 1200LM - 4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94																			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	82	79	83	80	78	76																			
5	93	85	79	75	92	84	79	75	82	78	74	81	77	73	79	76	73	71																			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																			
7	85	76	70	66	83	75	69	66	74	69	65	73	68	65	71	67	64	63																			
8	81	72	66	62	80	71	66	62	70	65	61	69	64	61	68	64	61	60																			
9	77	68	62	58	76	67	62	58	66	62	58	66	61	58	65	61	58	56																			
10	74	65	59	55	73	64	59	55	63	58	55	63	58	55	62	58	55	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	221311
5°	214184
10°	186930
15°	153644
20°	119710
25°	91291
30°	66113
35°	45149
40°	28164
45°	16768
50°	6644
55°	4335
60°	3079
65°	1961
70°	1731
75°	1830
80°	2046
85°	2717

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16768 cd/sqm



TEST NUMBER: P640649

CATALOG NUMBER: ML5612LSFL4097FS1E - 593WB - 1200LM - 4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	245.8	14.4
10°-20°	519.1	30.4
20°-30°	479.7	28.1
30°-40°	296.5	17.4
40°-50°	115.0	6.7
50°-60°	29.5	1.7
60°-70°	11.5	0.7
70°-80°	5.9	0.3
80°-90°	2.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1244.5	73.0
0°-40°	1541.1	90.4
0°-60°	1685.6	98.8
0°-90°	1705.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1705.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2804	
5°	2703	246
15°	1880	519
25°	1048	480
35°	468	297
45°	150	115
55°	32	29
65°	10	11
75°	6	6
85°	3	3
90°	0	



TEST NUMBER: P640649

CATALOG NUMBER: ML5612LSFL4097FS1E - 593WB - 1200LM - 4000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2803.5
2.5°	2785.5
5°	2702.9
7.5°	2542.2
10°	2332.0
12.5°	2103.8
15°	1880.0
17.5°	1647.3
20°	1425.0
22.5°	1225.3
25°	1048.1
27.5°	878.4
30°	725.3
32.5°	587.1
35°	468.5
37.5°	367.9
40°	273.3
42.5°	208.7
45°	150.2
47.5°	84.1
50°	54.1
52.5°	40.5
55°	31.5
57.5°	24.0
60°	19.5
62.5°	15.0
65°	10.5
67.5°	7.5
70°	7.5
72.5°	6.0
75°	6.0
77.5°	4.5
80°	4.5
82.5°	3.0
85°	3.0
87.5°	1.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)