

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640670

Luminaire Tested: ML5612LSFL4097FS1E - 594SNB - 600LM - 5000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P640670  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-33)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSFL4097FS1E - 594SNB - 600LM - 5000K  
Description: ML56 RR, 40D TIR OPTIC, 5" SATIN NICKLE GIMBAL TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1110.2 lumens  
Efficiency: N/A  
Efficacy: 107.8 lumens/watt  
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P640670  
CATALOG NUMBER: ML5612LSFL4097FS1E - 594SNB - 600LM - 5000K

### Luminous Intensity Polar Plot

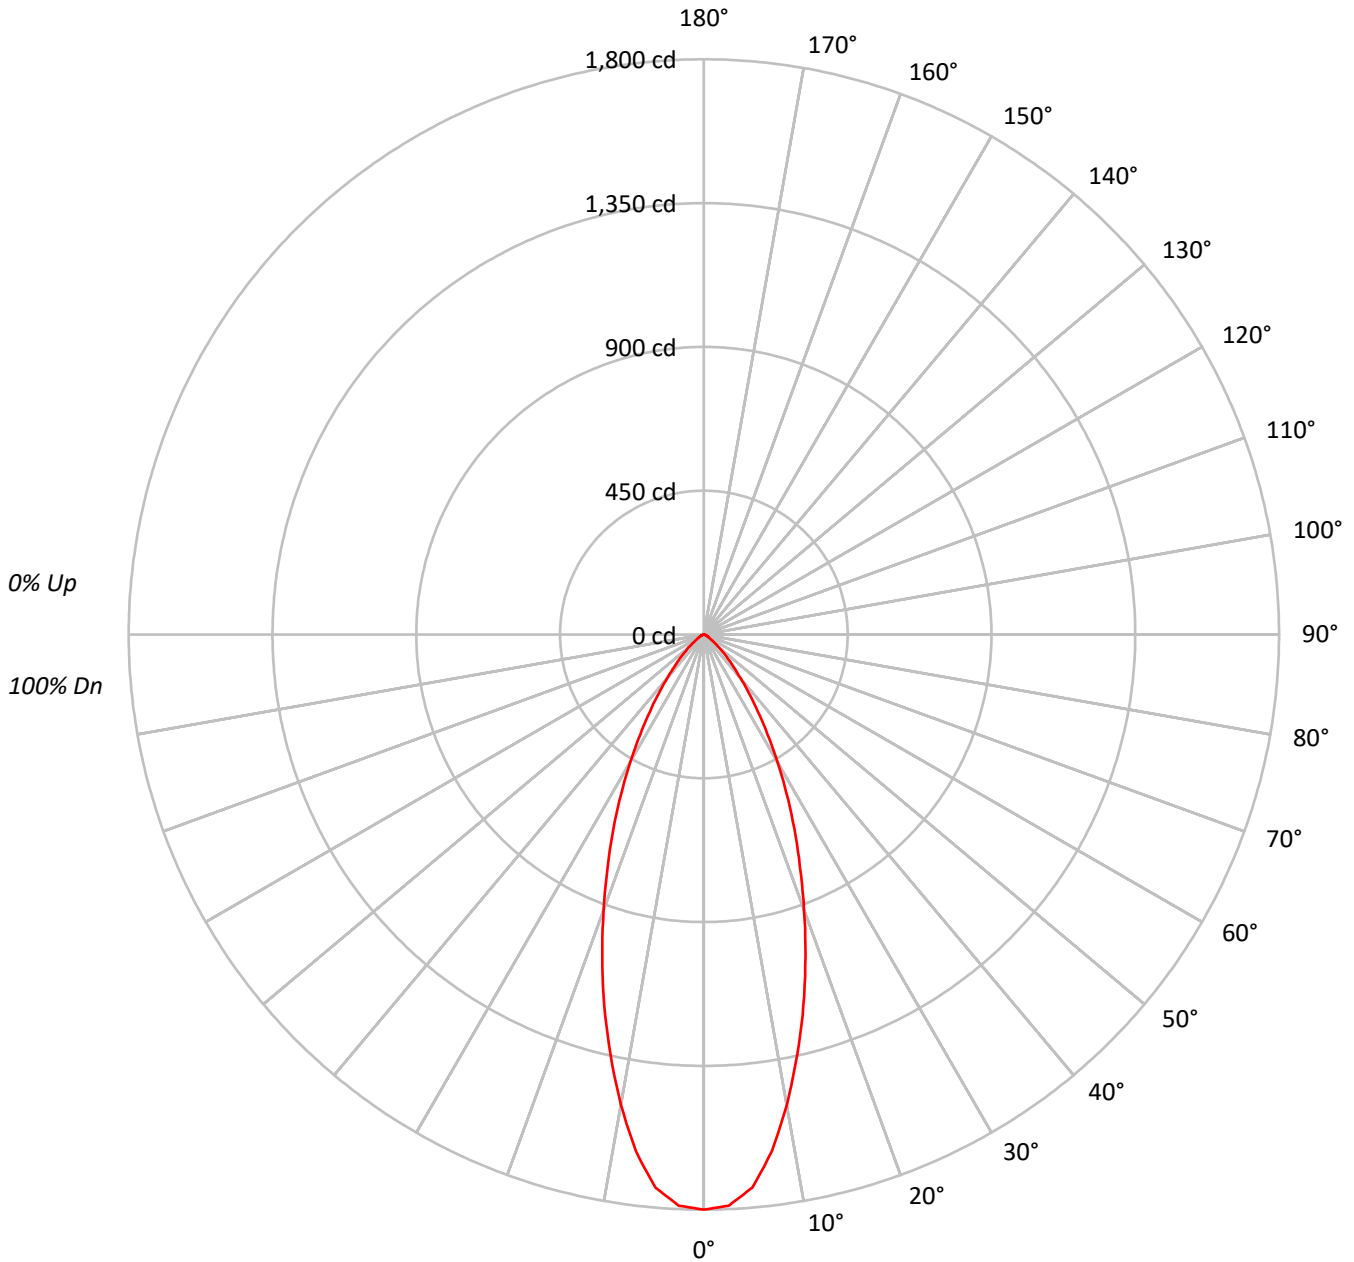



TEST NUMBER: P640670

CATALOG NUMBER: ML5612LSFL4097FS1E - 594SNB - 600LM - 5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93																			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87																			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	87	85	83	81																			
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76																			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	79	75	72	71																			
6	88	79	74	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66																			
7	84	75	69	65	83	74	69	65	73	68	64	72	67	64	71	67	64	62																			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59																			
9	77	67	61	58	76	67	61	57	66	61	57	65	60	57	64	60	57	56																			
10	73	64	58	54	72	63	58	54	63	58	54	62	57	54	61	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	142078
5°	137644
10°	119789
15°	98349
20°	76976
25°	58262
30°	41848
35°	28410
40°	18333
45°	11867
50°	6890
55°	3854
60°	2589
65°	1812
70°	1339
75°	1190
80°	864
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11867 cd/sqm



TEST NUMBER: P640670

CATALOG NUMBER: ML5612LSFL4097FS1E - 594SNB - 600LM - 5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	157.8	14.2
10°-20°	332.8	30.0
20°-30°	306.3	27.6
30°-40°	187.3	16.9
40°-50°	83.7	7.5
50°-60°	27.7	2.5
60°-70°	10.4	0.9
70°-80°	3.8	0.3
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	796.8	71.8
0°-40°	984.1	88.6
0°-60°	1095.5	98.7
0°-90°	1110.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1110.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1800	
5°	1737	158
15°	1203	333
25°	669	306
35°	295	187
45°	106	84
55°	28	28
65°	10	10
75°	4	4
85°	0	1
90°	0	



TEST NUMBER: P640670

CATALOG NUMBER: ML5612LSFL4097FS1E - 594SNB - 600LM - 5000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1799.8
2.5°	1789.2
5°	1737.0
7.5°	1630.7
10°	1494.4
12.5°	1348.4
15°	1203.4
17.5°	1056.5
20°	916.3
22.5°	784.9
25°	668.9
27.5°	558.7
30°	459.1
32.5°	370.2
35°	294.8
37.5°	231.0
40°	177.9
42.5°	137.3
45°	106.3
47.5°	78.3
50°	56.1
52.5°	39.6
55°	28.0
57.5°	21.3
60°	16.4
62.5°	13.5
65°	9.7
67.5°	7.7
70°	5.8
72.5°	4.8
75°	3.9
77.5°	1.9
80°	1.9
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)