

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640673

Luminaire Tested: ML5612LSFL4097FS1E - 594SNB - 900LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640673
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-33)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSFL4097FS1E - 594SNB - 900LM - 3500K
Description: ML56 RR, 40D TIR OPTIC, 5" SATIN NICKLE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1323.3 lumens
Efficiency: N/A
Efficacy: 99.5 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640673

CATALOG NUMBER: ML5612LSFL4097FS1E - 594SNB - 900LM - 3500K

Luminous Intensity Polar Plot

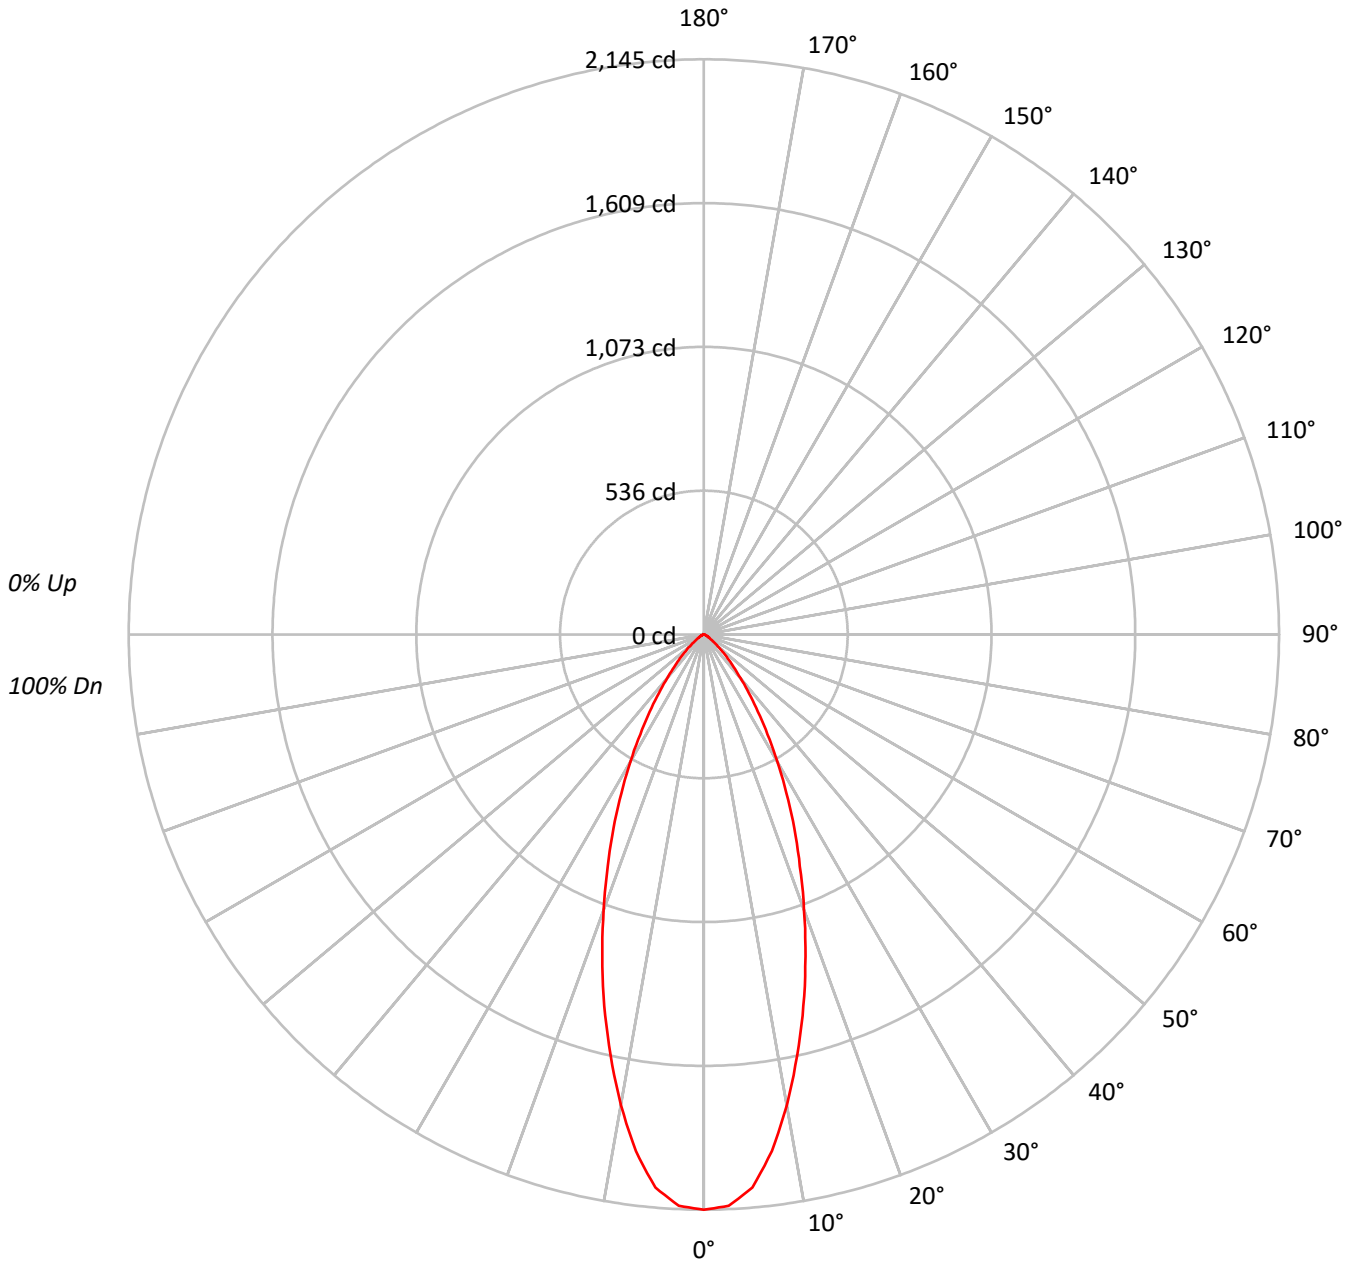



TEST NUMBER: P640673

CATALOG NUMBER: ML5612LSFL4097FS1E - 594SNB - 900LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93																			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87																			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	87	85	83	81																			
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76																			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	79	75	72	71																			
6	88	79	74	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66																			
7	84	75	69	65	83	74	69	65	73	68	64	72	67	64	71	67	64	62																			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59																			
9	77	67	61	58	76	67	61	57	66	61	57	65	60	57	64	60	57	56																			
10	73	64	58	54	72	63	58	54	63	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	169352
5°	164064
10°	142779
15°	117227
20°	91753
25°	69446
30°	49888
35°	33864
40°	21847
45°	14145
50°	8204
55°	4597
60°	3094
65°	2148
70°	1593
75°	1403
80°	1046
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14145 cd/sqm



TEST NUMBER: P640673

CATALOG NUMBER: ML5612LSFL4097FS1E - 594SNB - 900LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	188.0	14.2
10°-20°	396.6	30.0
20°-30°	365.1	27.6
30°-40°	223.3	16.9
40°-50°	99.7	7.5
50°-60°	33.0	2.5
60°-70°	12.3	0.9
70°-80°	4.6	0.3
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	949.7	71.8
0°-40°	1173.0	88.6
0°-60°	1305.8	98.7
0°-90°	1323.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1323.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2145	
5°	2070	188
15°	1434	397
25°	797	365
35°	351	223
45°	127	100
55°	33	33
65°	12	12
75°	5	5
85°	0	1
90°	0	



TEST NUMBER: P640673

CATALOG NUMBER: ML5612LSFL4097FS1E - 594SNB - 900LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2145.3
2.5°	2132.6
5°	2070.4
7.5°	1943.6
10°	1781.2
12.5°	1607.2
15°	1434.4
17.5°	1259.3
20°	1092.2
22.5°	935.5
25°	797.3
27.5°	665.9
30°	547.3
32.5°	441.3
35°	351.4
37.5°	275.4
40°	212.0
42.5°	163.6
45°	126.7
47.5°	93.3
50°	66.8
52.5°	47.2
55°	33.4
57.5°	25.3
60°	19.6
62.5°	16.1
65°	11.5
67.5°	9.2
70°	6.9
72.5°	5.8
75°	4.6
77.5°	2.3
80°	2.3
82.5°	1.2
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)