

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640734

Luminaire Tested: ML5612LSFL4097FS1E - 691WB - 900LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640734
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSFL4097FS1E - 691WB - 900LM - 4000K
Description: ML56 RR, 40D TIR OPTIC, 6" DEADFRONT TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1420.1 lumens
Efficiency: N/A
Efficacy: 106.8 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640734

CATALOG NUMBER: ML5612LSFL4097FS1E - 691WB - 900LM - 4000K

Luminous Intensity Polar Plot

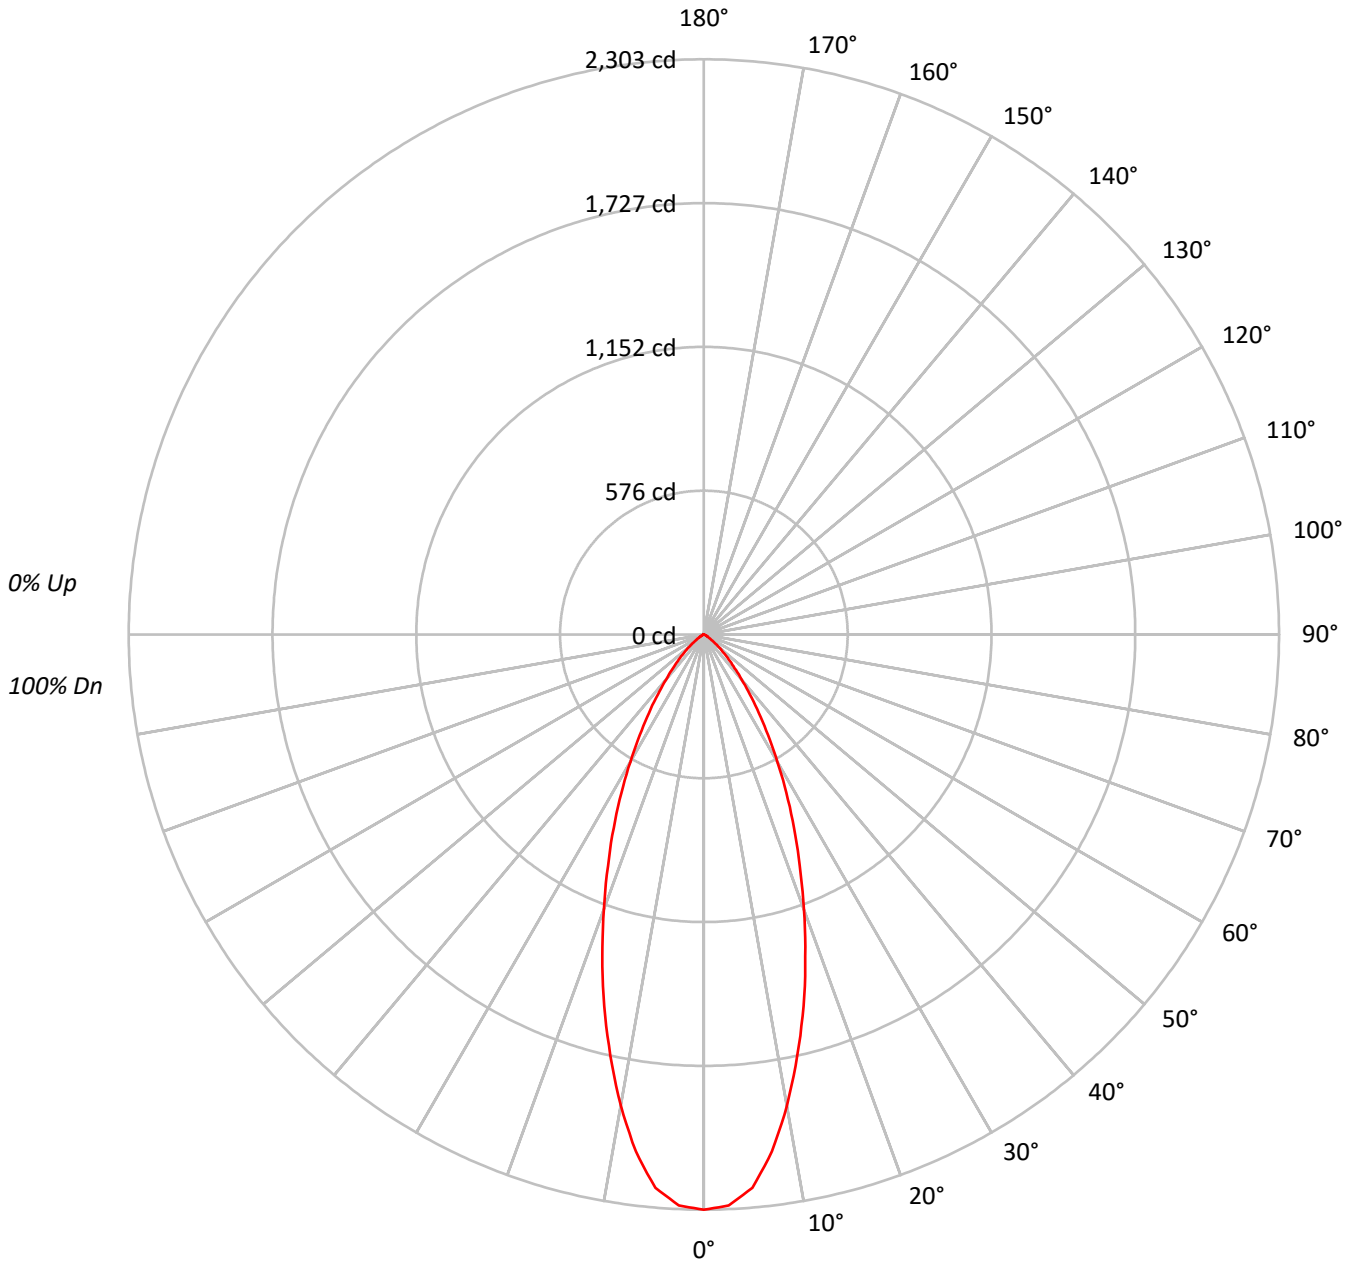



TEST NUMBER: P640734

CATALOG NUMBER: ML5612LSFL4097FS1E - 691WB - 900LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94																			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	91	87	101	95	90	87	92	89	85	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76																			
5	93	85	79	75	91	84	78	74	82	77	74	80	76	73	79	75	72	71																			
6	88	80	74	70	87	79	73	69	77	72	69	76	72	68	75	71	68	67																			
7	84	75	69	65	83	74	69	65	73	68	65	72	68	64	71	67	64	63																			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	61	67	63	60	59																			
9	77	67	62	58	76	67	61	58	66	61	57	65	61	57	64	60	57	56																			
10	73	64	58	55	72	64	58	55	63	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	126267
5°	122380
10°	106611
15°	87452
20°	68268
25°	51662
30°	37272
35°	25632
40°	16767
45°	10955
50°	6448
55°	3431
60°	1908
65°	1129
70°	593
75°	254
80°	379
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10955 cd/sqm



TEST NUMBER: P640734

CATALOG NUMBER: ML5612LSFL4097FS1E - 691WB - 900LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	202.0	14.2
10°-20°	425.9	30.0
20°-30°	391.4	27.6
30°-40°	242.9	17.1
40°-50°	111.1	7.8
50°-60°	35.0	2.5
60°-70°	9.0	0.6
70°-80°	1.9	0.1
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1019.3	71.8
0°-40°	1262.3	88.9
0°-60°	1408.4	99.2
0°-90°	1420.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1420.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2303	
5°	2224	202
15°	1541	426
25°	854	391
35°	383	243
45°	141	111
55°	36	35
65°	9	9
75°	1	2
85°	1	1
90°	0	



TEST NUMBER: P640734

CATALOG NUMBER: ML5612LSFL4097FS1E - 691WB - 900LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2303.3
2.5°	2288.4
5°	2223.9
7.5°	2087.6
10°	1915.2
12.5°	1728.1
15°	1540.9
17.5°	1351.2
20°	1170.2
22.5°	1002.9
25°	854.1
27.5°	714.0
30°	588.8
32.5°	477.3
35°	383.0
37.5°	302.5
40°	234.3
42.5°	182.2
45°	141.3
47.5°	104.1
50°	75.6
52.5°	52.1
55°	35.9
57.5°	23.6
60°	17.4
62.5°	12.4
65°	8.7
67.5°	5.0
70°	3.7
72.5°	2.5
75°	1.2
77.5°	1.2
80°	1.2
82.5°	1.2
85°	1.2
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)