

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640780

Luminaire Tested: ML5612LSFL4097FS1E - 692W - 900LM - 5000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P640780  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-39)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSFL4097FS1E - 692W - 900LM - 5000K  
Description: ML56 RR, 40D TIR OPTIC, 6" WHITE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1420.6 lumens  
Efficiency: N/A  
Efficacy: 106.8 lumens/watt  
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 13.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P640780  
CATALOG NUMBER: ML5612LSFL4097FS1E - 692W - 900LM - 5000K

### Luminous Intensity Polar Plot

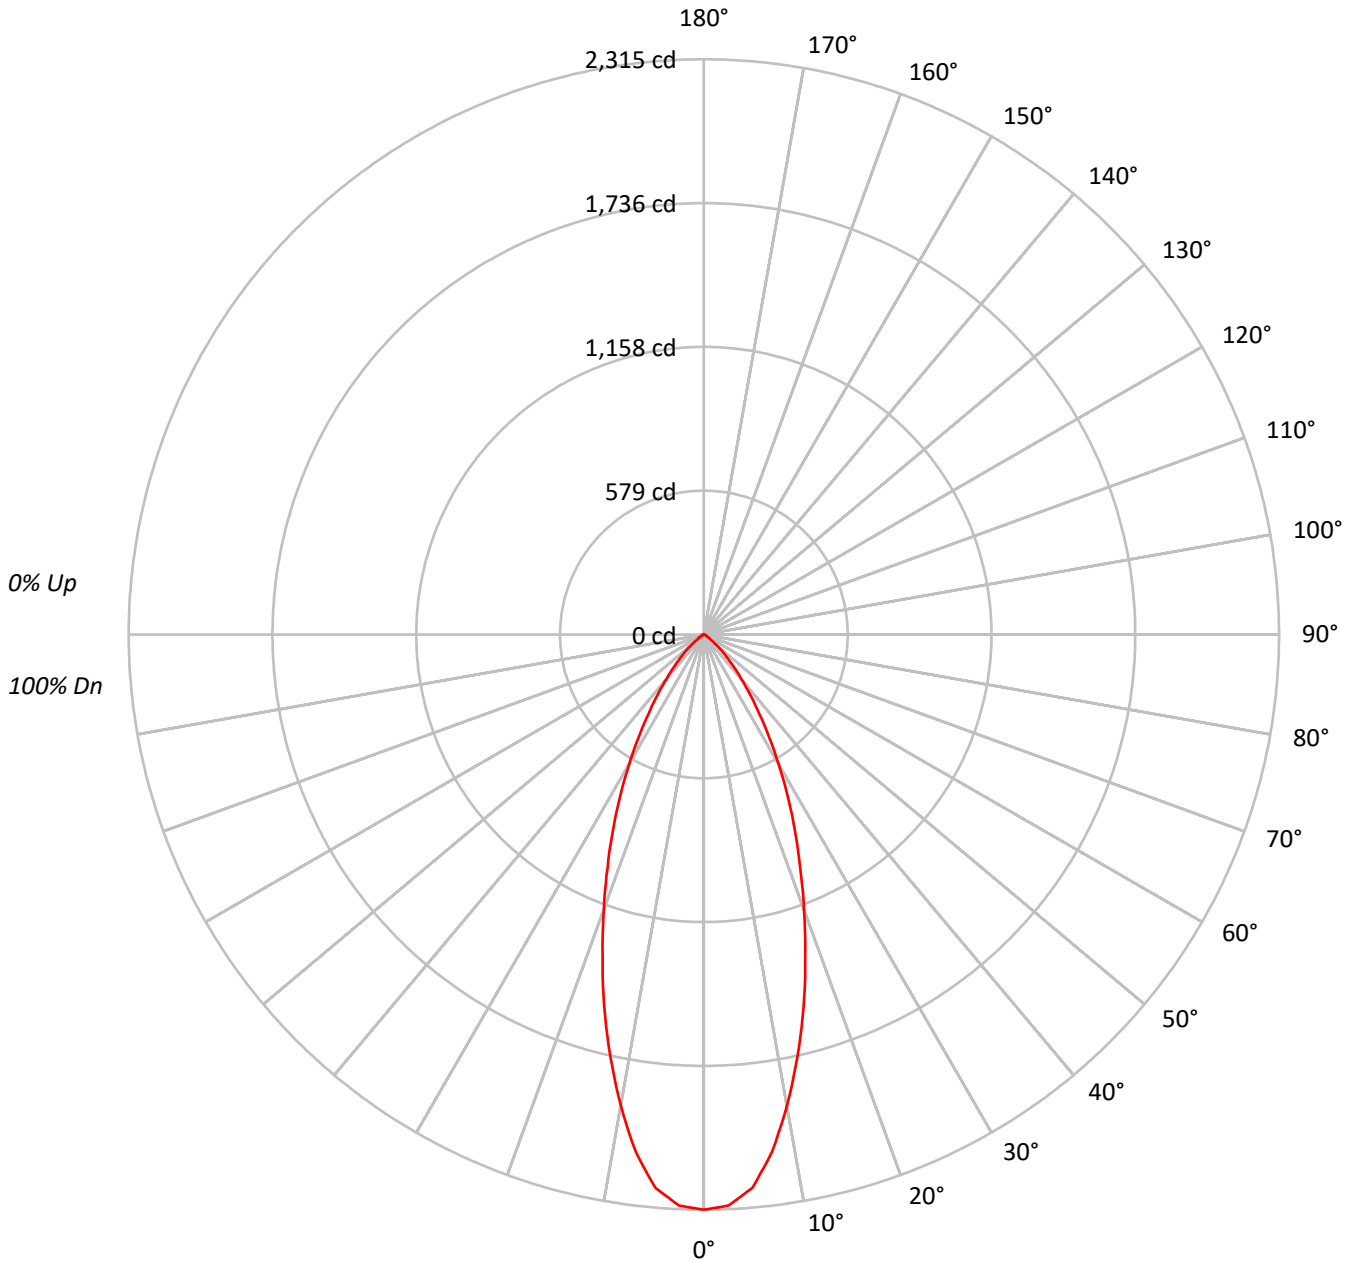



TEST NUMBER: P640780

CATALOG NUMBER: ML5612LSFL4097FS1E - 692W - 900LM - 5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	98	96	95	94			94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87			87
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81			81
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	78	76			76
5	93	85	79	75	91	84	79	75	82	78	74	81	76	73	79	75	73	71			71
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67			67
7	84	75	70	65	83	75	69	65	73	69	65	72	68	65	71	67	64	63			63
8	81	71	66	62	79	71	65	61	70	65	61	69	64	61	68	64	61	59			59
9	77	68	62	58	76	67	62	58	66	61	58	65	61	58	65	60	57	56			56
10	74	64	59	55	73	64	58	55	63	58	55	62	58	55	62	57	54	53			53

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	126909
5°	123030
10°	107196
15°	88037
20°	68723
25°	52279
30°	37911
35°	25973
40°	16860
45°	10482
50°	5501
55°	2485
60°	1634
65°	960
70°	593
75°	530
80°	789
85°	755

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 10482 cd/sqm



TEST NUMBER: P640780

CATALOG NUMBER: ML5612LSFL4097FS1E - 692W - 900LM - 5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	203.1	14.3
10°-20°	428.4	30.2
20°-30°	396.2	27.9
30°-40°	246.3	17.3
40°-50°	108.2	7.6
50°-60°	26.6	1.9
60°-70°	7.8	0.5
70°-80°	3.1	0.2
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1027.7	72.3
0°-40°	1274.0	89.7
0°-60°	1408.8	99.2
0°-90°	1420.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1420.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2315	
5°	2236	203
15°	1551	428
25°	864	396
35°	388	246
45°	135	108
55°	26	27
65°	7	8
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P640780

CATALOG NUMBER: ML5612LSFL4097FS1E - 692W - 900LM - 5000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2315.0
2.5°	2300.2
5°	2235.7
7.5°	2100.5
10°	1925.7
12.5°	1739.7
15°	1551.2
17.5°	1356.5
20°	1178.0
22.5°	1011.8
25°	864.3
27.5°	726.6
30°	598.9
32.5°	486.1
35°	388.1
37.5°	305.0
40°	235.6
42.5°	182.3
45°	135.2
47.5°	100.4
50°	64.5
52.5°	34.7
55°	26.0
57.5°	19.8
60°	14.9
62.5°	11.2
65°	7.4
67.5°	3.7
70°	3.7
72.5°	3.7
75°	2.5
77.5°	2.5
80°	2.5
82.5°	1.2
85°	1.2
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)