

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640795

Luminaire Tested: ML5612LSFL4097FS1E - 693BB - 900LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640795
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-41)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSFL4097FS1E - 693BB - 900LM - 5000K
Description: ML56 RR, 40D TIR OPTIC, 6" BLACK BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1397.1 lumens
Efficiency: N/A
Efficacy: 105.0 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640795

CATALOG NUMBER: ML5612LSFL4097FS1E - 693BB - 900LM - 5000K

Luminous Intensity Polar Plot

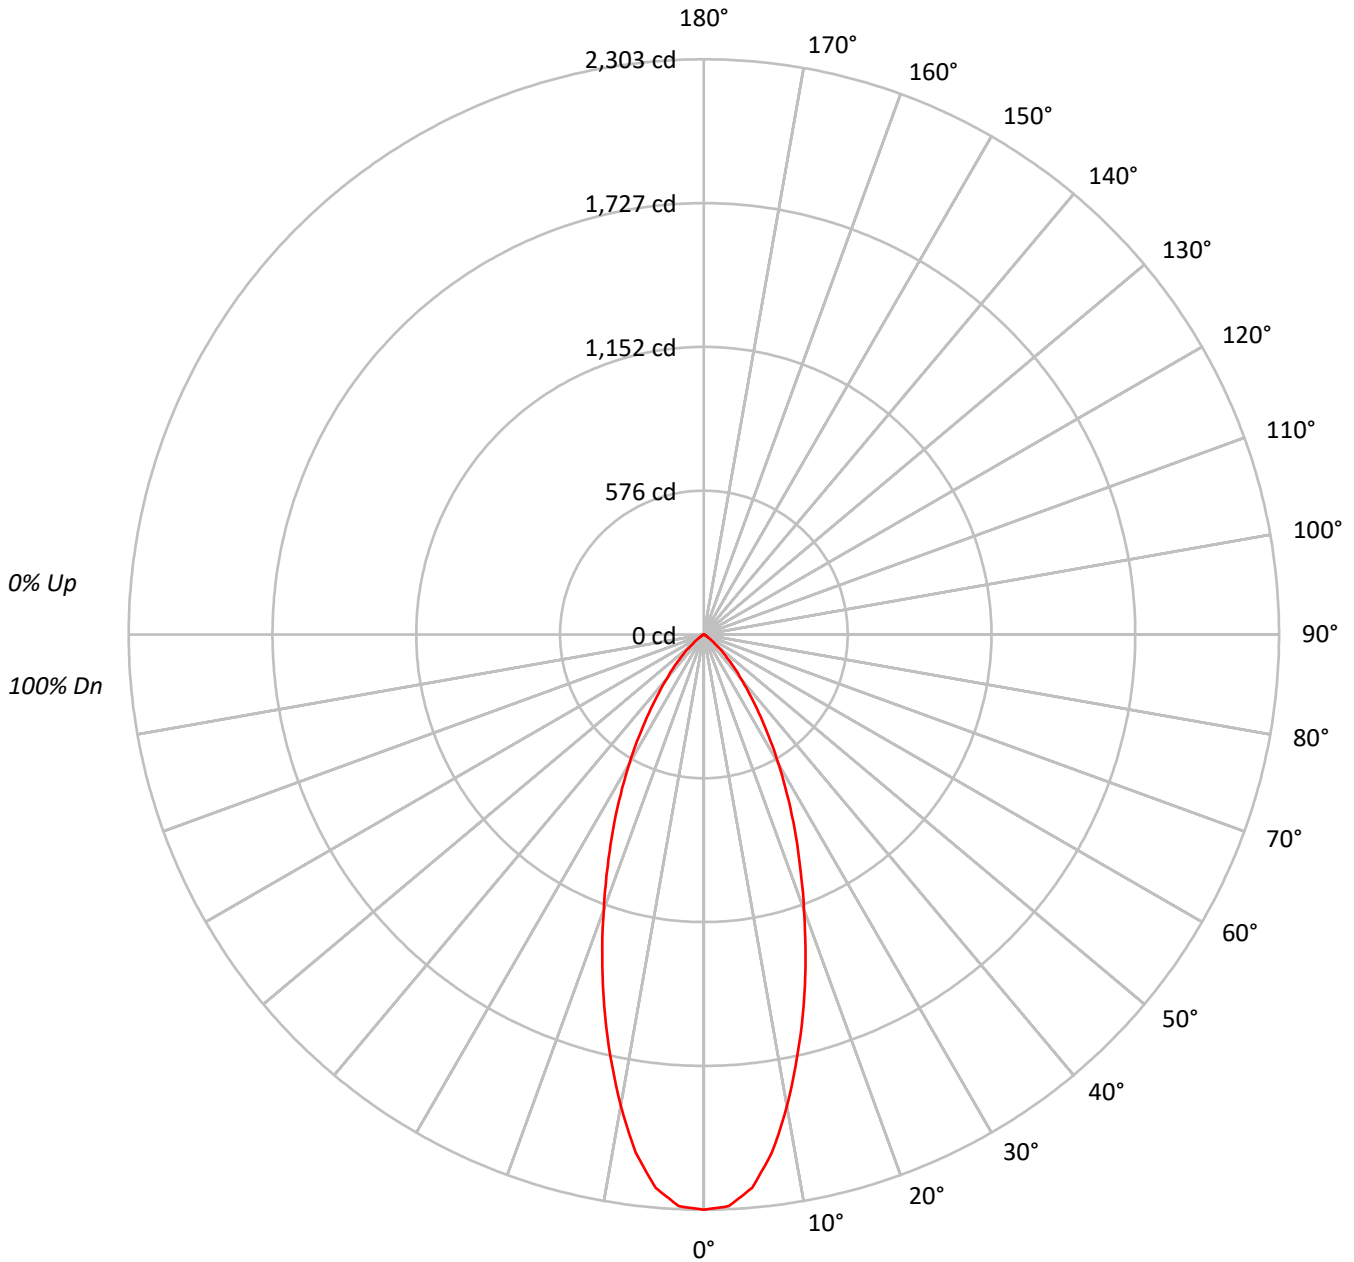



TEST NUMBER: P640795

CATALOG NUMBER: ML5612LSFL4097FS1E - 693BB - 900LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82			
4	98	91	85	81	96	90	85	81	88	83	80	86	82	79	84	81	78	77			
5	93	85	80	76	92	84	79	75	83	78	75	81	77	74	79	76	73	72			
6	89	80	75	70	88	80	74	70	78	73	70	77	73	69	75	72	69	67			
7	85	76	70	66	84	75	70	66	74	69	66	73	68	65	72	68	65	63			
8	81	72	66	62	80	71	66	62	70	65	62	69	65	61	68	64	61	60			
9	77	68	62	59	76	68	62	59	67	62	58	66	61	58	65	61	58	57			
10	74	65	59	55	73	64	59	55	64	59	55	63	58	55	62	58	55	54			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	126273
5°	122320
10°	106667
15°	87481
20°	68349
25°	51947
30°	37708
35°	25665
40°	16517
45°	10102
50°	5083
55°	2017
60°	1228
65°	480
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10102 cd/sqm



TEST NUMBER: P640795

CATALOG NUMBER: ML5612LSFL4097FS1E - 693BB - 900LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	202.1	14.5
10°-20°	426.2	30.5
20°-30°	393.8	28.2
30°-40°	243.6	17.4
40°-50°	104.7	7.5
50°-60°	22.6	1.6
60°-70°	4.1	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1022.1	73.2
0°-40°	1265.8	90.6
0°-60°	1393.0	99.7
0°-90°	1397.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1397.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2303	
5°	2223	202
15°	1541	426
25°	859	394
35°	384	244
45°	130	105
55°	21	23
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P640795

CATALOG NUMBER: ML5612LSFL4097FS1E - 693BB - 900LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2303.4
2.5°	2291.0
5°	2222.8
7.5°	2091.2
10°	1916.2
12.5°	1728.8
15°	1541.4
17.5°	1352.8
20°	1171.6
22.5°	1006.5
25°	858.8
27.5°	721.1
30°	595.7
32.5°	482.8
35°	383.5
37.5°	300.3
40°	230.8
42.5°	178.7
45°	130.3
47.5°	95.6
50°	59.6
52.5°	31.0
55°	21.1
57.5°	14.9
60°	11.2
62.5°	7.4
65°	3.7
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)