

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640836

Luminaire Tested: ML5612LSFL4097FS1E - 693WB - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640836
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-40)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSFL4097FS1E - 693WB - 900LM - 2700K
Description: ML56 RR, 40D TIR OPTIC, 6" WHITE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1248.2 lumens
Efficiency: N/A
Efficacy: 93.8 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640836

CATALOG NUMBER: ML5612LSFL4097FS1E - 693WB - 900LM - 2700K

Luminous Intensity Polar Plot

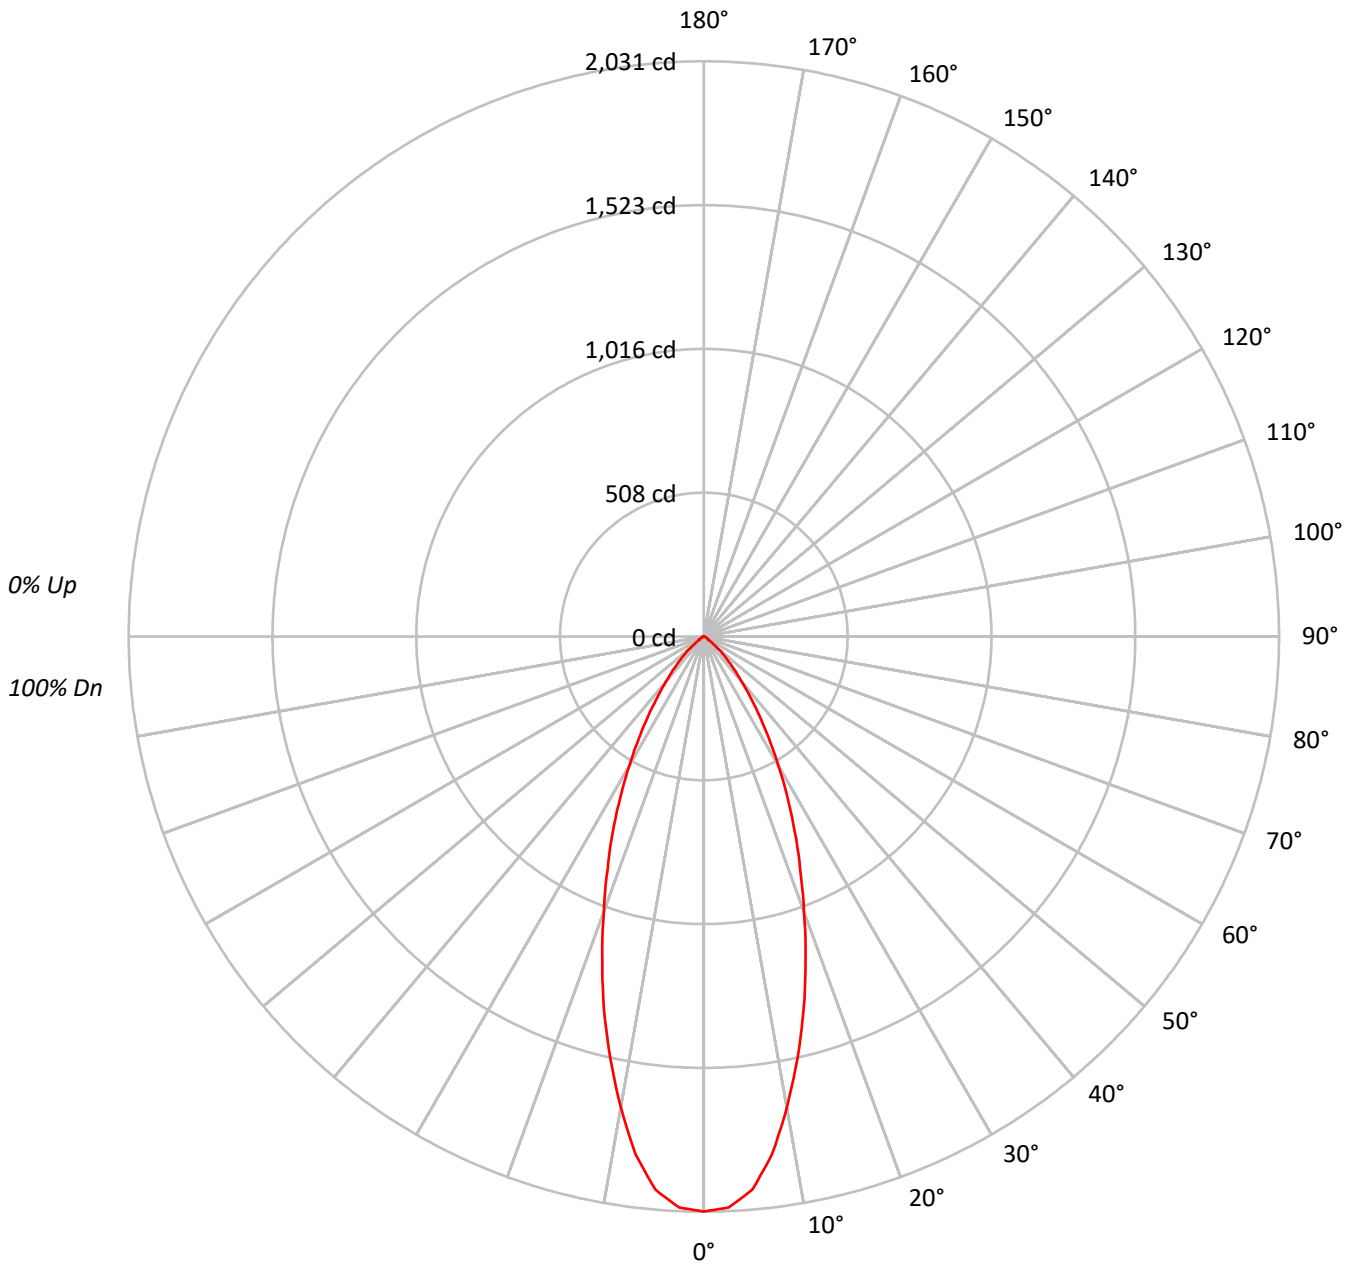



TEST NUMBER: P640836

CATALOG NUMBER: ML5612LSFL4097FS1E - 693WB - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	78	76																			
5	93	85	79	75	91	84	79	75	82	77	74	80	76	73	79	75	73	71																			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																			
7	84	75	70	65	83	75	69	65	73	69	65	72	68	65	71	67	64	63																			
8	81	71	66	62	79	71	65	61	70	65	61	69	64	61	68	64	61	59																			
9	77	68	62	58	76	67	62	58	66	61	58	65	61	58	65	60	57	56																			
10	74	64	59	55	73	64	58	55	63	58	55	62	58	55	62	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	111323
5°	107907
10°	93970
15°	77288
20°	60287
25°	45940
30°	33296
35°	22854
40°	14835
45°	9218
50°	4929
55°	2084
60°	1436
65°	843
70°	529
75°	466
80°	695
85°	692

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 9218 cd/sqm



TEST NUMBER: P640836

CATALOG NUMBER: ML5612LSFL4097FS1E - 693WB - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	178.2	14.3
10°-20°	376.1	30.1
20°-30°	347.8	27.9
30°-40°	216.6	17.4
40°-50°	95.3	7.6
50°-60°	23.3	1.9
60°-70°	6.8	0.5
70°-80°	2.8	0.2
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	902.1	72.3
0°-40°	1118.8	89.6
0°-60°	1237.4	99.1
0°-90°	1248.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1248.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2031	
5°	1961	178
15°	1362	376
25°	760	348
35°	342	217
45°	119	95
55°	22	23
65°	6	7
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P640836

CATALOG NUMBER: ML5612LSFL4097FS1E - 693WB - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2030.7
2.5°	2017.6
5°	1960.9
7.5°	1844.1
10°	1688.1
12.5°	1525.5
15°	1361.8
17.5°	1193.8
20°	1033.4
22.5°	888.2
25°	759.5
27.5°	637.3
30°	526.0
32.5°	427.7
35°	341.5
37.5°	268.4
40°	207.3
42.5°	160.4
45°	118.9
47.5°	88.4
50°	57.8
52.5°	30.6
55°	21.8
57.5°	17.5
60°	13.1
62.5°	9.8
65°	6.5
67.5°	3.3
70°	3.3
72.5°	3.3
75°	2.2
77.5°	2.2
80°	2.2
82.5°	1.1
85°	1.1
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)