

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640839

Luminaire Tested: ML5612LSFL4097FS1E - 693WB - 900LM - 4000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P640839  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-40)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSFL4097FS1E - 693WB - 900LM - 4000K  
Description: ML56 RR, 40D TIR OPTIC, 6" WHITE BAFFLE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1418.9 lumens  
Efficiency: N/A  
Efficacy: 106.7 lumens/watt  
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.69  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 13.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P640839

CATALOG NUMBER: ML5612LSFL4097FS1E - 693WB - 900LM - 4000K

### Luminous Intensity Polar Plot

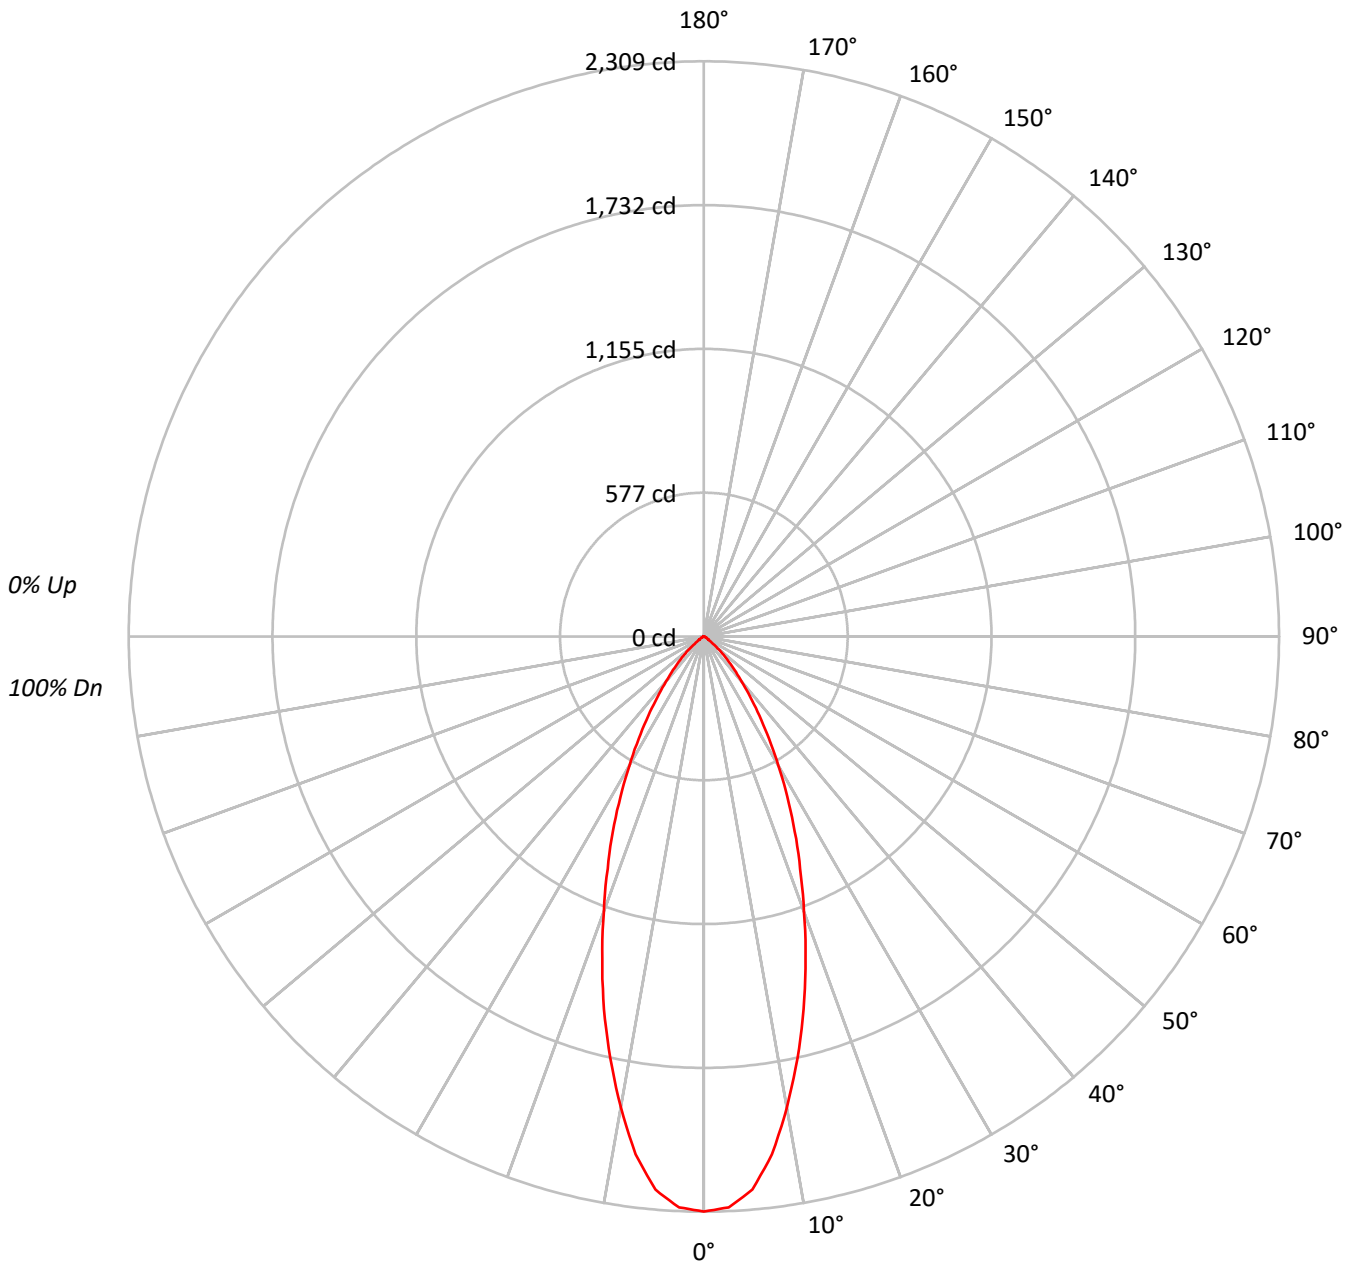



TEST NUMBER: P640839

CATALOG NUMBER: ML5612LSFL4097FS1E - 693WB - 900LM - 4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	78	76																			
5	93	85	79	75	91	84	79	75	82	77	74	80	76	73	79	75	73	71																			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																			
7	84	75	70	65	83	75	69	65	73	69	65	72	68	65	71	67	64	63																			
8	81	71	66	62	79	71	65	61	70	65	61	69	64	61	68	64	61	59																			
9	77	68	62	58	76	67	62	58	66	61	58	65	61	58	65	60	57	56																			
10	74	64	59	55	73	64	58	55	63	58	55	62	58	55	62	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	126558
5°	122672
10°	106828
15°	87861
20°	68536
25°	52225
30°	37848
35°	25986
40°	16867
45°	10482
50°	5603
55°	2370
60°	1634
65°	960
70°	593
75°	530
80°	789
85°	755

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 10482 cd/sqm



TEST NUMBER: P640839

CATALOG NUMBER: ML5612LSFL4097FS1E - 693WB - 900LM - 4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	202.6	14.3
10°-20°	427.6	30.1
20°-30°	395.4	27.9
30°-40°	246.3	17.4
40°-50°	108.4	7.6
50°-60°	26.5	1.9
60°-70°	7.8	0.5
70°-80°	3.1	0.2
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1025.6	72.3
0°-40°	1271.9	89.6
0°-60°	1406.7	99.1
0°-90°	1418.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1418.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2309	
5°	2229	203
15°	1548	428
25°	863	395
35°	388	246
45°	135	108
55°	25	26
65°	7	8
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P640839

CATALOG NUMBER: ML5612LSFL4097FS1E - 693WB - 900LM - 4000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2308.6
2.5°	2293.7
5°	2229.2
7.5°	2096.4
10°	1919.1
12.5°	1734.2
15°	1548.1
17.5°	1357.1
20°	1174.8
22.5°	1009.8
25°	863.4
27.5°	724.5
30°	597.9
32.5°	486.3
35°	388.3
37.5°	305.2
40°	235.7
42.5°	182.4
45°	135.2
47.5°	100.5
50°	65.7
52.5°	34.7
55°	24.8
57.5°	19.8
60°	14.9
62.5°	11.2
65°	7.4
67.5°	3.7
70°	3.7
72.5°	3.7
75°	2.5
77.5°	2.5
80°	2.5
82.5°	1.2
85°	1.2
87.5°	1.2
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)