

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640888

Luminaire Tested: ML5612LSNFL2597FS1E - 591WB - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640888
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 591WB - 1200LM - 3500K
Description: ML56 RR, 25D TIR OPTIC, 5" DEADFRONT TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1482.0 lumens
Efficiency: N/A
Efficacy: 89.8 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640888

CATALOG NUMBER: ML5612LSNFL2597FS1E - 591WB - 1200LM - 3500K

Luminous Intensity Polar Plot

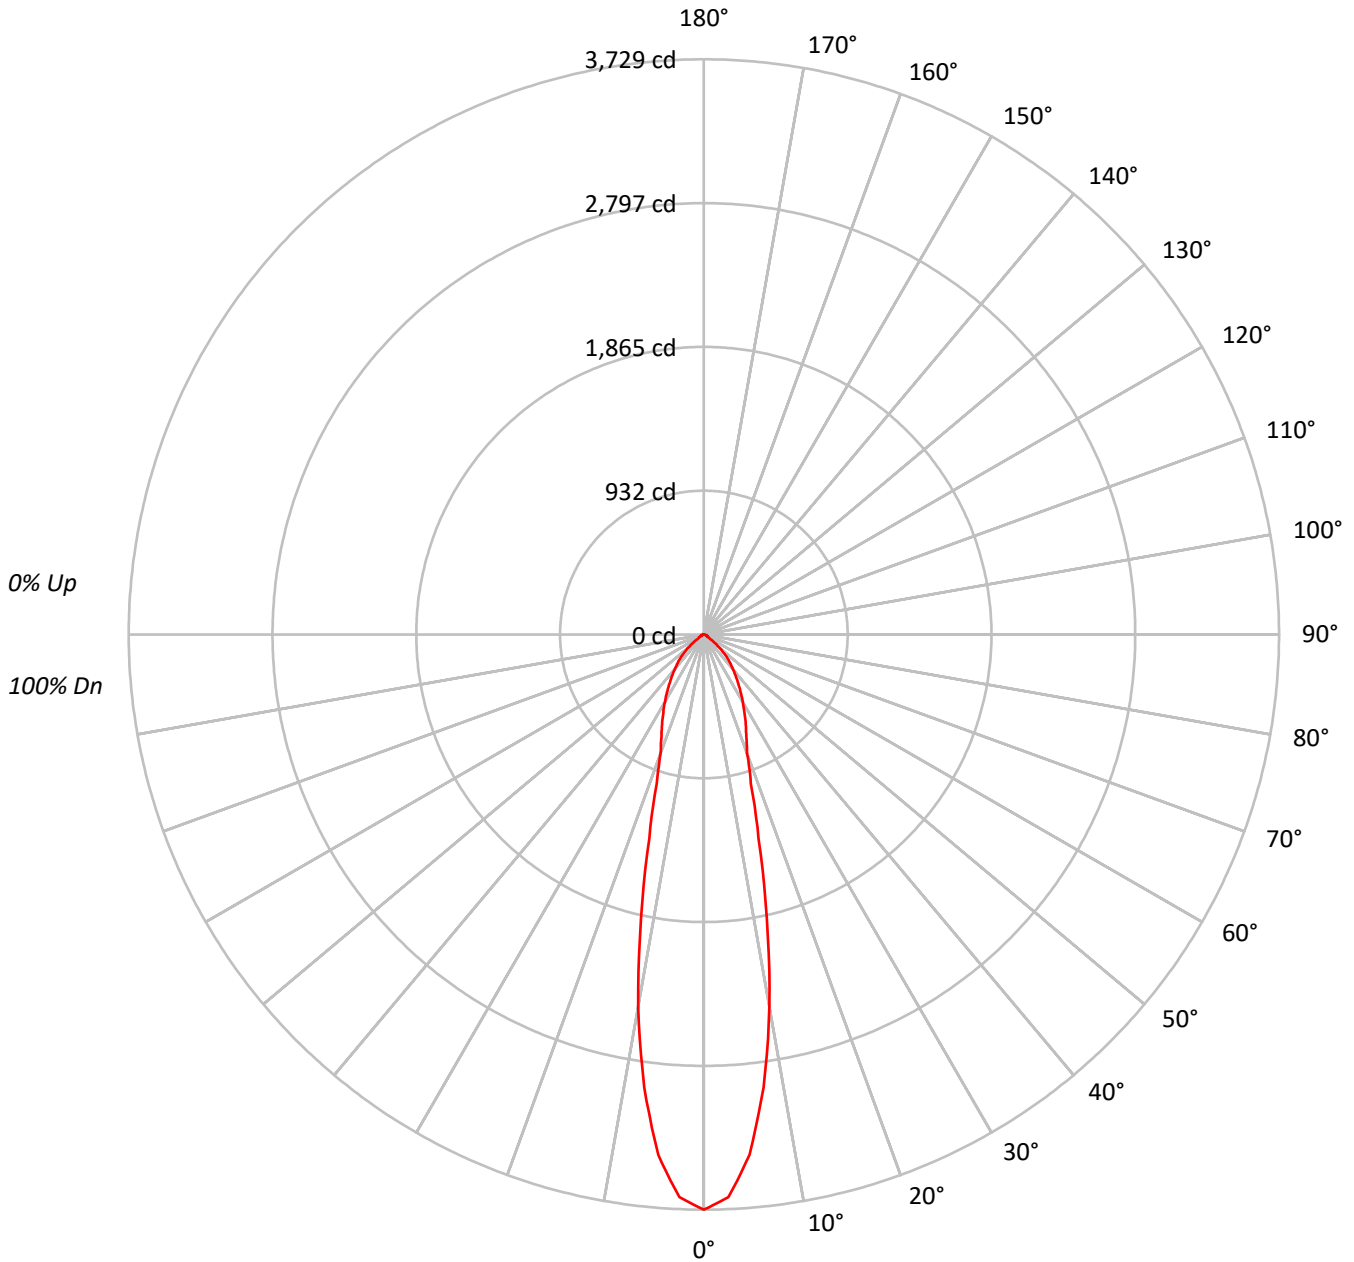



TEST NUMBER: P640888

CATALOG NUMBER: ML5612LSNFL2597FS1E - 591WB - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	75																			
5	92	84	78	74	90	83	77	73	81	76	73	79	75	72	78	74	71	70																			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	66																			
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62																			
8	80	71	65	61	79	70	64	61	69	64	60	68	63	60	67	63	60	58																			
9	77	67	61	58	76	67	61	57	66	61	57	65	60	57	64	60	57	56																			
10	73	64	58	55	72	64	58	55	63	58	54	62	58	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	294347
5°	268370
10°	196389
15°	111809
20°	68835
25°	55937
30°	46060
35°	37401
40°	30214
45°	24159
50°	15769
55°	6923
60°	4405
65°	3904
70°	3554
75°	3416
80°	3819
85°	3804

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 24159 cd/sqm



TEST NUMBER: P640888

CATALOG NUMBER: ML5612LSNFL2597FS1E - 591WB - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	292.7	19.8
10°-20°	393.8	26.6
20°-30°	295.7	20.0
30°-40°	243.8	16.5
40°-50°	162.6	11.0
50°-60°	55.1	3.7
60°-70°	21.2	1.4
70°-80°	12.0	0.8
80°-90°	5.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	982.3	66.3
0°-40°	1226.1	82.7
0°-60°	1443.8	97.4
0°-90°	1482.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1482.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3729	
5°	3387	293
15°	1368	394
25°	642	296
35°	388	244
45°	216	163
55°	50	55
65°	21	21
75°	11	12
85°	4	5
90°	0	



TEST NUMBER: P640888

CATALOG NUMBER: ML5612LSNFL2597FS1E - 591WB - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3728.7
2.5°	3651.9
5°	3386.7
7.5°	2960.9
10°	2450.0
12.5°	1880.4
15°	1368.1
17.5°	1014.9
20°	819.4
22.5°	717.5
25°	642.2
27.5°	569.6
30°	505.3
32.5°	443.9
35°	388.1
37.5°	337.8
40°	293.2
42.5°	252.7
45°	216.4
47.5°	168.9
50°	128.4
52.5°	87.9
55°	50.3
57.5°	33.5
60°	27.9
62.5°	25.1
65°	20.9
67.5°	18.1
70°	15.4
72.5°	12.6
75°	11.2
77.5°	9.8
80°	8.4
82.5°	7.0
85°	4.2
87.5°	2.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)