

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640911

Luminaire Tested: ML5612LSNFL2597FS1E - 592H - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640911
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-3)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 592H - 900LM - 2700K
Description: ML56 RR, 25D TIR OPTIC, 5" HAZE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1147.8 lumens
Efficiency: N/A
Efficacy: 86.3 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640911

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592H - 900LM - 2700K

Luminous Intensity Polar Plot

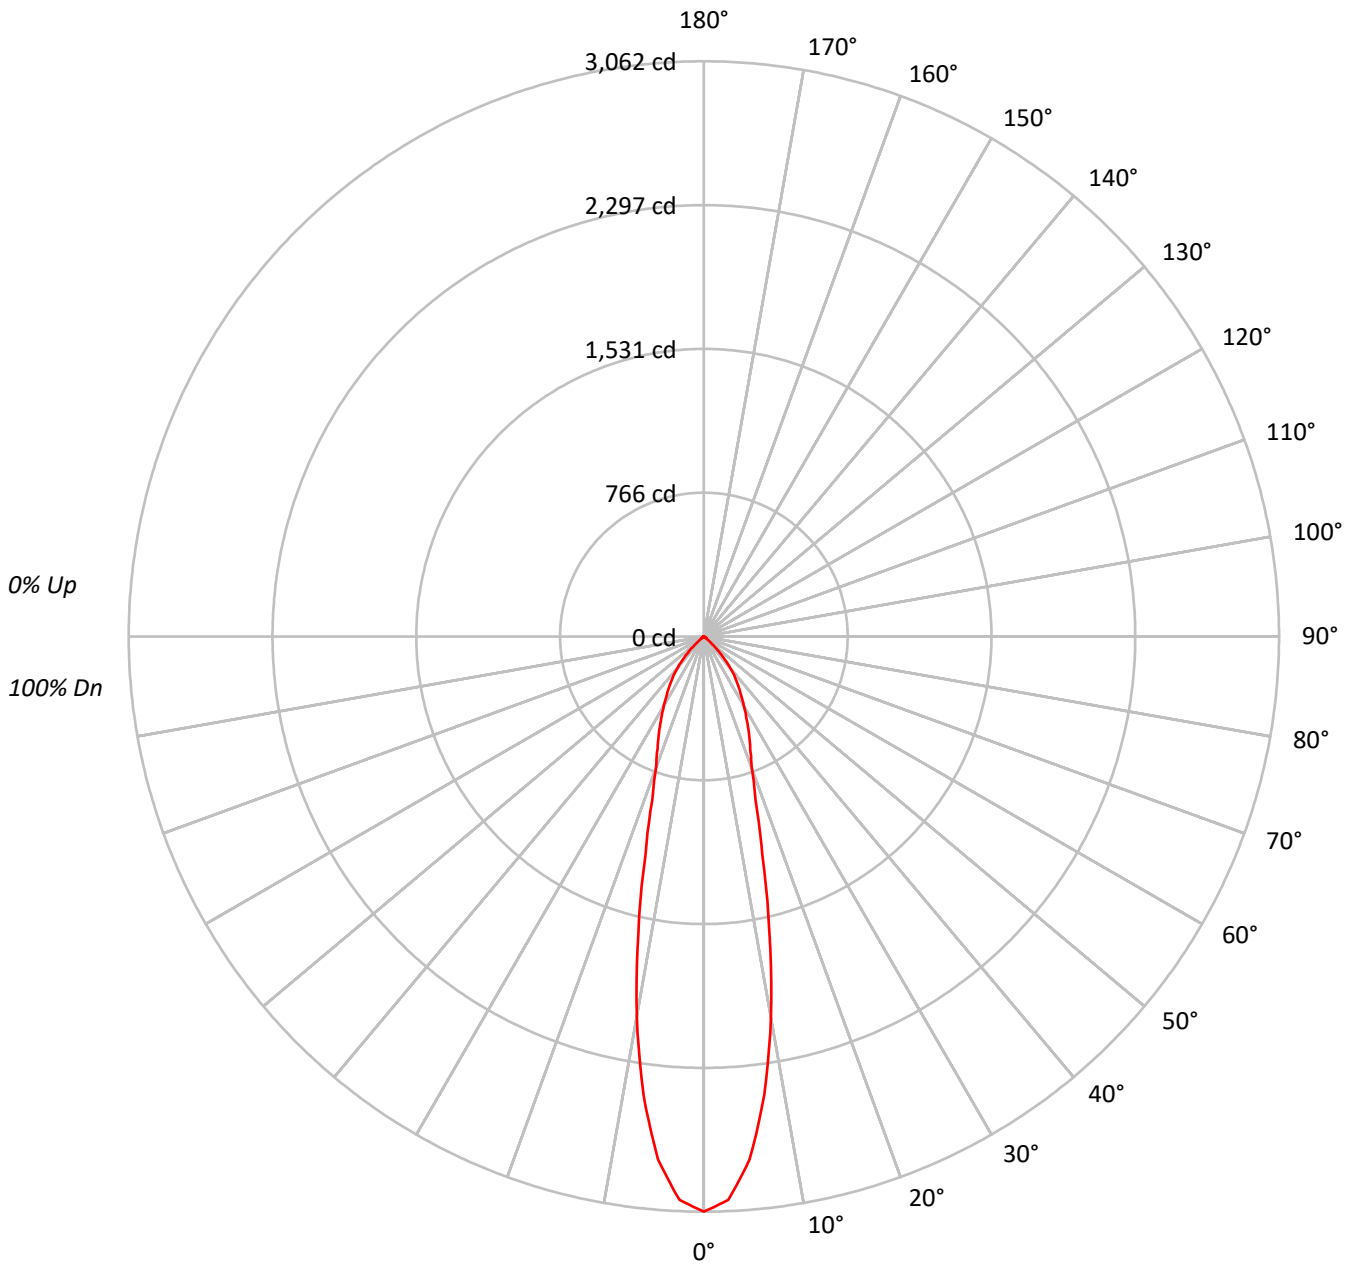



TEST NUMBER: P640911

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592H - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94																			
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89																			
3	104	98	93	90	102	97	92	89	94	90	88	92	89	86	89	87	85	83																			
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	79																			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74																			
6	91	82	77	73	89	82	77	73	80	76	72	79	75	72	78	74	71	70																			
7	87	78	73	69	86	78	72	69	76	72	68	75	71	68	74	71	68	66																			
8	83	75	69	65	82	74	69	65	73	68	65	72	68	65	71	67	64	63																			
9	80	71	66	62	79	71	65	62	70	65	62	69	65	62	68	64	61	60																			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	65	61	59	57																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	241701
5°	221499
10°	164959
15°	98373
20°	62401
25°	49282
30°	38831
35°	30424
40°	22630
45°	12682
50°	3218
55°	1652
60°	1200
65°	411
70°	254
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12682 cd/sqm



TEST NUMBER: P640911

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592H - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	242.8	21.2
10°-20°	344.2	30.0
20°-30°	260.2	22.7
30°-40°	198.0	17.3
40°-50°	87.0	7.6
50°-60°	12.2	1.1
60°-70°	2.9	0.3
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	847.1	73.8
0°-40°	1045.1	91.1
0°-60°	1144.4	99.7
0°-90°	1147.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1147.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3062	
5°	2795	243
15°	1204	344
25°	566	260
35°	316	198
45°	114	87
55°	12	12
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P640911

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592H - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3061.8
2.5°	3001.7
5°	2795.2
7.5°	2462.1
10°	2057.9
12.5°	1611.2
15°	1203.7
17.5°	915.4
20°	742.8
22.5°	644.5
25°	565.8
27.5°	490.5
30°	426.0
32.5°	367.0
35°	315.7
37.5°	270.9
40°	219.6
42.5°	163.8
45°	113.6
47.5°	60.1
50°	26.2
52.5°	16.4
55°	12.0
57.5°	9.8
60°	7.6
62.5°	4.4
65°	2.2
67.5°	1.1
70°	1.1
72.5°	1.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)