

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640919

Luminaire Tested: ML5612LSNFL2597FS1E - 592SC - 1200LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640919
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-2)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 592SC - 1200LM - 4000K
Description: ML56 RR, 25D TIR OPTIC, 5" SPECULAR CLEAR TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1597.5 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.48
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640919
CATALOG NUMBER: ML5612LSNFL2597FS1E - 592SC - 1200LM - 4000K

Luminous Intensity Polar Plot

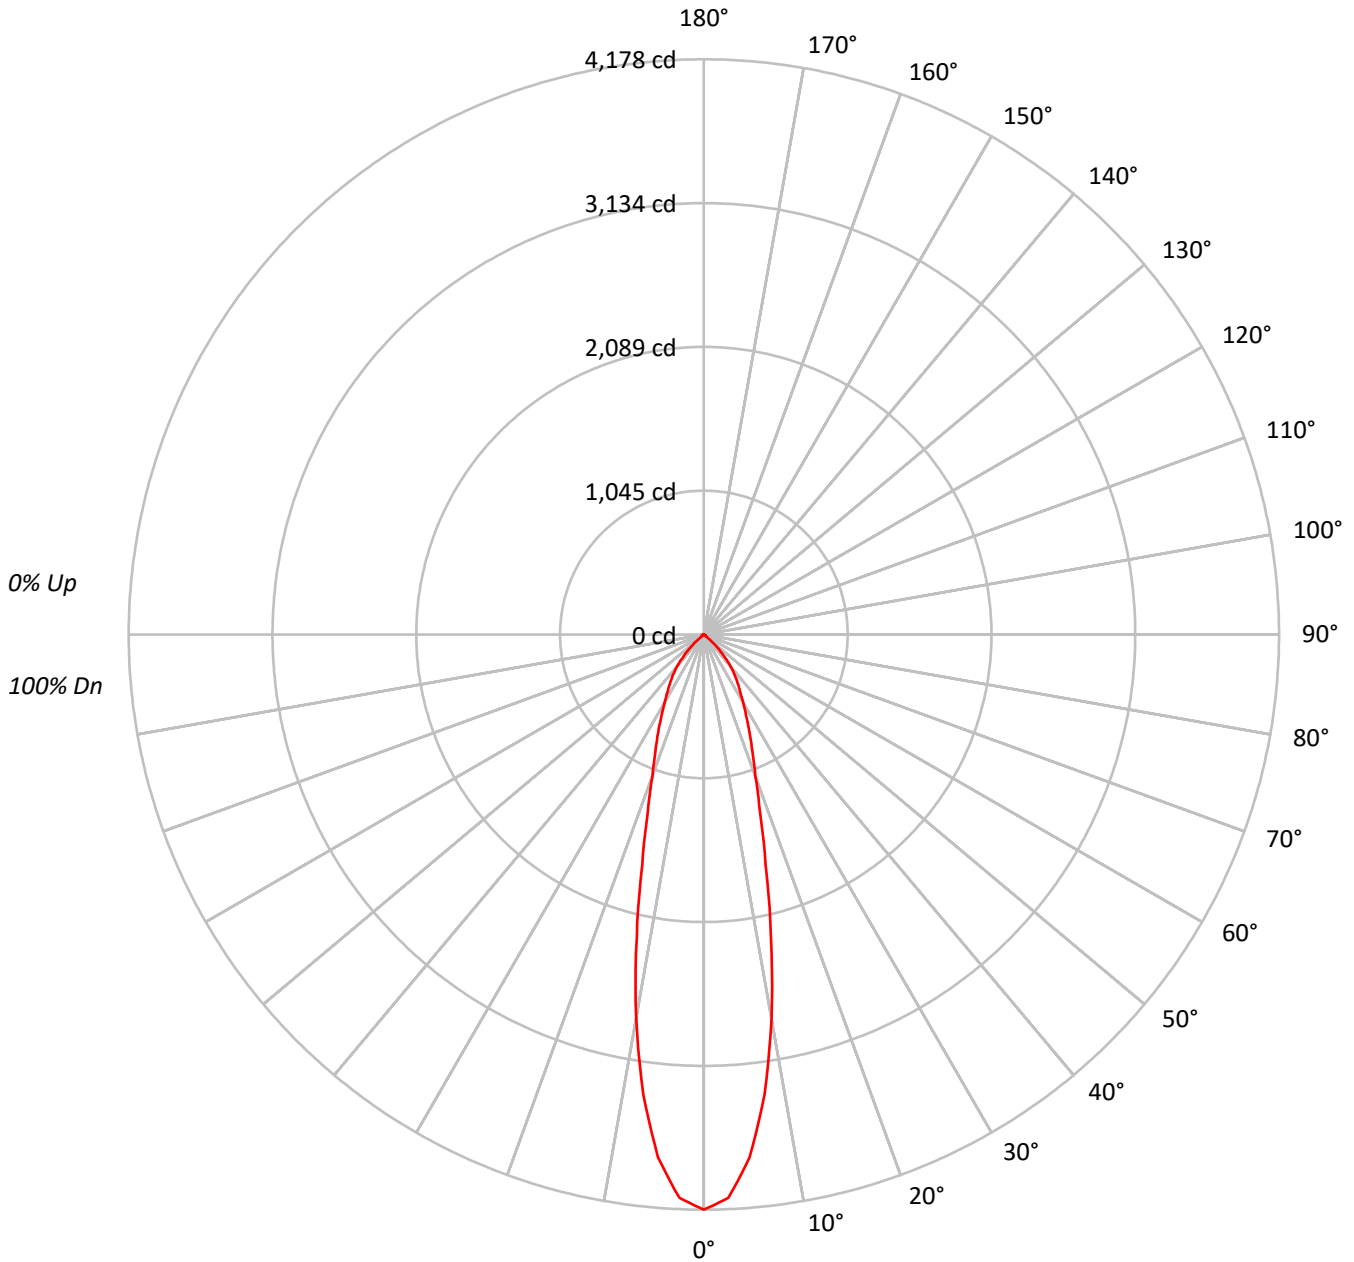



TEST NUMBER: P640919

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592SC - 1200LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94																			
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89																			
3	104	98	93	90	102	97	92	89	94	91	88	92	89	86	89	87	85	83																			
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	79																			
5	95	87	82	78	93	86	81	78	85	80	77	83	79	76	81	78	76	74																			
6	91	83	77	73	89	82	77	73	80	76	72	79	75	72	78	74	71	70																			
7	87	78	73	69	86	78	73	69	77	72	69	75	71	68	74	71	68	67																			
8	83	75	69	65	82	74	69	65	73	68	65	72	68	65	71	67	64	63																			
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	60																			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	65	62	59	58																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	329791
5°	302128
10°	226985
15°	141312
20°	91618
25°	68436
30°	51757
35°	40966
40°	31276
45°	18108
50°	4802
55°	2064
60°	1421
65°	560
70°	346
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18108 cd/sqm



TEST NUMBER: P640919

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592SC - 1200LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	332.1	20.8
10°-20°	491.8	30.8
20°-30°	363.1	22.7
30°-40°	266.3	16.7
40°-50°	124.0	7.8
50°-60°	16.3	1.0
60°-70°	3.9	0.2
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1187.0	74.3
0°-40°	1453.2	91.0
0°-60°	1593.5	99.7
0°-90°	1597.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1597.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4178	
5°	3813	332
15°	1729	492
25°	786	363
35°	425	266
45°	162	124
55°	15	16
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P640919

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592SC - 1200LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	4177.7
2.5°	4096.6
5°	3812.7
7.5°	3369.5
10°	2831.7
12.5°	2253.4
15°	1729.1
17.5°	1355.0
20°	1090.6
22.5°	919.4
25°	785.7
27.5°	664.0
30°	567.8
32.5°	488.2
35°	425.1
37.5°	366.5
40°	303.5
42.5°	229.8
45°	162.2
47.5°	91.6
50°	39.1
52.5°	22.5
55°	15.0
57.5°	12.0
60°	9.0
62.5°	6.0
65°	3.0
67.5°	1.5
70°	1.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)