

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640938

Luminaire Tested: ML5612LSNFL2597FS1E - 592W - 600LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640938
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 592W - 600LM - 3500K
Description: ML56 RR, 25D TIR OPTIC, 5" WHITE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 939.0 lumens
Efficiency: N/A
Efficacy: 91.2 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640938

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592W - 600LM - 3500K

Luminous Intensity Polar Plot

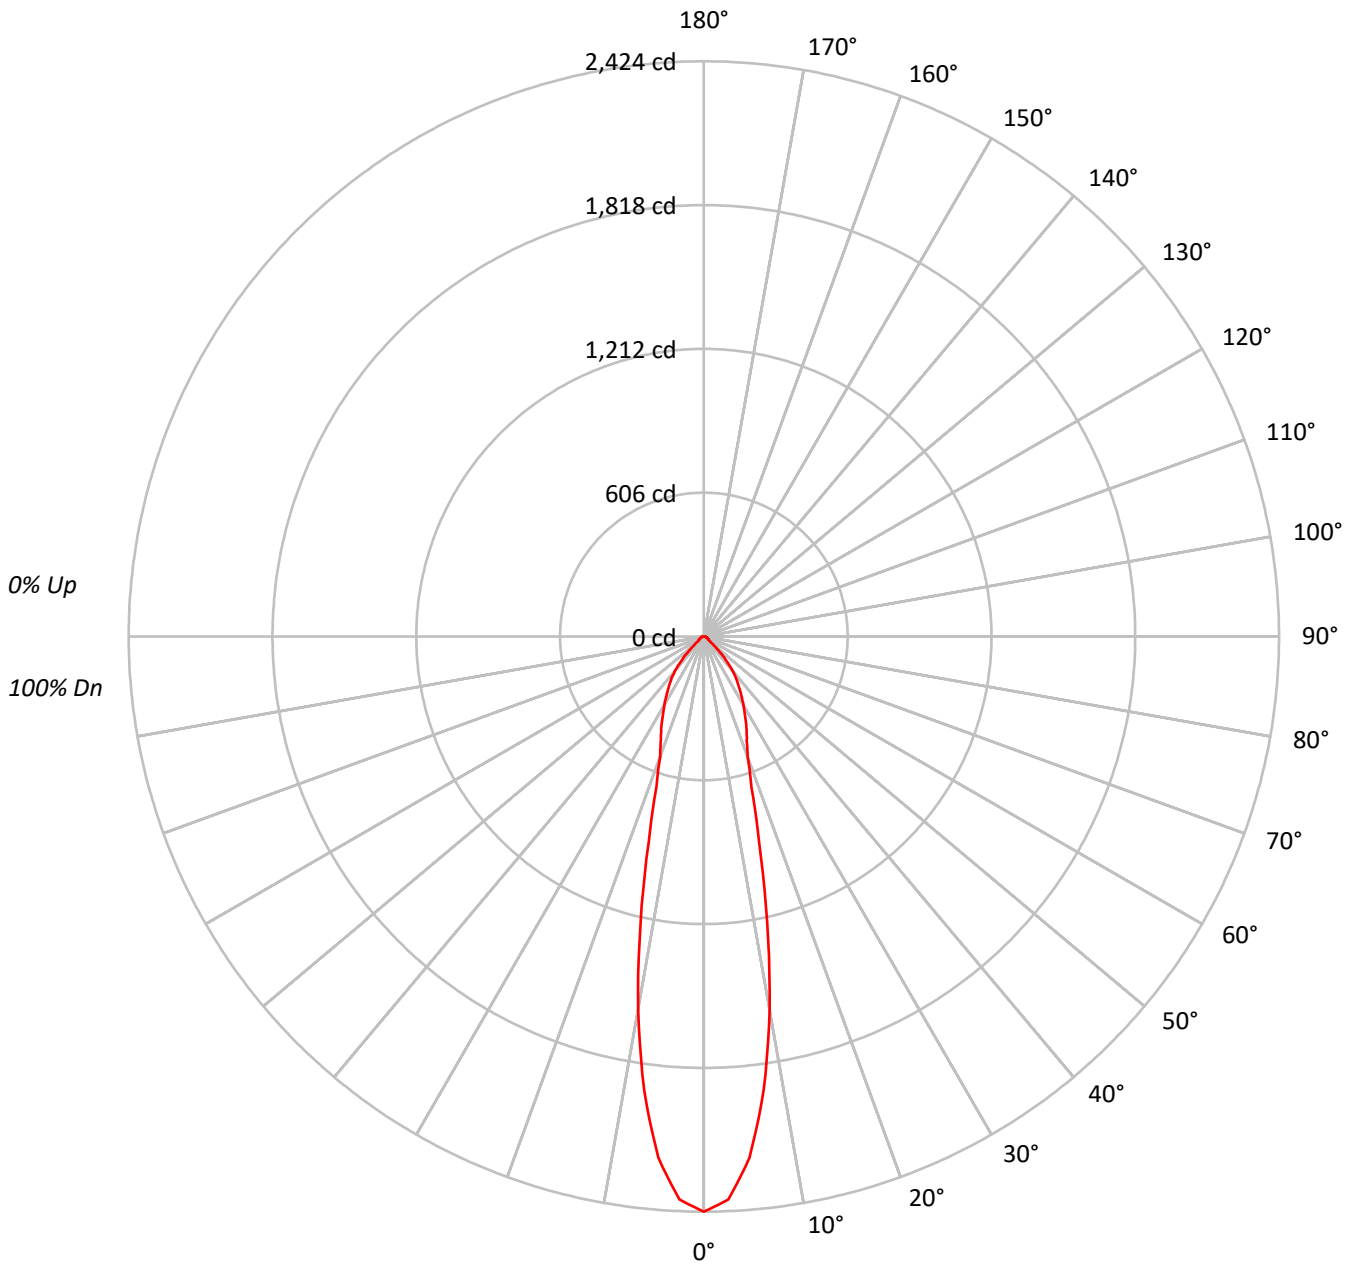



TEST NUMBER: P640938

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592W - 600LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	106	111	108	106	104	104	102	101	100	99	98	97	96	95	93																			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	81																			
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	79	77	75																			
5	93	84	79	74	91	84	78	74	82	77	73	80	76	73	79	75	72	71																			
6	88	80	74	70	87	79	73	69	77	73	69	76	72	69	75	71	68	67																			
7	85	76	70	66	83	75	69	65	74	69	65	72	68	65	71	67	64	63																			
8	81	72	66	62	80	71	66	62	70	65	62	69	65	61	68	64	61	60																			
9	78	68	63	59	76	68	62	59	67	62	59	66	62	58	65	61	58	57																			
10	74	65	60	56	73	65	59	56	64	59	56	63	59	56	63	58	55	54																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	191353
5°	174706
10°	127901
15°	73422
20°	45213
25°	36940
30°	30299
35°	24680
40°	19446
45°	12035
50°	4519
55°	3468
60°	3268
65°	3026
70°	2908
75°	3020
80°	2864
85°	2446

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12035 cd/sqm



TEST NUMBER: P640938

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592W - 600LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	190.6	20.3
10°-20°	257.9	27.5
20°-30°	194.9	20.8
30°-40°	160.5	17.1
40°-50°	82.1	8.7
50°-60°	23.5	2.5
60°-70°	16.1	1.7
70°-80°	10.3	1.1
80°-90°	3.1	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	643.3	68.5
0°-40°	803.9	85.6
0°-60°	909.5	96.9
0°-90°	939.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	939.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2424	
5°	2205	191
15°	898	258
25°	424	195
35°	256	161
45°	108	82
55°	25	23
65°	16	16
75°	10	10
85°	3	3
90°	0	



TEST NUMBER: P640938

CATALOG NUMBER: ML5612LSNFL2597FS1E - 592W - 600LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2424.0
2.5°	2375.4
5°	2204.7
7.5°	1929.8
10°	1595.6
12.5°	1229.0
15°	898.4
17.5°	665.7
20°	538.2
22.5°	472.6
25°	424.1
27.5°	375.5
30°	332.4
32.5°	292.9
35°	256.1
37.5°	223.7
40°	188.7
42.5°	145.5
45°	107.8
47.5°	66.5
50°	36.8
52.5°	28.7
55°	25.2
57.5°	22.5
60°	20.7
62.5°	18.0
65°	16.2
67.5°	14.4
70°	12.6
72.5°	11.7
75°	9.9
77.5°	8.1
80°	6.3
82.5°	4.5
85°	2.7
87.5°	0.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)