

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640966

Luminaire Tested: ML5612LSNFL2597FS1E - 593SNB - 600LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640966
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 593SNB - 600LM - 2700K
Description: ML56 RR, 25D TIR OPTIC, 5" SATIN NICKLE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 856.4 lumens
Efficiency: N/A
Efficacy: 83.1 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640966
CATALOG NUMBER: ML5612LSNFL2597FS1E - 593SNB - 600LM - 2700K

Luminous Intensity Polar Plot

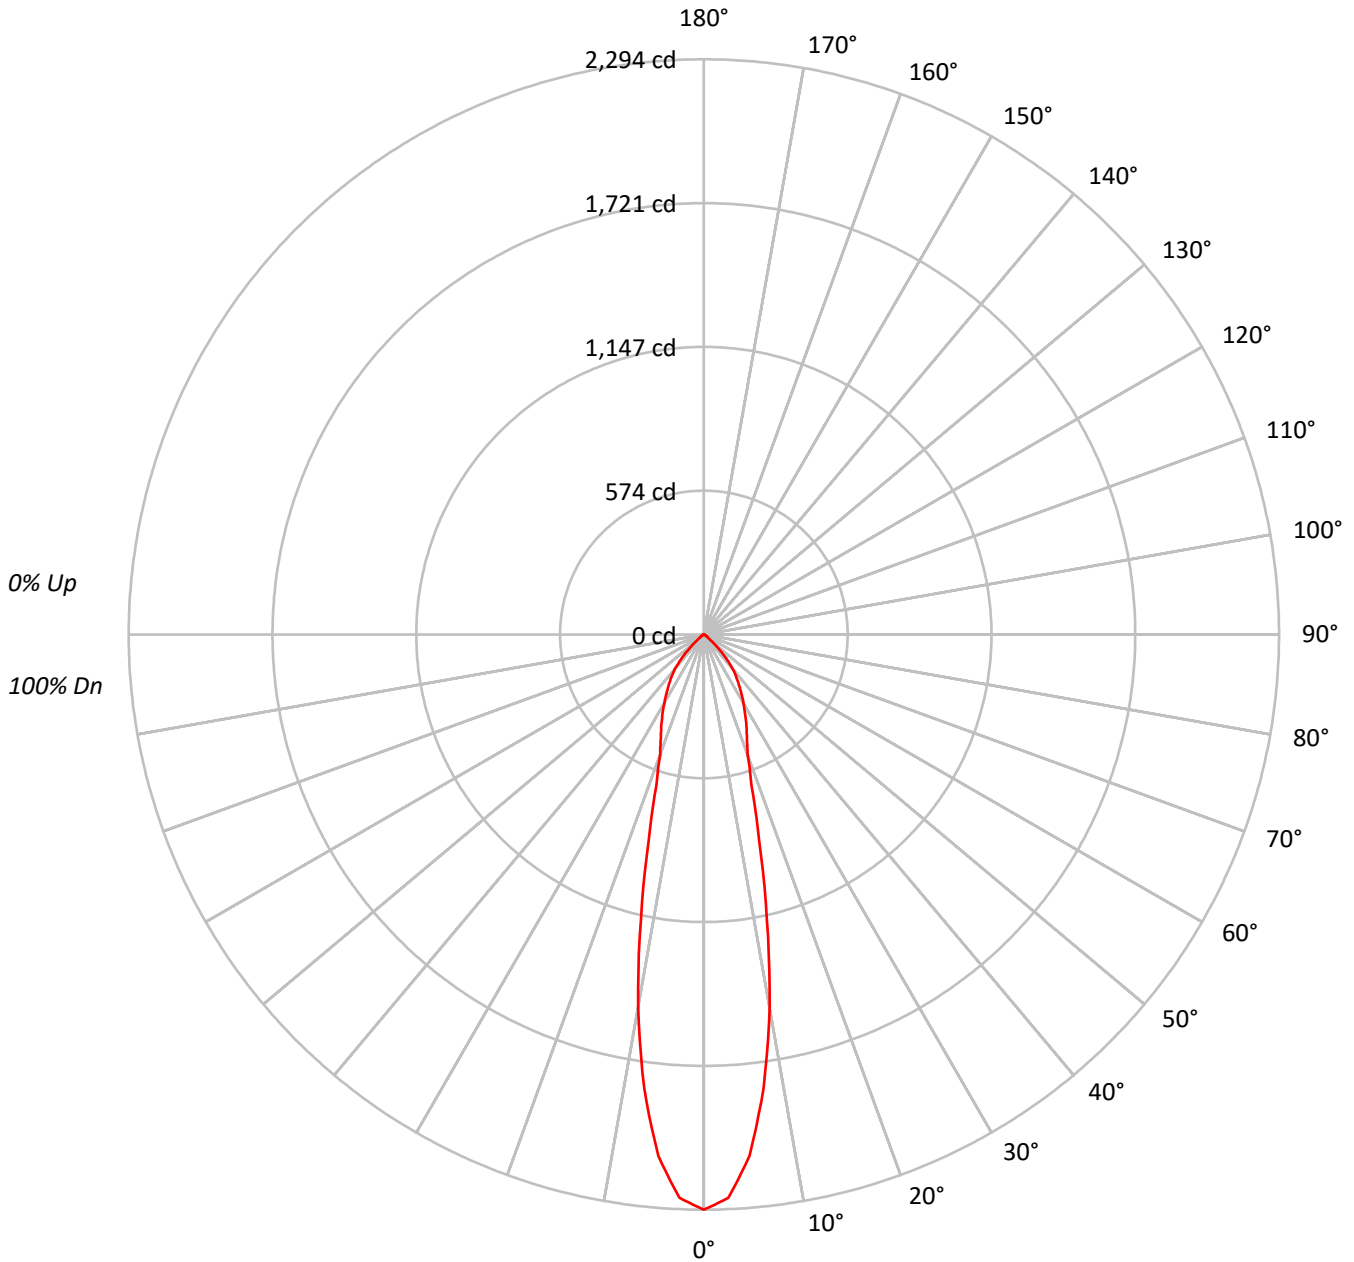



TEST NUMBER: P640966

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593SNB - 600LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94				94
2	108	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88				88
3	103	97	93	89	101	96	92	88	93	90	87	91	88	85	89	86	84	83				83
4	99	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77				77
5	94	86	81	77	92	85	80	76	84	79	76	82	78	75	80	77	74	73				73
6	90	82	76	72	88	81	75	72	79	75	71	78	74	71	77	73	70	69				69
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	66	65				65
8	82	73	68	64	81	73	68	64	72	67	64	71	67	63	70	66	63	62				62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59				59
10	76	67	61	58	75	66	61	58	66	61	58	65	61	58	64	60	57	56				56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	181114
5°	165363
10°	120927
15°	69426
20°	42793
25°	34963
30°	28759
35°	23360
40°	18405
45°	11197
50°	3549
55°	1872
60°	1342
65°	803
70°	392
75°	275
80°	409
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11197 cd/sqm



TEST NUMBER: P640966

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593SNB - 600LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	180.3	21.1
10°-20°	243.9	28.5
20°-30°	184.6	21.6
30°-40°	151.7	17.7
40°-50°	76.3	8.9
50°-60°	13.6	1.6
60°-70°	4.4	0.5
70°-80°	1.3	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	608.8	71.1
0°-40°	760.5	88.8
0°-60°	850.4	99.3
0°-90°	856.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	856.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2294	
5°	2087	180
15°	850	244
25°	401	185
35°	242	152
45°	100	76
55°	14	14
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P640966

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593SNB - 600LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2294.3
2.5°	2248.4
5°	2086.8
7.5°	1824.1
10°	1508.6
12.5°	1160.8
15°	849.5
17.5°	631.0
20°	509.4
22.5°	447.3
25°	401.4
27.5°	356.3
30°	315.5
32.5°	277.2
35°	242.4
37.5°	210.0
40°	178.6
42.5°	136.9
45°	100.3
47.5°	61.2
50°	28.9
52.5°	17.9
55°	13.6
57.5°	11.1
60°	8.5
62.5°	6.0
65°	4.3
67.5°	2.6
70°	1.7
72.5°	1.7
75°	0.9
77.5°	0.9
80°	0.9
82.5°	0.9
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)