

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640970

Luminaire Tested: ML5612LSNFL2597FS1E - 593SNB - 600LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640970
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 593SNB - 600LM - 5000K
Description: ML56 RR, 25D TIR OPTIC, 5" SATIN NICKLE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 973.9 lumens
Efficiency: N/A
Efficacy: 94.6 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640970
CATALOG NUMBER: ML5612LSNFL2597FS1E - 593SNB - 600LM - 5000K

Luminous Intensity Polar Plot

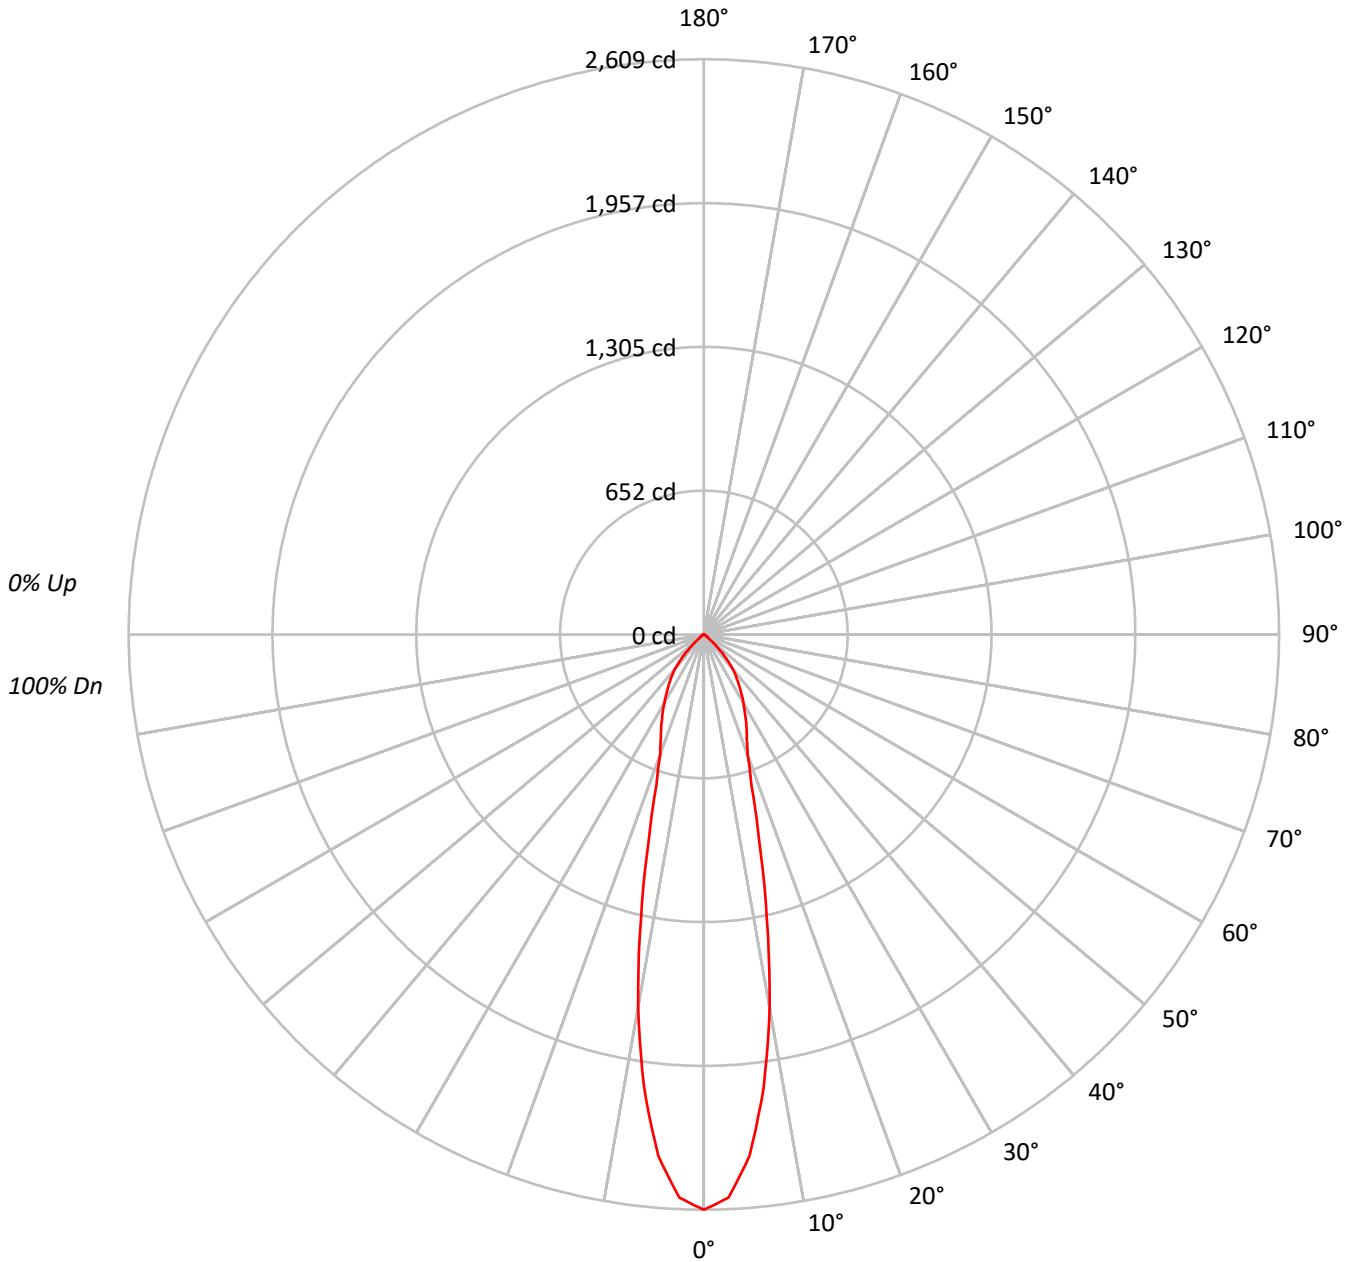



TEST NUMBER: P640970

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593SNB - 600LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	108	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88			
3	103	97	93	89	101	96	92	88	93	90	87	91	88	85	89	86	84	83			
4	99	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77			
5	94	86	81	77	93	85	80	76	84	79	76	82	78	75	80	77	74	73			
6	90	82	76	72	88	81	75	72	79	75	71	78	74	71	77	73	70	69			
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	66	65			
8	82	73	68	64	81	73	68	64	72	67	64	71	67	63	70	66	63	62			
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59			
10	76	67	61	58	75	66	61	58	66	61	58	65	61	58	64	60	57	56			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	205973
5°	188066
10°	137520
15°	78955
20°	48665
25°	39762
30°	32706
35°	26559
40°	20929
45°	12738
50°	4040
55°	2133
60°	1531
65°	897
70°	439
75°	305
80°	455
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12738 cd/sqm



TEST NUMBER: P640970

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593SNB - 600LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	205.0	21.1
10°-20°	277.4	28.5
20°-30°	209.9	21.6
30°-40°	172.6	17.7
40°-50°	86.8	8.9
50°-60°	15.5	1.6
60°-70°	5.0	0.5
70°-80°	1.4	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	692.4	71.1
0°-40°	864.9	88.8
0°-60°	967.1	99.3
0°-90°	973.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	973.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2609	
5°	2373	205
15°	966	277
25°	456	210
35°	276	173
45°	114	87
55°	16	15
65°	5	5
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P640970

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593SNB - 600LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2609.2
2.5°	2557.0
5°	2373.3
7.5°	2074.4
10°	1715.6
12.5°	1320.1
15°	966.1
17.5°	717.6
20°	579.3
22.5°	508.7
25°	456.5
27.5°	405.2
30°	358.8
32.5°	315.3
35°	275.6
37.5°	238.9
40°	203.1
42.5°	155.7
45°	114.1
47.5°	69.6
50°	32.9
52.5°	20.3
55°	15.5
57.5°	12.6
60°	9.7
62.5°	6.8
65°	4.8
67.5°	2.9
70°	1.9
72.5°	1.9
75°	1.0
77.5°	1.0
80°	1.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)