

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640980

Luminaire Tested: ML5612LSNFL2597FS1E - 593TBZB - 1200LM - 5000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P640980  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-8)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSNFL2597FS1E - 593TBZB - 1200LM - 5000K  
Description: ML56 RR, 25D TIR OPTIC, 5" TUSCON BRONZE BAFFLE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1464.0 lumens  
Efficiency: N/A  
Efficacy: 88.7 lumens/watt  
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct


Input Watts (W): 16.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P640980

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593TBZB - 1200LM - 5000K

### Luminous Intensity Polar Plot

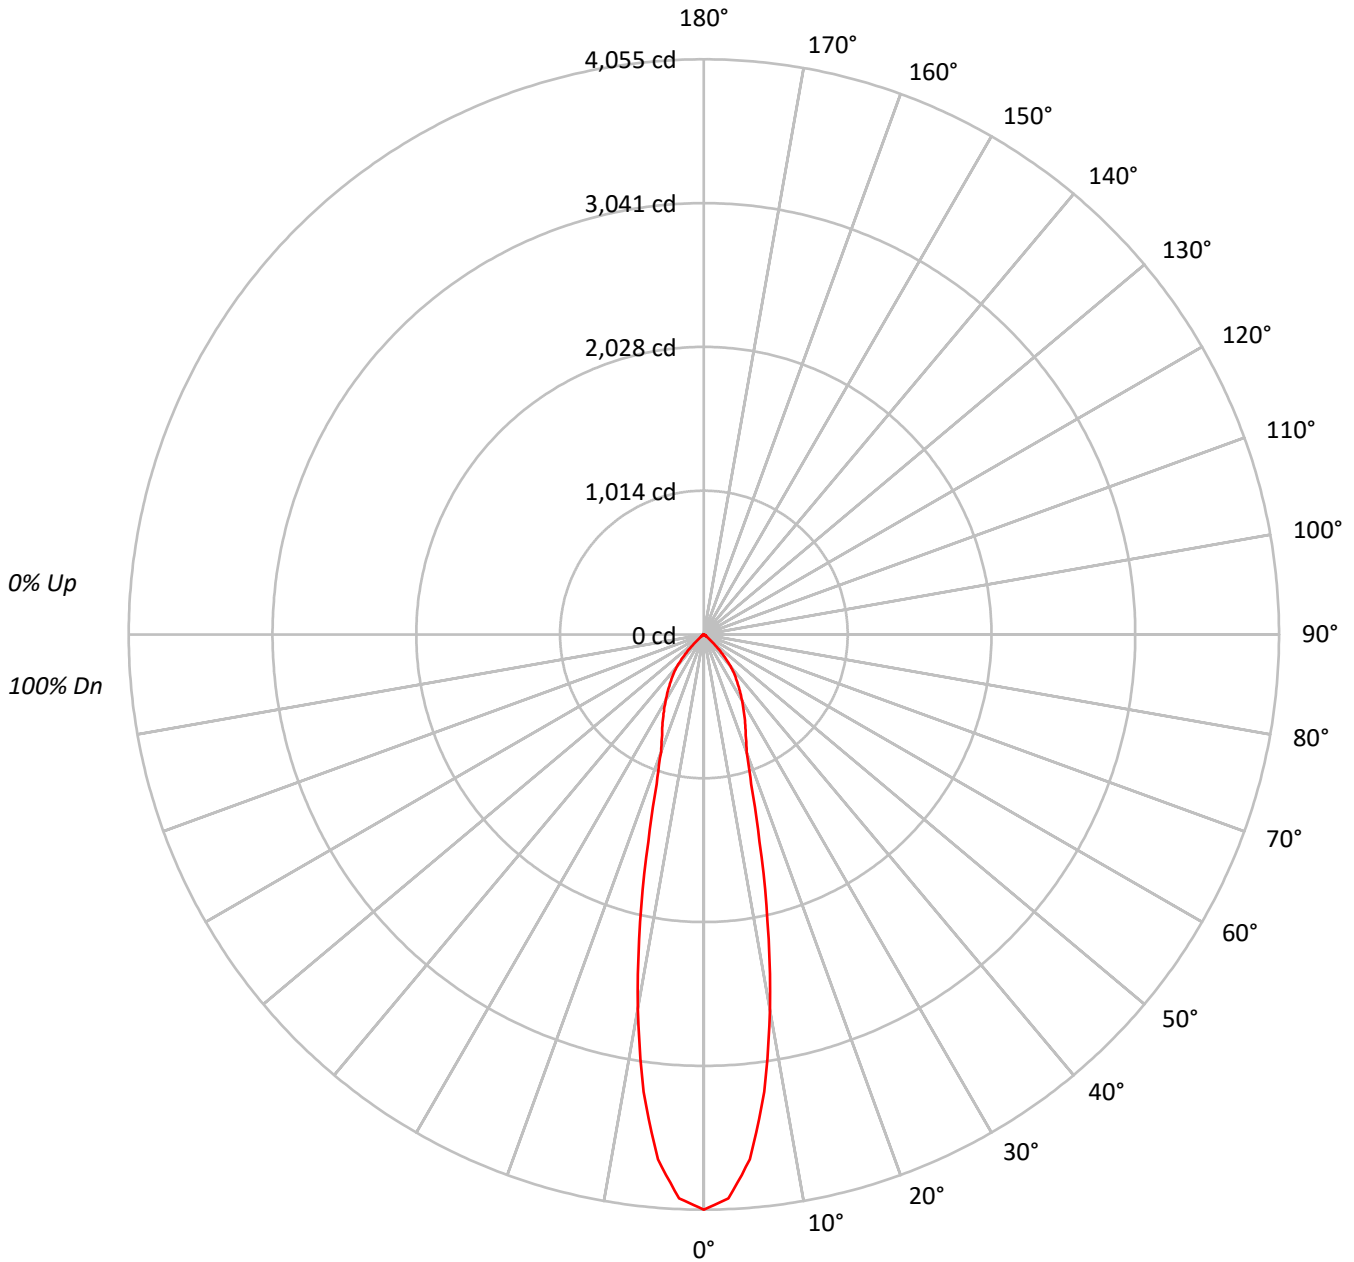



TEST NUMBER: P640980

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593TBZB - 1200LM - 5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94																			
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89																			
3	104	98	93	90	102	97	92	89	94	90	88	92	89	86	89	87	85	83																			
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78																			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74																			
6	91	82	77	73	89	82	77	73	80	76	72	79	75	72	78	74	71	70																			
7	87	78	73	69	86	78	72	69	76	72	68	75	71	68	74	71	68	66																			
8	83	75	69	65	82	74	69	65	73	68	65	72	68	65	71	67	64	63																			
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	60																			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	65	62	59	58																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	320137
5°	294338
10°	215114
15°	123536
20°	73968
25°	59943
30°	49031
35°	39531
40°	30194
45°	16947
50°	4433
55°	2271
60°	1421
65°	560
70°	346
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16947 cd/sqm



TEST NUMBER: P640980

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593TBZB - 1200LM - 5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	320.7	21.9
10°-20°	431.9	29.5
20°-30°	316.8	21.6
30°-40°	256.5	17.5
40°-50°	117.0	8.0
50°-60°	16.6	1.1
60°-70°	3.9	0.3
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1069.5	73.1
0°-40°	1326.0	90.6
0°-60°	1459.6	99.7
0°-90°	1464.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1464.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4055	
5°	3714	321
15°	1512	432
25°	688	317
35°	410	257
45°	152	117
55°	16	17
65°	3	4
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P640980

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593TBZB - 1200LM - 5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4055.4
2.5°	3978.8
5°	3714.4
7.5°	3253.1
10°	2683.6
12.5°	2073.5
15°	1511.6
17.5°	1105.9
20°	880.5
22.5°	769.3
25°	688.2
27.5°	610.0
30°	537.9
32.5°	471.8
35°	410.2
37.5°	354.6
40°	293.0
42.5°	217.9
45°	151.8
47.5°	84.1
50°	36.1
52.5°	22.5
55°	16.5
57.5°	13.5
60°	9.0
62.5°	6.0
65°	3.0
67.5°	1.5
70°	1.5
72.5°	1.5
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)