

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P640986

Luminaire Tested: ML5612LSNFL2597FS1E - 593TBZB - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P640986
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 593TBZB - 900LM - 2700K
Description: ML56 RR, 25D TIR OPTIC, 5" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1063.4 lumens
Efficiency: N/A
Efficacy: 80.0 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P640986

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593TBZB - 900LM - 2700K

Luminous Intensity Polar Plot

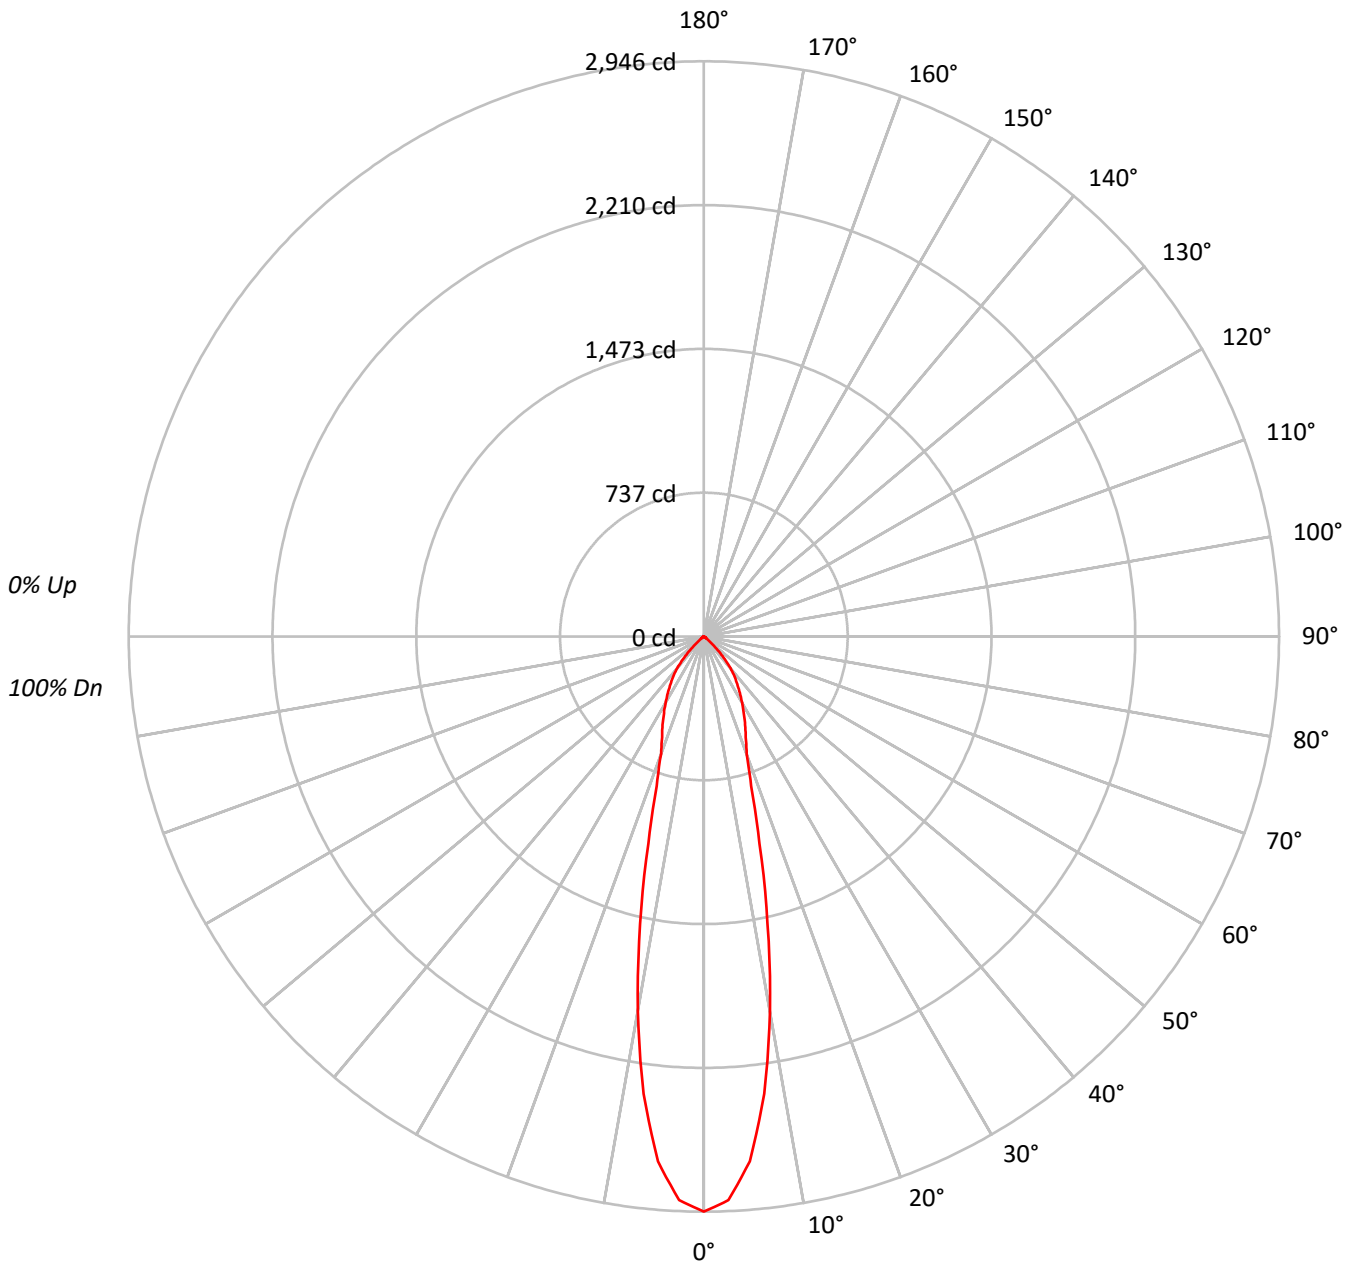



TEST NUMBER: P640986

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593TBZB - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94			
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89			
3	104	98	93	90	102	97	92	89	94	90	88	92	89	86	89	87	85	83			
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74			
6	91	82	77	73	89	82	77	73	80	76	72	79	75	72	78	74	71	70			
7	87	78	73	69	86	78	72	69	76	72	68	75	71	68	74	71	68	66			
8	83	75	69	65	82	74	69	65	73	68	65	72	68	65	71	67	64	63			
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	60			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	65	62	59	58			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	232536
5°	213796
10°	156253
15°	89735
20°	53731
25°	43542
30°	35614
35°	28718
40°	21929
45°	12303
50°	3218
55°	1652
60°	1026
65°	411
70°	254
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12303 cd/sqm



TEST NUMBER: P640986

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593TBZB - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	233.0	21.9
10°-20°	313.7	29.5
20°-30°	230.1	21.6
30°-40°	186.3	17.5
40°-50°	84.9	8.0
50°-60°	12.1	1.1
60°-70°	2.8	0.3
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	776.8	73.0
0°-40°	963.2	90.6
0°-60°	1060.2	99.7
0°-90°	1063.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1063.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2946	
5°	2698	233
15°	1098	314
25°	500	230
35°	298	186
45°	110	85
55°	12	12
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P640986

CATALOG NUMBER: ML5612LSNFL2597FS1E - 593TBZB - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2945.7
2.5°	2890.1
5°	2698.0
7.5°	2362.9
10°	1949.3
12.5°	1506.2
15°	1098.0
17.5°	803.3
20°	639.6
22.5°	558.8
25°	499.9
27.5°	443.1
30°	390.7
32.5°	342.7
35°	298.0
37.5°	257.6
40°	212.8
42.5°	158.3
45°	110.2
47.5°	61.1
50°	26.2
52.5°	16.4
55°	12.0
57.5°	9.8
60°	6.5
62.5°	4.4
65°	2.2
67.5°	1.1
70°	1.1
72.5°	1.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)