

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641030

Luminaire Tested: ML5612LSNFL2597FS1E - 594TBZB - 600LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641030
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 594TBZB - 600LM - 5000K
Description: ML56 RR, 25D TIR OPTIC, 5" TUSCON BRONZE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1058.0 lumens
Efficiency: N/A
Efficacy: 102.7 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.43
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641030

CATALOG NUMBER: ML5612LSNFL2597FS1E - 594TBZB - 600LM - 5000K

Luminous Intensity Polar Plot

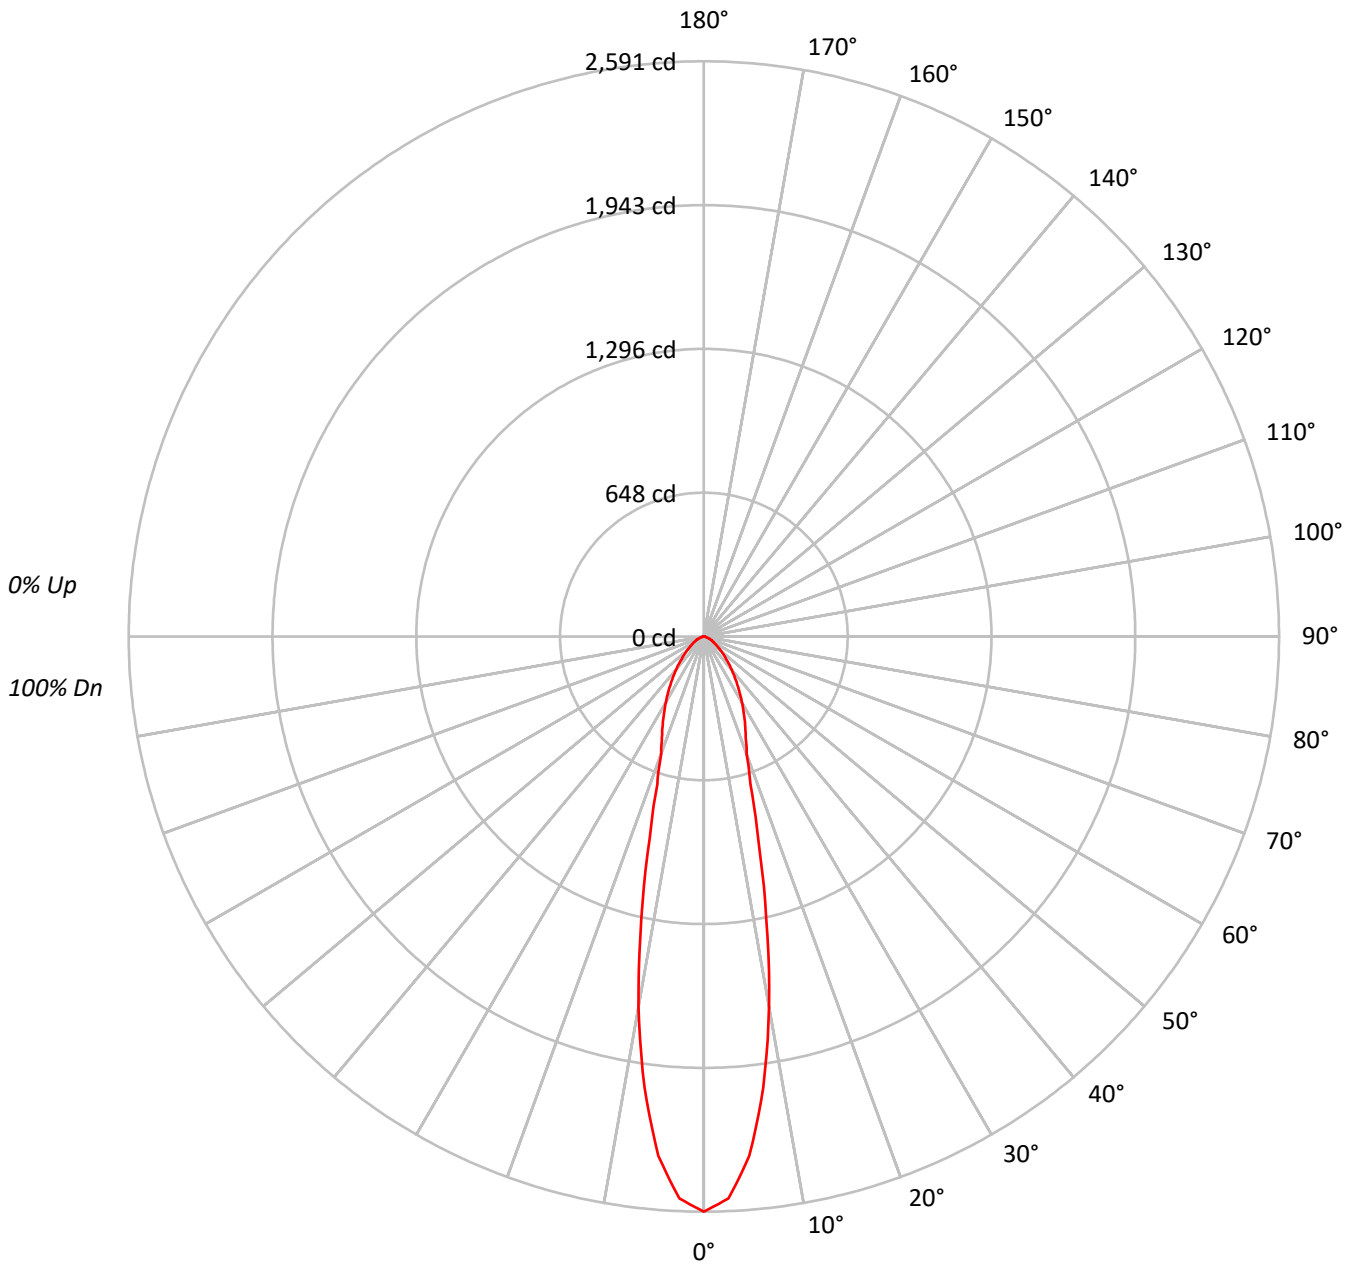



TEST NUMBER: P641030

CATALOG NUMBER: ML5612LSNFL2597FS1E - 594TBZB - 600LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92			
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85			
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	78			
4	96	88	82	77	94	87	81	77	84	80	76	82	78	75	81	77	74	73			
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68			
6	86	77	71	67	85	76	71	66	75	70	66	73	69	65	72	68	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	66	60	56	74	65	59	56	64	59	55	63	59	55	62	58	55	54			
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	204544
5°	186101
10°	135781
15°	77043
20°	47355
25°	38229
30°	31202
35°	25152
40°	19930
45°	15652
50°	12232
55°	9579
60°	7626
65°	6314
70°	4455
75°	2349
80°	1773
85°	906

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 15652 cd/sqm



TEST NUMBER: P641030

CATALOG NUMBER: ML5612LSNFL2597FS1E - 594TBZB - 600LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	202.8	19.2
10°-20°	271.6	25.7
20°-30°	202.4	19.1
30°-40°	163.8	15.5
40°-50°	109.5	10.4
50°-60°	63.4	6.0
60°-70°	33.4	3.2
70°-80°	9.6	0.9
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	676.8	64.0
0°-40°	840.7	79.5
0°-60°	1013.6	95.8
0°-90°	1058.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1058.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2591	
5°	2348	203
15°	943	272
25°	439	202
35°	261	164
45°	140	110
55°	70	63
65°	34	33
75°	8	10
85°	1	1
90°	0	



TEST NUMBER: P641030

CATALOG NUMBER: ML5612LSNFL2597FS1E - 594TBZB - 600LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2591.1
2.5°	2534.1
5°	2348.5
7.5°	2049.7
10°	1693.9
12.5°	1298.5
15°	942.7
17.5°	699.0
20°	563.7
22.5°	493.1
25°	438.9
27.5°	389.6
30°	342.3
32.5°	300.7
35°	261.0
37.5°	225.3
40°	193.4
42.5°	165.3
45°	140.2
47.5°	118.9
50°	99.6
52.5°	83.1
55°	69.6
57.5°	58.0
60°	48.3
62.5°	40.6
65°	33.8
67.5°	27.1
70°	19.3
72.5°	12.6
75°	7.7
77.5°	4.8
80°	3.9
82.5°	1.9
85°	1.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)