

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641054

Luminaire Tested: ML5612LSNFL2597FS1E - 596WB - 1200LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641054
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-12)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 596WB - 1200LM - 4000K
Description: ML56 RR, 25D TIR OPTIC, 5" SHALLOW WHITE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1617.0 lumens
Efficiency: N/A
Efficacy: 98.0 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.44
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641054

CATALOG NUMBER: ML5612LSNFL2597FS1E - 596WB - 1200LM - 4000K

Luminous Intensity Polar Plot

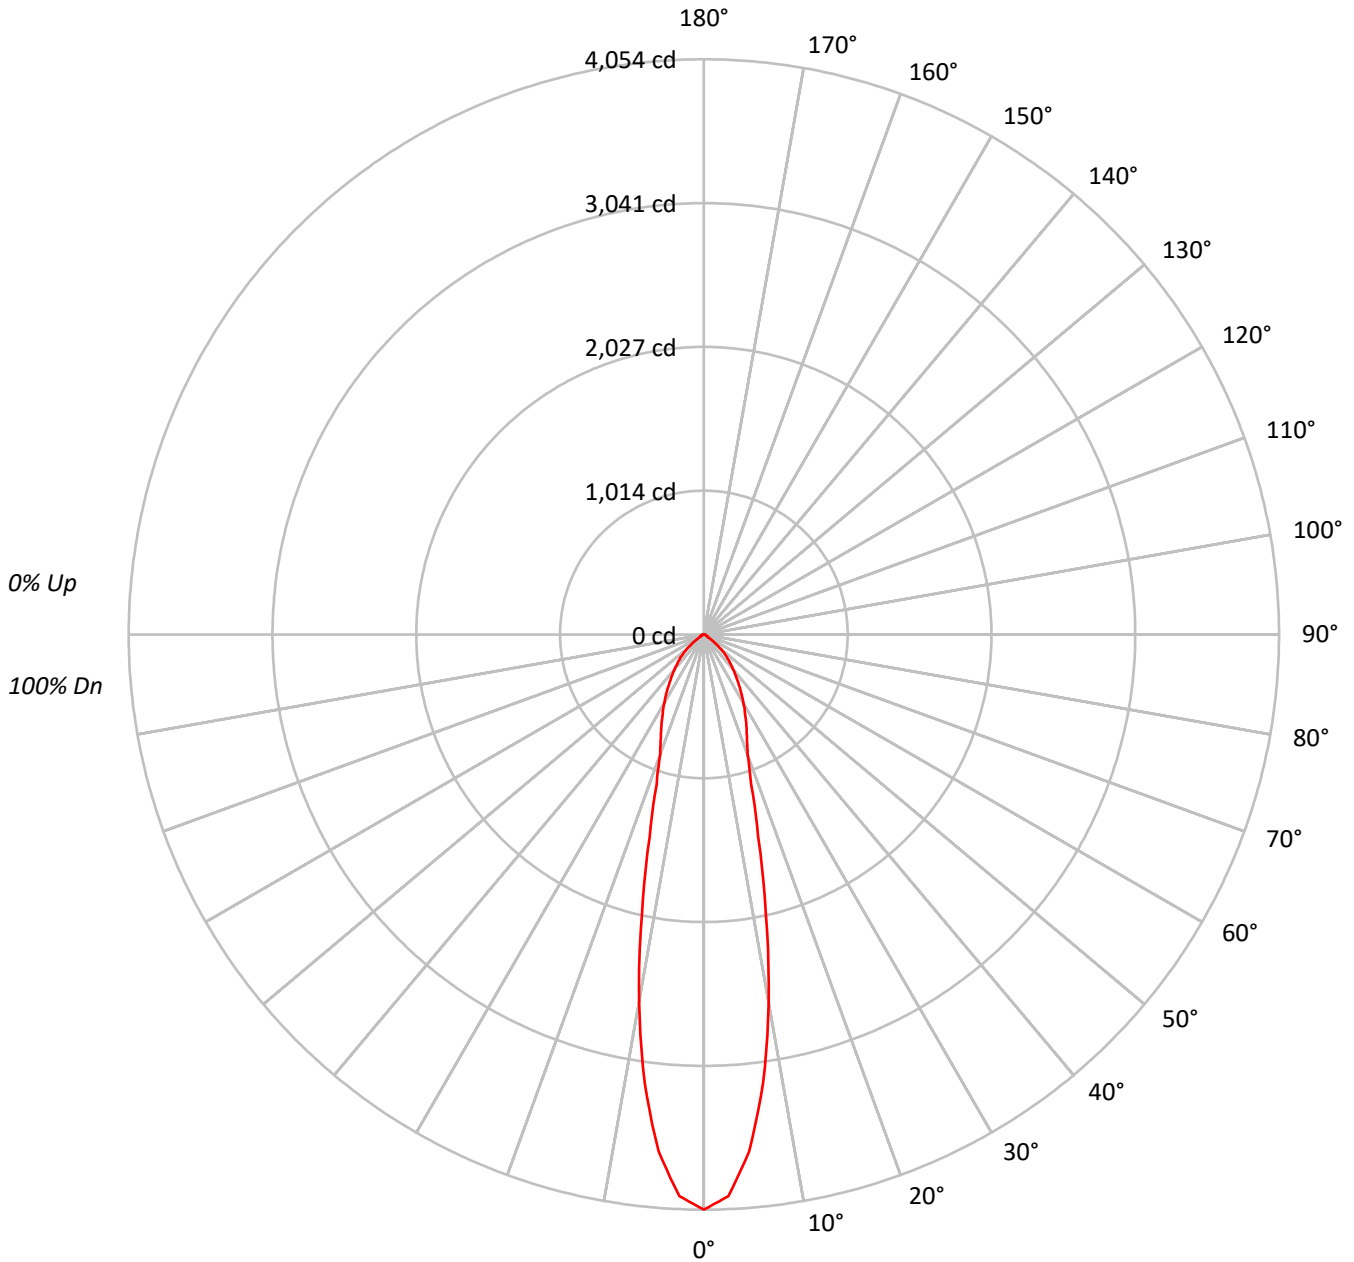



TEST NUMBER: P641054

CATALOG NUMBER: ML5612LSNFL2597FS1E - 596WB - 1200LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	75																			
5	92	84	78	73	90	83	77	73	81	76	72	79	75	72	78	74	71	70																			
6	88	79	73	69	86	78	72	68	76	72	68	75	71	67	74	70	67	65																			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62																			
8	80	71	65	61	79	70	64	60	69	64	60	68	63	60	67	63	60	58																			
9	76	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	63	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	319987
5°	289790
10°	211042
15°	120897
20°	75573
25°	61746
30°	50927
35°	41246
40°	33120
45°	26325
50°	17709
55°	8065
60°	4500
65°	4203
70°	3462
75°	3203
80°	3410
85°	4076

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 26325 cd/sqm



TEST NUMBER: P641054

CATALOG NUMBER: ML5612LSNFL2597FS1E - 596WB - 1200LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	316.0	19.5
10°-20°	425.9	26.3
20°-30°	326.3	20.2
30°-40°	268.8	16.6
40°-50°	179.9	11.1
50°-60°	62.4	3.9
60°-70°	21.7	1.3
70°-80°	11.7	0.7
80°-90°	4.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1068.2	66.1
0°-40°	1337.0	82.7
0°-60°	1579.4	97.7
0°-90°	1617.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1617.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4054	
5°	3657	316
15°	1479	426
25°	709	326
35°	428	269
45°	236	180
55°	59	62
65°	22	22
75°	10	12
85°	4	4
90°	0	



TEST NUMBER: P641054

CATALOG NUMBER: ML5612LSNFL2597FS1E - 596WB - 1200LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	4053.5
2.5°	3961.9
5°	3657.0
7.5°	3194.5
10°	2632.8
12.5°	2018.5
15°	1479.3
17.5°	1106.9
20°	899.6
22.5°	791.5
25°	708.9
27.5°	629.3
30°	558.7
32.5°	491.1
35°	428.0
37.5°	371.0
40°	321.4
42.5°	276.3
45°	235.8
47.5°	193.7
50°	144.2
52.5°	102.1
55°	58.6
57.5°	36.0
60°	28.5
62.5°	25.5
65°	22.5
67.5°	18.0
70°	15.0
72.5°	12.0
75°	10.5
77.5°	10.5
80°	7.5
82.5°	6.0
85°	4.5
87.5°	1.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)