

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641065

Luminaire Tested: ML5612LSNFL2597FS1E - 596WB - 900LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641065
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-12)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 596WB - 900LM - 5000K
Description: ML56 RR, 25D TIR OPTIC, 5" SHALLOW WHITE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1336.3 lumens
Efficiency: N/A
Efficacy: 100.5 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.44
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641065
CATALOG NUMBER: ML5612LSNFL2597FS1E - 596WB - 900LM - 5000K

Luminous Intensity Polar Plot

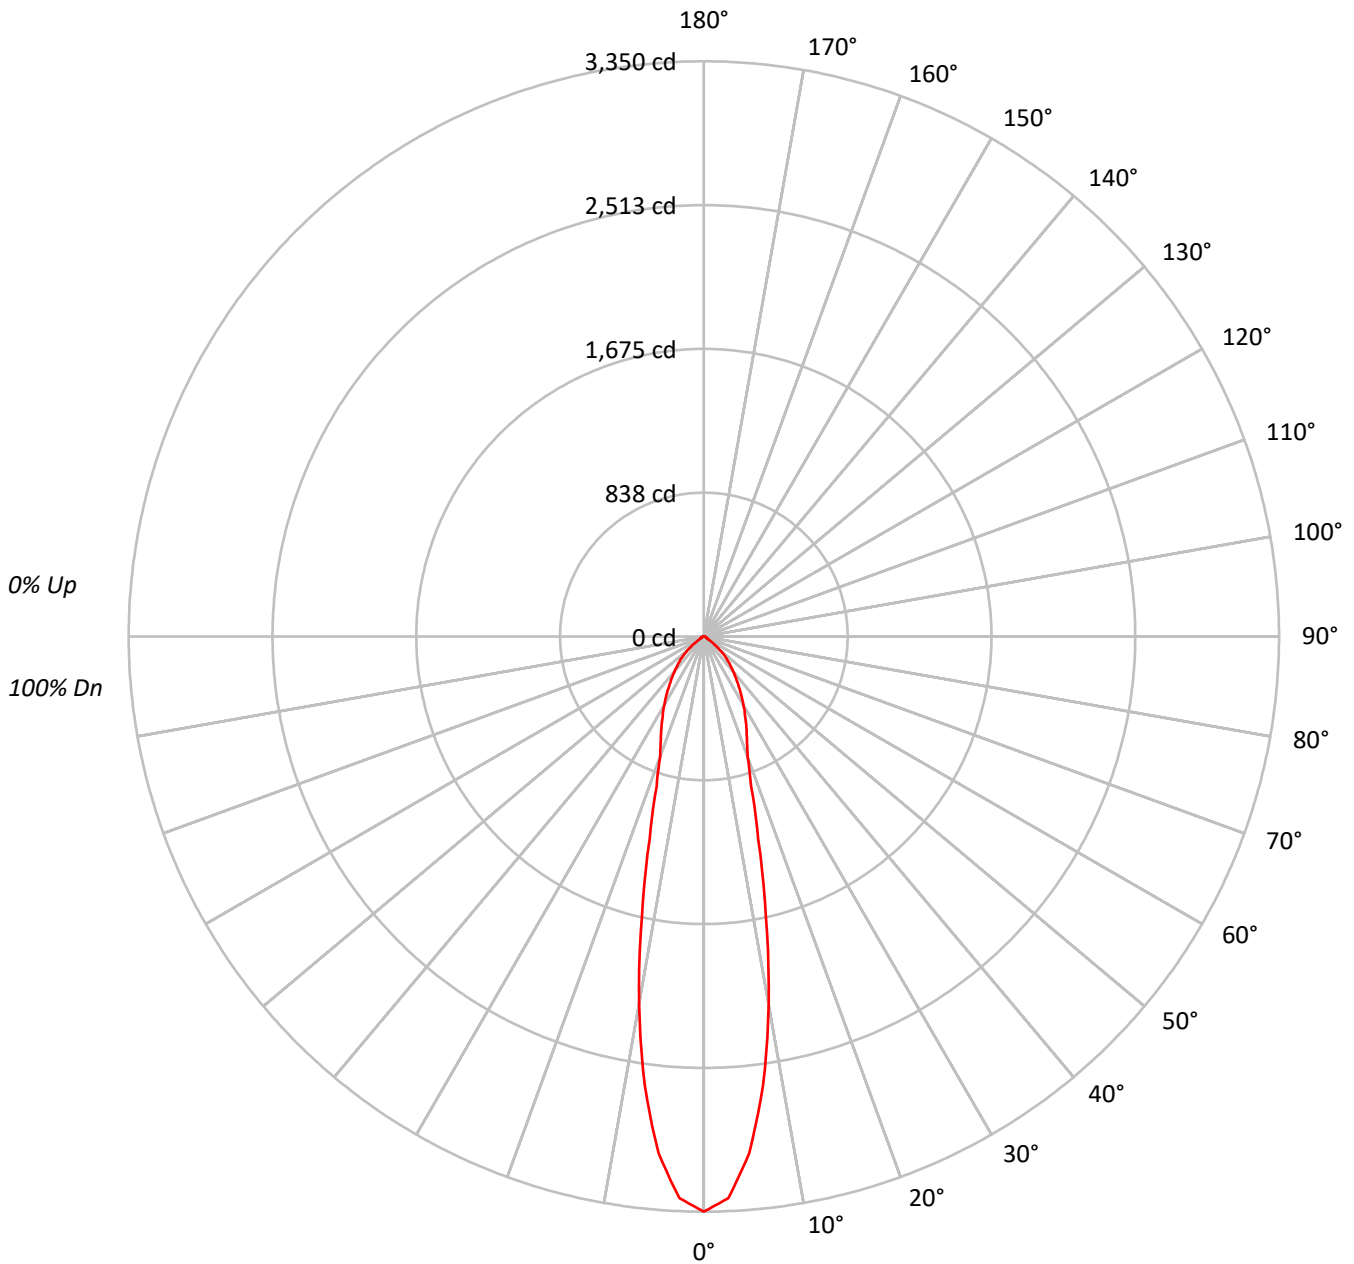



TEST NUMBER: P641065

CATALOG NUMBER: ML5612LSNFL2597FS1E - 596WB - 900LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	73	90	83	77	73	81	76	72	79	75	72	78	74	71	70	70	70	70
6	88	79	73	69	86	78	72	68	76	71	68	75	71	67	74	70	67	65	65	65	65
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62	62	62	62
8	80	71	65	61	79	70	64	60	69	64	60	68	63	60	67	63	60	58	58	58	58
9	76	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55	55	55	55
10	73	64	58	54	72	63	58	54	63	58	54	62	57	54	61	57	54	53	53	53	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	264436
5°	239479
10°	174401
15°	99910
20°	62451
25°	51024
30°	42085
35°	34086
40°	27370
45°	21759
50°	14627
55°	6661
60°	3726
65°	3474
70°	2862
75°	2654
80°	2819
85°	3351

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 21759 cd/sqm



TEST NUMBER: P641065

CATALOG NUMBER: ML5612LSNFL2597FS1E - 596WB - 900LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	261.1	19.5
10°-20°	352.0	26.3
20°-30°	269.6	20.2
30°-40°	222.1	16.6
40°-50°	148.7	11.1
50°-60°	51.6	3.9
60°-70°	17.9	1.3
70°-80°	9.7	0.7
80°-90°	3.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	882.8	66.1
0°-40°	1104.9	82.7
0°-60°	1305.2	97.7
0°-90°	1336.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1336.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3350	
5°	3022	261
15°	1222	352
25°	586	270
35°	354	222
45°	195	149
55°	48	52
65°	19	18
75°	9	10
85°	4	4
90°	0	



TEST NUMBER: P641065

CATALOG NUMBER: ML5612LSNFL2597FS1E - 596WB - 900LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3349.8
2.5°	3274.0
5°	3022.1
7.5°	2639.8
10°	2175.7
12.5°	1668.0
15°	1222.5
17.5°	914.7
20°	743.4
22.5°	654.1
25°	585.8
27.5°	520.0
30°	461.7
32.5°	405.8
35°	353.7
37.5°	306.6
40°	265.6
42.5°	228.4
45°	194.9
47.5°	160.1
50°	119.1
52.5°	84.4
55°	48.4
57.5°	29.8
60°	23.6
62.5°	21.1
65°	18.6
67.5°	14.9
70°	12.4
72.5°	9.9
75°	8.7
77.5°	8.7
80°	6.2
82.5°	5.0
85°	3.7
87.5°	1.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)