

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641068

Luminaire Tested: ML5612LSNFL2597FS1E - 691WB - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641068
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-13)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 691WB - 1200LM - 3500K
Description: ML56 RR, 25D TIR OPTIC, 6" DEADFRONT TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1514.1 lumens
Efficiency: N/A
Efficacy: 91.8 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641068
CATALOG NUMBER: ML5612LSNFL2597FS1E - 691WB - 1200LM - 3500K

Luminous Intensity Polar Plot

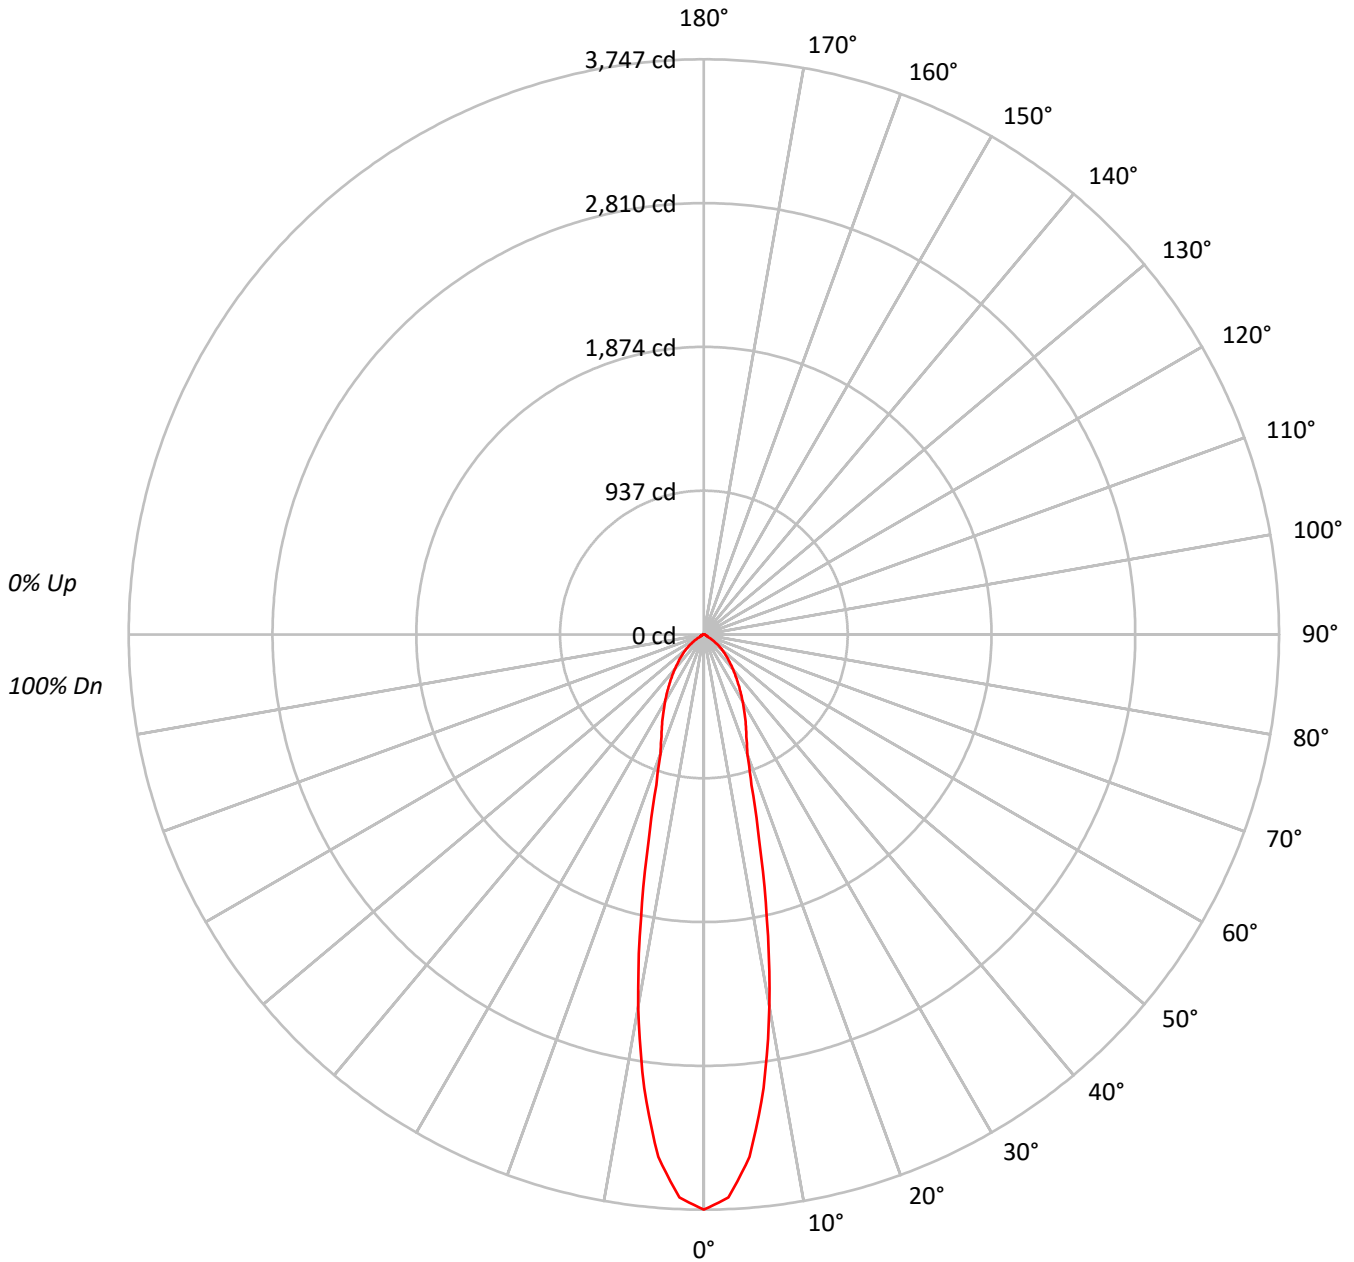



TEST NUMBER: P641068

CATALOG NUMBER: ML5612LSNFL2597FS1E - 691WB - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	91	94	92	90	92	89	88	86																			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80																			
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74																			
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69																			
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	69	66	65																			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61																			
8	80	70	64	60	78	70	64	60	68	63	60	67	63	59	66	62	59	58																			
9	76	67	61	57	75	66	61	57	65	60	57	64	60	56	63	59	56	55																			
10	73	63	58	54	72	63	58	54	62	57	54	61	57	54	61	57	53	52																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	205389
5°	187976
10°	136938
15°	78718
20°	48193
25°	38996
30°	31973
35°	26053
40°	20968
45°	16769
50°	13211
55°	8535
60°	3366
65°	2529
70°	2020
75°	1779
80°	1768
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16769 cd/sqm



TEST NUMBER: P641068

CATALOG NUMBER: ML5612LSNFL2597FS1E - 691WB - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	294.6	19.5
10°-20°	397.7	26.3
20°-30°	297.1	19.6
30°-40°	244.2	16.1
40°-50°	168.4	11.1
50°-60°	80.7	5.3
60°-70°	19.4	1.3
70°-80°	9.0	0.6
80°-90°	3.0	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	989.3	65.3
0°-40°	1233.5	81.5
0°-60°	1482.6	97.9
0°-90°	1514.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1514.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3747	
5°	3416	295
15°	1387	398
25°	645	297
35°	389	244
45°	216	168
55°	89	81
65°	20	19
75°	8	9
85°	3	3
90°	0	



TEST NUMBER: P641068

CATALOG NUMBER: ML5612LSNFL2597FS1E - 691WB - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3746.6
2.5°	3671.2
5°	3415.9
7.5°	2979.1
10°	2460.0
12.5°	1896.3
15°	1387.0
17.5°	1027.0
20°	826.1
22.5°	721.4
25°	644.7
27.5°	572.1
30°	505.1
32.5°	443.7
35°	389.3
37.5°	339.1
40°	293.0
42.5°	252.6
45°	216.3
47.5°	184.2
50°	154.9
52.5°	125.6
55°	89.3
57.5°	57.2
60°	30.7
62.5°	22.3
65°	19.5
67.5°	15.3
70°	12.6
72.5°	9.8
75°	8.4
77.5°	7.0
80°	5.6
82.5°	4.2
85°	2.8
87.5°	1.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)