

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641090

Luminaire Tested: ML5612LSNFL2597FS1E - 692H - 600LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641090
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-15)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 692H - 600LM - 5000K
Description: ML56 RR, 25D TIR OPTIC, 6" HAZE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1026.1 lumens
Efficiency: N/A
Efficacy: 99.6 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641090
CATALOG NUMBER: ML5612LSNFL2597FS1E - 692H - 600LM - 5000K

Luminous Intensity Polar Plot

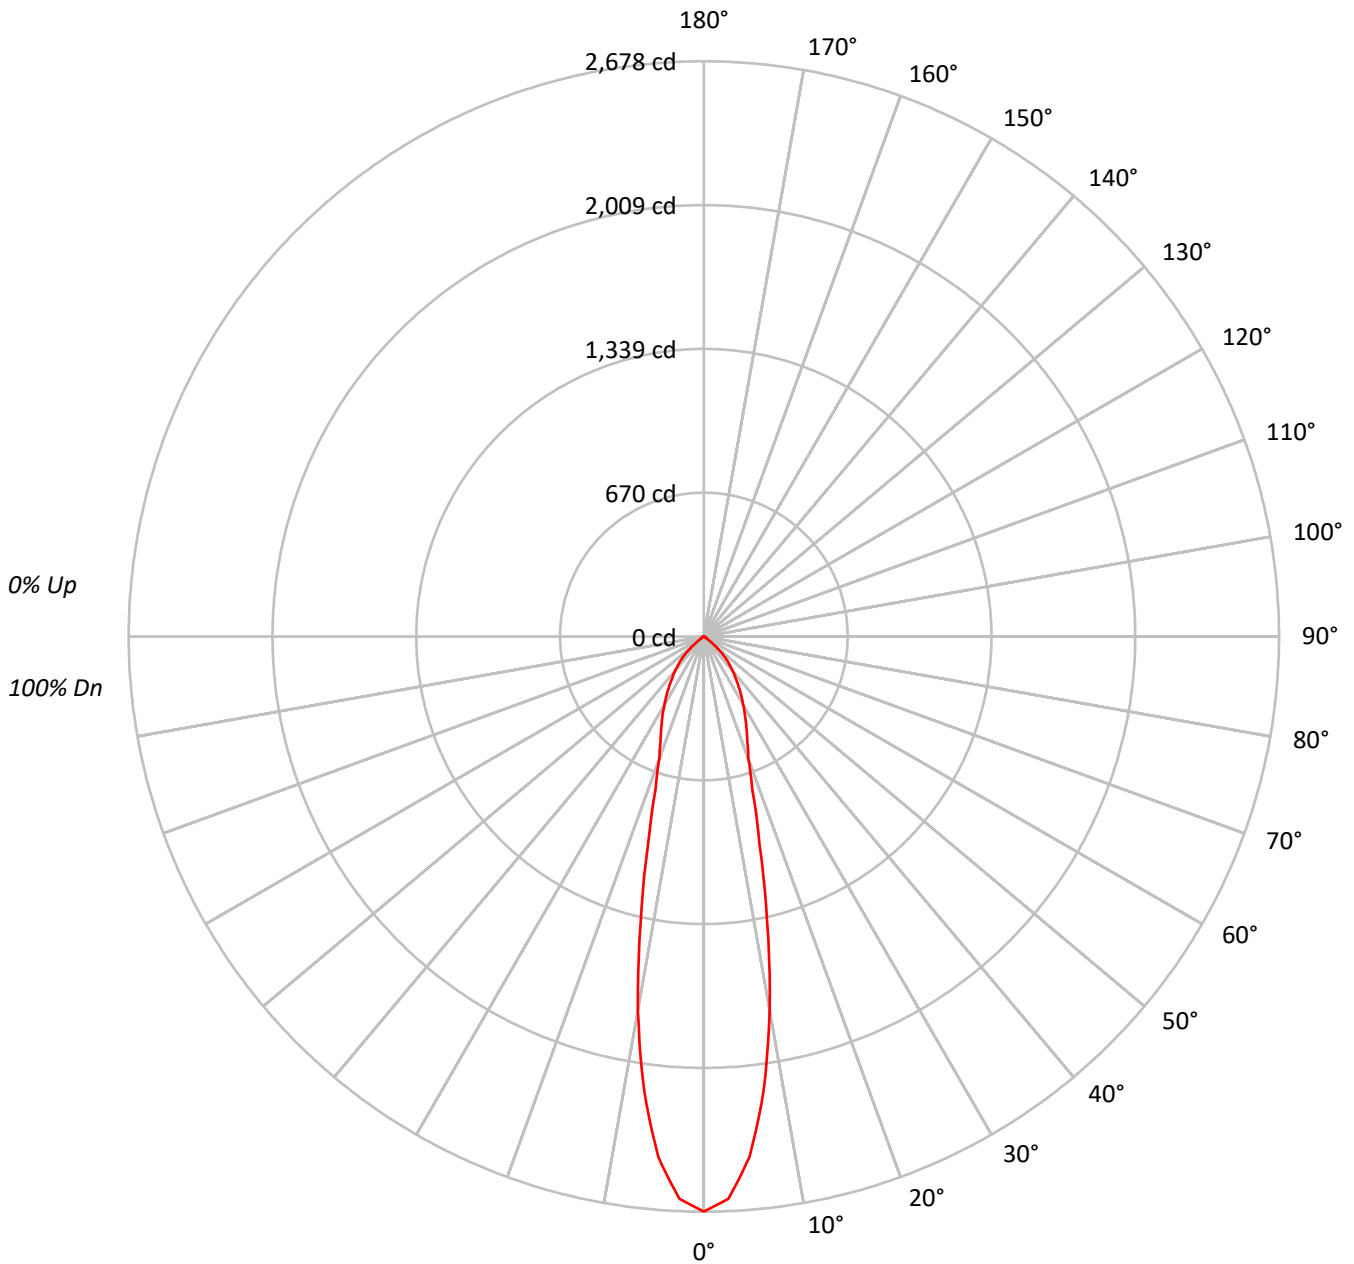



TEST NUMBER: P641090

CATALOG NUMBER: ML5612LSNFL2597FS1E - 692H - 600LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	96	91	88	93	89	86	91	87	85	88	86	84	82			
4	98	91	86	82	96	90	85	81	88	83	80	86	82	79	84	81	78	77			
5	94	86	80	76	92	85	79	76	83	78	75	81	77	74	80	76	74	72			
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	69	68			
7	85	77	71	67	84	76	70	67	75	70	66	73	69	66	72	69	66	64			
8	82	73	67	63	81	72	67	63	71	66	63	70	66	62	69	65	62	61			
9	78	69	64	60	77	69	63	60	68	63	60	67	63	59	66	62	59	58			
10	75	66	61	57	74	66	60	57	65	60	57	64	60	57	63	59	56	55			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	146786
5°	133881
10°	98384
15°	56879
20°	35330
25°	28381
30°	23206
35°	18772
40°	14813
45°	11172
50°	5774
55°	1663
60°	1064
65°	623
70°	305
75°	212
80°	316
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11172 cd/sqm



TEST NUMBER: P641090

CATALOG NUMBER: ML5612LSNFL2597FS1E - 692H - 600LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	210.6	20.5
10°-20°	287.6	28.0
20°-30°	216.5	21.1
30°-40°	175.8	17.1
40°-50°	107.3	10.5
50°-60°	22.1	2.2
60°-70°	4.7	0.5
70°-80°	1.2	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	714.8	69.7
0°-40°	890.6	86.8
0°-60°	1020.1	99.4
0°-90°	1026.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1026.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2678	
5°	2433	211
15°	1002	288
25°	469	217
35°	280	176
45°	144	107
55°	17	22
65°	5	5
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P641090

CATALOG NUMBER: ML5612LSNFL2597FS1E - 692H - 600LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2677.6
2.5°	2620.6
5°	2432.9
7.5°	2133.0
10°	1767.4
12.5°	1361.1
15°	1002.2
17.5°	750.7
20°	605.6
22.5°	527.2
25°	469.2
27.5°	416.0
30°	366.6
32.5°	323.1
35°	280.5
37.5°	241.8
40°	207.0
42.5°	176.1
45°	144.1
47.5°	104.5
50°	67.7
52.5°	31.9
55°	17.4
57.5°	12.6
60°	9.7
62.5°	6.8
65°	4.8
67.5°	1.9
70°	1.9
72.5°	1.0
75°	1.0
77.5°	1.0
80°	1.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)