

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641107

Luminaire Tested: ML5612LSNFL2597FS1E - 692SC - 900LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641107
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-14)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 692SC - 900LM - 3000K
Description: ML56 RR, 25D TIR OPTIC, 6" SPECULAR CLEAR TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1210.8 lumens
Efficiency: N/A
Efficacy: 91.0 lumens/watt
Spacing Criteria (0/90/45): 0.37 / 0.37 / 0.39
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641107
CATALOG NUMBER: ML5612LSNFL2597FS1E - 692SC - 900LM - 3000K

Luminous Intensity Polar Plot

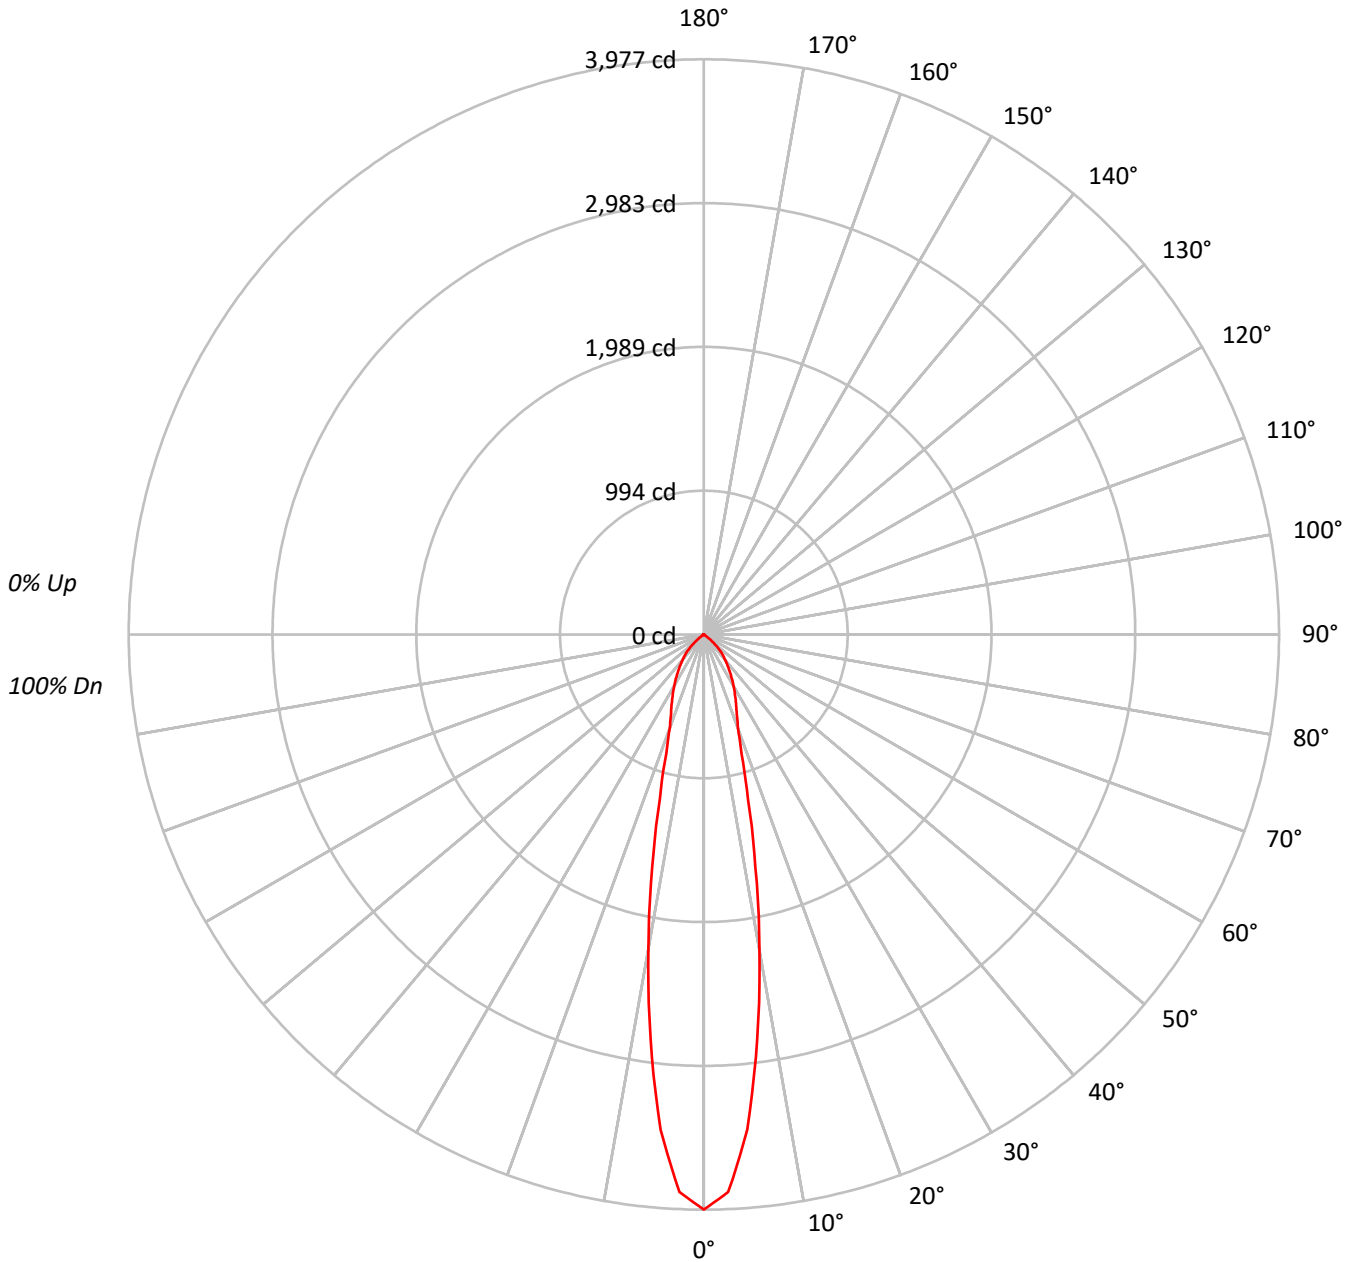



TEST NUMBER: P641107

CATALOG NUMBER: ML5612LSNFL2597FS1E - 692SC - 900LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	89			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83			
4	99	92	87	83	97	91	86	83	89	85	82	87	83	81	85	82	80	78			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74			
6	91	82	77	73	89	82	76	73	80	76	72	79	75	72	78	74	71	70			
7	87	78	73	69	85	78	72	69	76	72	68	75	71	68	74	70	68	66			
8	83	75	69	65	82	74	69	65	73	68	65	72	68	65	71	67	64	63			
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	60			
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	66	62	59	58			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	218003
5°	189115
10°	123055
15°	66777
20°	40084
25°	31780
30°	25871
35°	20739
40°	16309
45°	12443
50°	6413
55°	1501
60°	866
65°	441
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12443 cd/sqm



TEST NUMBER: P641107

CATALOG NUMBER: ML5612LSNFL2597FS1E - 692SC - 900LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	287.1	23.7
10°-20°	341.7	28.2
20°-30°	243.0	20.1
30°-40°	194.6	16.1
40°-50°	118.8	9.8
50°-60°	22.2	1.8
60°-70°	3.4	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	871.8	72.0
0°-40°	1066.5	88.1
0°-60°	1207.4	99.7
0°-90°	1210.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1210.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3977	
5°	3437	287
15°	1177	342
25°	525	243
35°	310	195
45°	160	119
55°	16	22
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641107

CATALOG NUMBER: ML5612LSNFL2597FS1E - 692SC - 900LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3976.7
2.5°	3857.7
5°	3436.6
7.5°	2821.4
10°	2210.6
12.5°	1644.8
15°	1176.6
17.5°	864.5
20°	687.1
22.5°	593.9
25°	525.4
27.5°	464.8
30°	408.7
32.5°	358.1
35°	309.9
37.5°	267.2
40°	227.9
42.5°	194.2
45°	160.5
47.5°	115.6
50°	75.2
52.5°	33.7
55°	15.7
57.5°	10.1
60°	7.9
62.5°	5.6
65°	3.4
67.5°	1.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)