

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641163

Luminaire Tested: ML5612LSNFL2597FS1E - 693TBZB - 600LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641163
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 693TBZB - 600LM - 3500K
Description: ML56 RR, 25D TIR OPTIC, 6" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 908.4 lumens
Efficiency: N/A
Efficacy: 88.2 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641163
CATALOG NUMBER: ML5612LSNFL2597FS1E - 693TBZB - 600LM - 3500K

Luminous Intensity Polar Plot

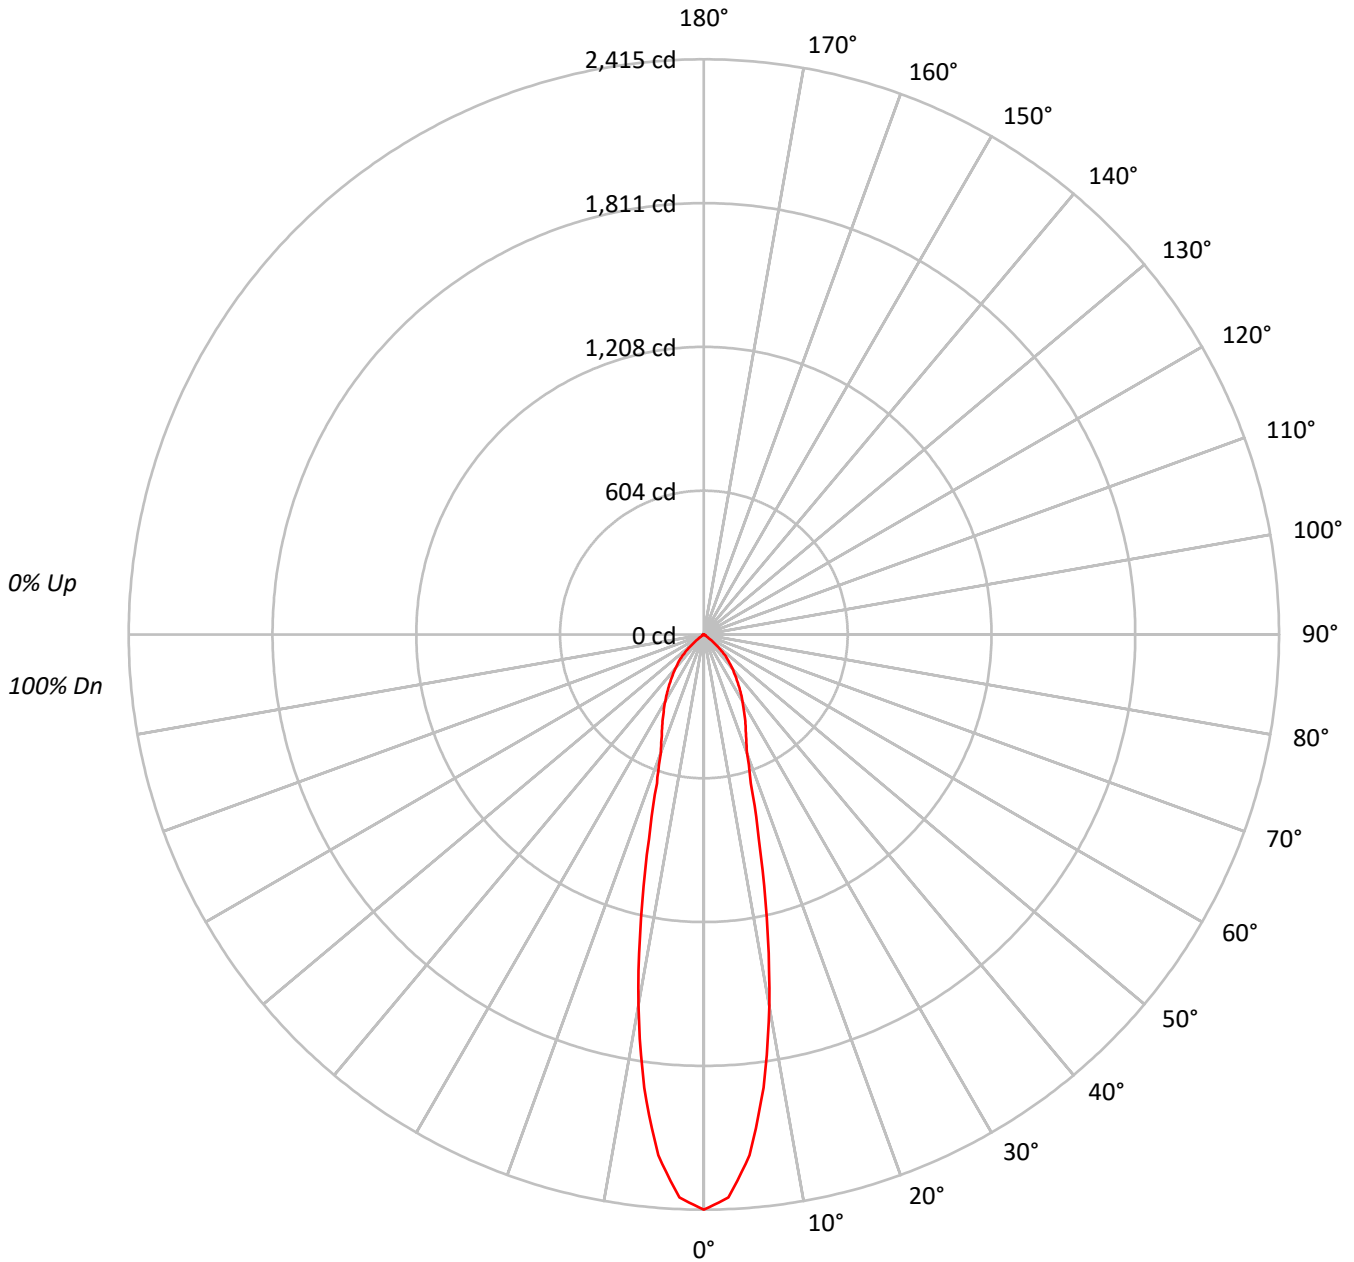



TEST NUMBER: P641163

CATALOG NUMBER: ML5612LSNFL2597FS1E - 693TBZB - 600LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	108	104	100	97	106	102	99	96	99	96	93	96	94	91	93	91	90	88			
3	103	97	92	89	101	96	91	88	93	89	86	91	88	85	88	86	84	82			
4	98	91	86	82	97	90	85	81	88	84	80	86	82	79	84	81	79	77			
5	94	86	80	76	92	85	80	76	83	79	75	82	78	75	80	77	74	72			
6	90	81	75	71	88	80	75	71	79	74	71	77	73	70	76	73	70	68			
7	86	77	71	67	84	76	71	67	75	70	67	74	69	66	73	69	66	65			
8	82	73	67	63	81	72	67	63	71	66	63	70	66	63	69	65	63	61			
9	78	69	64	60	77	69	64	60	68	63	60	67	63	60	66	62	59	58			
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	64	60	57	56			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	132385
5°	120773
10°	88152
15°	50449
20°	30779
25°	24951
30°	20535
35°	16664
40°	13182
45°	10102
50°	5134
55°	1290
60°	789
65°	350
70°	144
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10102 cd/sqm



TEST NUMBER: P641163

CATALOG NUMBER: ML5612LSNFL2597FS1E - 693TBZB - 600LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	189.6	20.9
10°-20°	255.0	28.1
20°-30°	190.0	20.9
30°-40°	156.1	17.2
40°-50°	96.1	10.6
50°-60°	18.3	2.0
60°-70°	3.0	0.3
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	634.6	69.9
0°-40°	790.7	87.0
0°-60°	905.1	99.6
0°-90°	908.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	908.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2415	
5°	2195	190
15°	889	255
25°	412	190
35°	249	156
45°	130	96
55°	14	18
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641163

CATALOG NUMBER: ML5612LSNFL2597FS1E - 693TBZB - 600LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2414.9
2.5°	2366.4
5°	2194.7
7.5°	1919.7
10°	1583.6
12.5°	1217.8
15°	888.9
17.5°	656.1
20°	527.6
22.5°	461.1
25°	412.5
27.5°	365.8
30°	324.4
32.5°	285.8
35°	249.0
37.5°	215.7
40°	184.2
42.5°	157.3
45°	130.3
47.5°	93.5
50°	60.2
52.5°	27.0
55°	13.5
57.5°	9.0
60°	7.2
62.5°	4.5
65°	2.7
67.5°	0.9
70°	0.9
72.5°	0.9
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)