

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641176

Luminaire Tested: ML5612LSNFL2597FS1E - 693WB - 600LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641176
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-17)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 693WB - 600LM - 2700K
Description: ML56 RR, 25D TIR OPTIC, 6" WHITE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 907.5 lumens
Efficiency: N/A
Efficacy: 88.1 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641176
CATALOG NUMBER: ML5612LSNFL2597FS1E - 693WB - 600LM - 2700K

Luminous Intensity Polar Plot

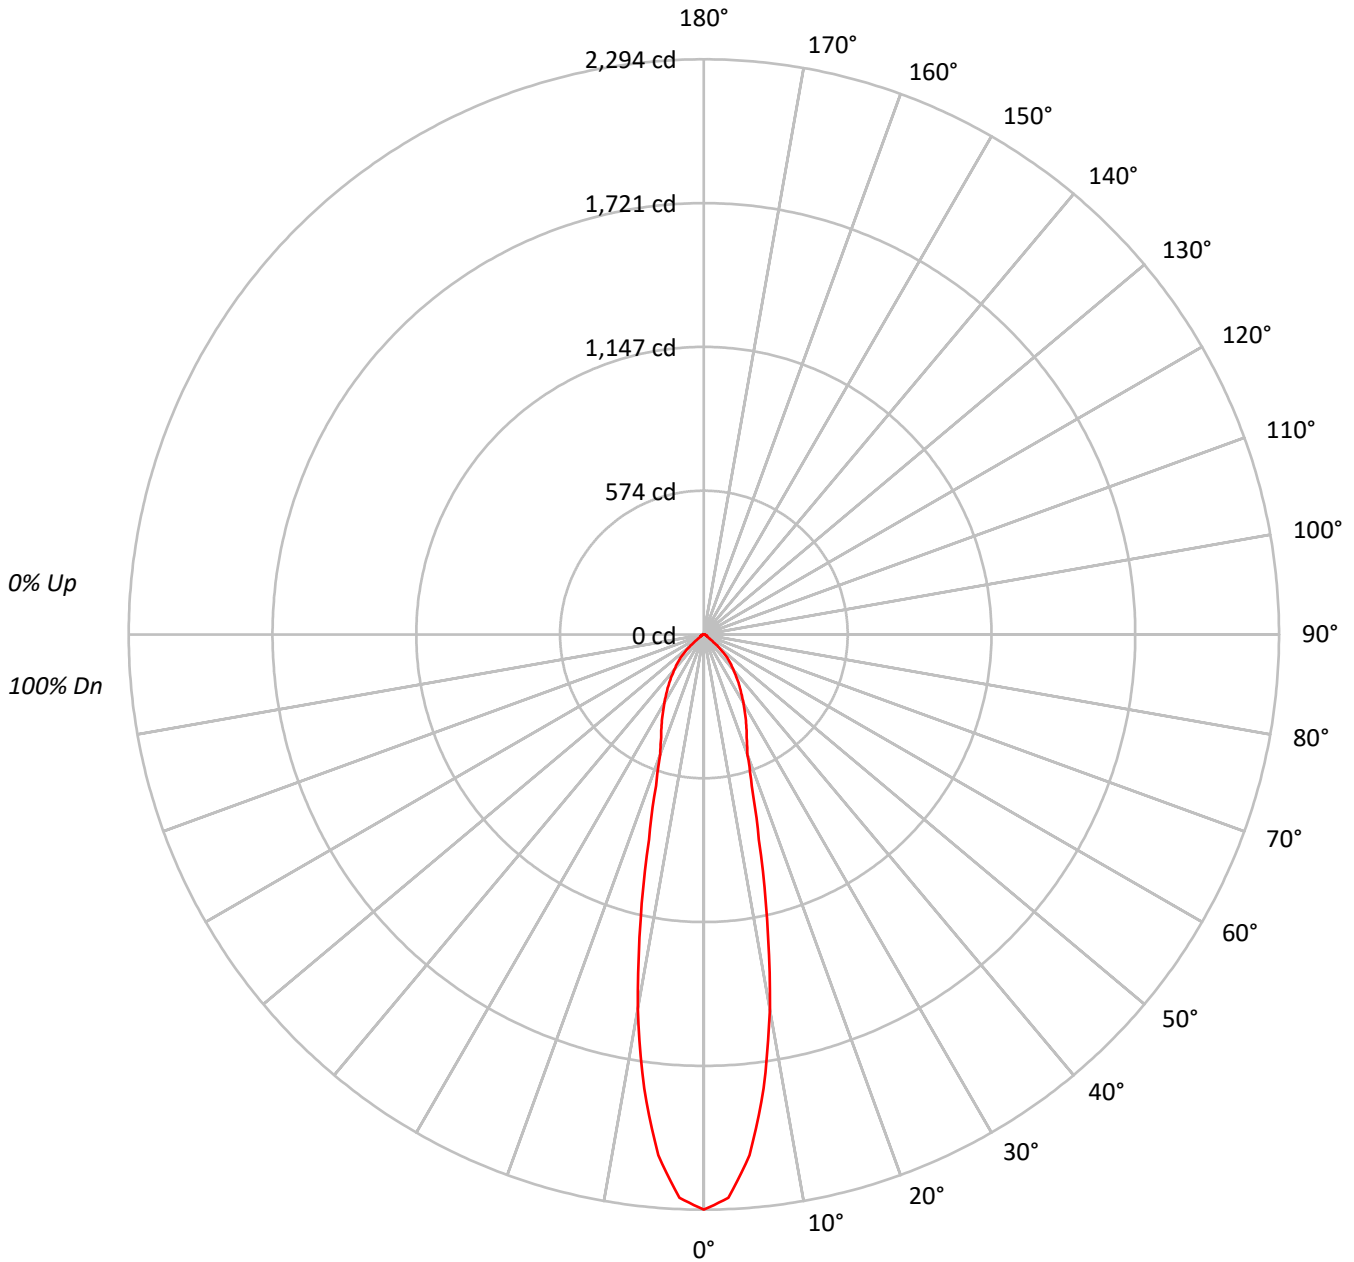



TEST NUMBER: P641176

CATALOG NUMBER: ML5612LSNFL2597FS1E - 693WB - 600LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	77	82	79	77	75			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	71	68	66			
7	84	75	69	65	83	74	69	65	73	68	64	72	67	64	71	67	64	62			
8	80	71	65	61	79	71	65	61	69	64	61	68	64	61	68	63	60	59			
9	77	68	62	58	76	67	62	58	66	61	58	65	61	58	65	60	57	56			
10	74	65	59	55	73	64	59	55	63	58	55	63	58	55	62	58	55	53			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	125741
5°	114759
10°	84367
15°	48076
20°	29618
25°	24177
30°	19921
35°	16336
40°	13089
45°	10288
50°	5876
55°	2112
60°	1776
65°	1544
70°	1362
75°	1440
80°	1610
85°	1635

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10288 cd/sqm



TEST NUMBER: P641176

CATALOG NUMBER: ML5612LSNFL2597FS1E - 693WB - 600LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	180.5	19.9
10°-20°	244.3	26.9
20°-30°	184.0	20.3
30°-40°	152.7	16.8
40°-50°	98.4	10.8
50°-60°	26.1	2.9
60°-70°	11.7	1.3
70°-80°	7.2	0.8
80°-90°	2.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	608.7	67.1
0°-40°	761.5	83.9
0°-60°	886.0	97.6
0°-90°	907.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	907.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2294	
5°	2085	180
15°	847	244
25°	400	184
35°	244	153
45°	133	98
55°	22	26
65°	12	12
75°	7	7
85°	3	3
90°	0	



TEST NUMBER: P641176

CATALOG NUMBER: ML5612LSNFL2597FS1E - 693WB - 600LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2293.7
2.5°	2248.7
5°	2085.4
7.5°	1826.0
10°	1515.6
12.5°	1164.3
15°	847.1
17.5°	633.6
20°	507.7
22.5°	445.7
25°	399.7
27.5°	355.5
30°	314.7
32.5°	278.1
35°	244.1
37.5°	211.8
40°	182.9
42.5°	157.3
45°	132.7
47.5°	98.7
50°	68.9
52.5°	35.7
55°	22.1
57.5°	17.9
60°	16.2
62.5°	13.6
65°	11.9
67.5°	9.4
70°	8.5
72.5°	7.7
75°	6.8
77.5°	6.0
80°	5.1
82.5°	3.4
85°	2.6
87.5°	0.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)