

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641227

Luminaire Tested: ML5612LSNFL2597FS1E - 696WB - 900LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641227
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-23)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSNFL2597FS1E - 696WB - 900LM - 3000K
Description: ML56 RR, 25D TIR OPTIC, 6" SHALLOW WHITE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1219.8 lumens
Efficiency: N/A
Efficacy: 91.7 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641227
CATALOG NUMBER: ML5612LSNFL2597FS1E - 696WB - 900LM - 3000K

Luminous Intensity Polar Plot

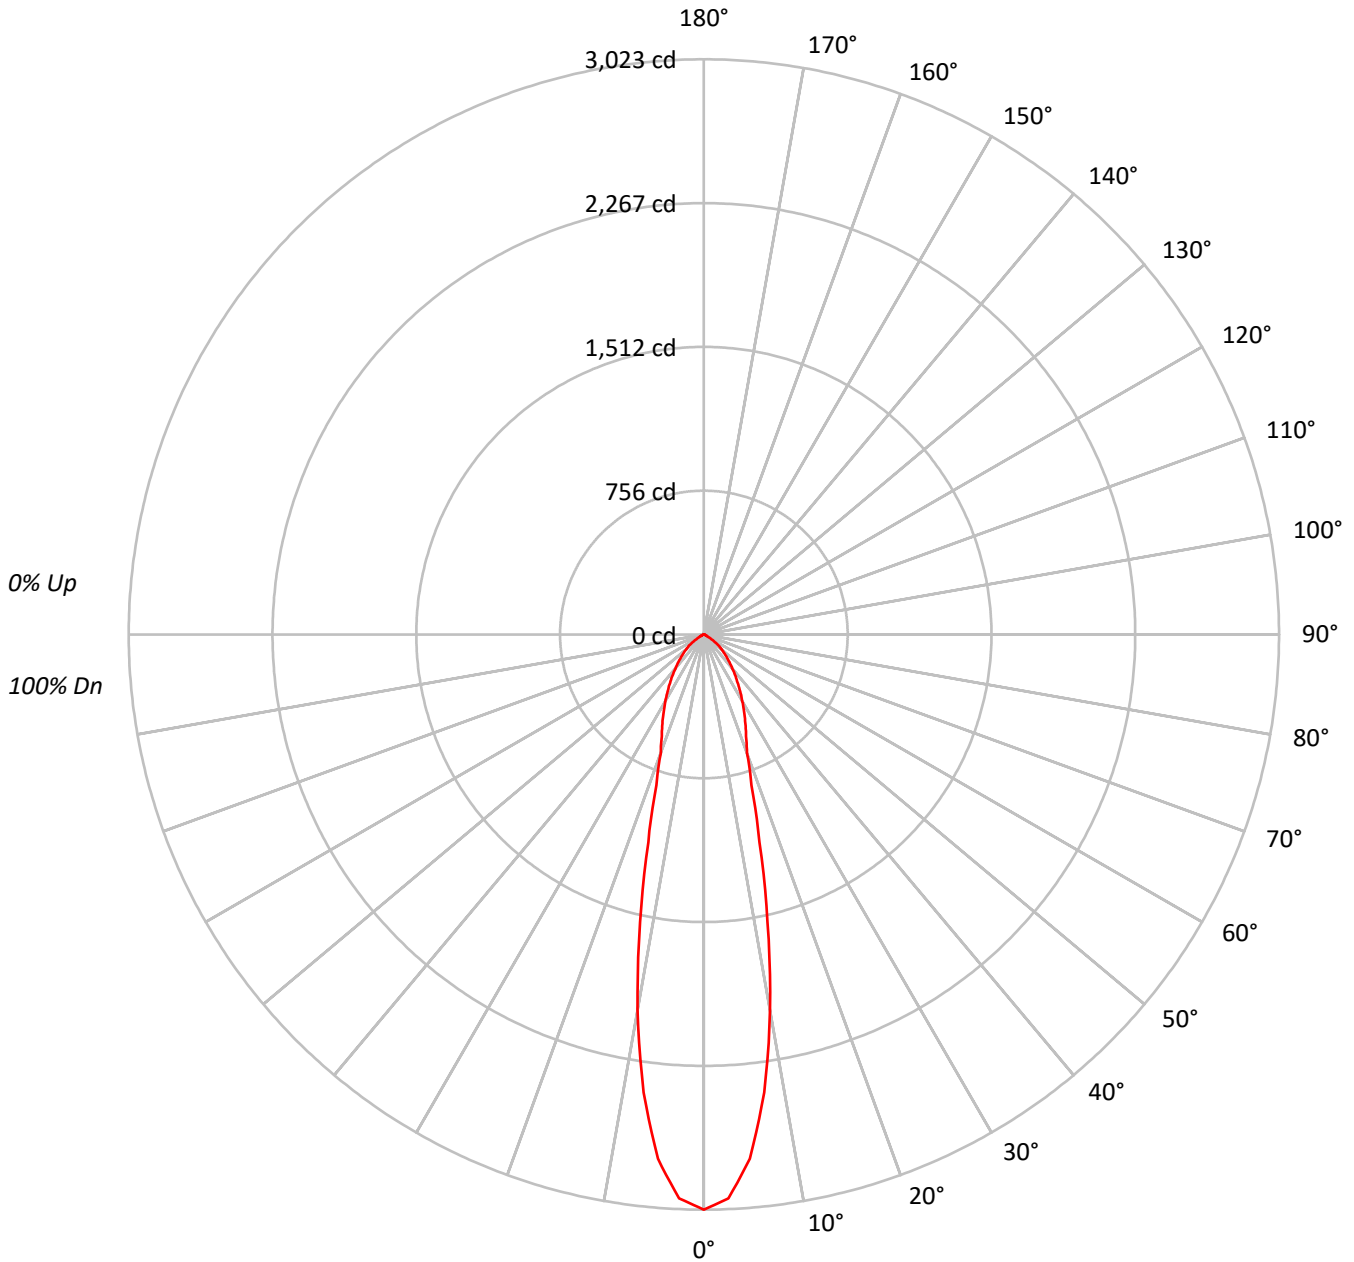



TEST NUMBER: P641227

CATALOG NUMBER: ML5612LSNFL2597FS1E - 696WB - 900LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	106	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80	80	80	80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	78	76	74	74	74	74
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69	69	69	69
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	70	67	65	65	65	65
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61	61	61	61
8	80	70	64	60	78	70	64	60	69	63	60	68	63	60	67	62	59	58	58	58	58
9	76	67	61	57	75	66	61	57	65	60	57	64	60	57	64	59	56	55	55	55	55
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52	52	52	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	165738
5°	152234
10°	111593
15°	64115
20°	38678
25°	31211
30°	25567
35°	20719
40°	16617
45°	13218
50°	10430
55°	7292
60°	3201
65°	1894
70°	1443
75°	1186
80°	1073
85°	1384

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13218 cd/sqm



TEST NUMBER: P641227

CATALOG NUMBER: ML5612LSNFL2597FS1E - 696WB - 900LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	239.2	19.6
10°-20°	323.2	26.5
20°-30°	238.0	19.5
30°-40°	194.4	15.9
40°-50°	132.8	10.9
50°-60°	67.8	5.6
60°-70°	16.0	1.3
70°-80°	6.1	0.5
80°-90°	2.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	800.4	65.6
0°-40°	994.8	81.6
0°-60°	1195.4	98.0
0°-90°	1219.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1219.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3023	
5°	2766	239
15°	1130	323
25°	516	238
35°	310	194
45°	170	133
55°	76	68
65°	15	16
75°	6	6
85°	2	2
90°	0	



TEST NUMBER: P641227

CATALOG NUMBER: ML5612LSNFL2597FS1E - 696WB - 900LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3023.3
2.5°	2966.1
5°	2766.4
7.5°	2427.6
10°	2004.7
12.5°	1547.0
15°	1129.7
17.5°	831.3
20°	663.0
22.5°	578.9
25°	516.0
27.5°	457.7
30°	403.9
32.5°	354.5
35°	309.6
37.5°	269.2
40°	232.2
42.5°	199.7
45°	170.5
47.5°	144.7
50°	122.3
52.5°	102.1
55°	76.3
57.5°	51.6
60°	29.2
62.5°	19.1
65°	14.6
67.5°	12.3
70°	9.0
72.5°	6.7
75°	5.6
77.5°	4.5
80°	3.4
82.5°	3.4
85°	2.2
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)