

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641246

Luminaire Tested: ML5612LSVWFL7597FS1E - 592H - 1200LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P641246  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-72)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSVWFL7597FS1E - 592H - 1200LM - 2700K  
Description: ML56 RR, 75D TIR OPTIC, 5" HAZE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1426.4 lumens  
Efficiency: N/A  
Efficacy: 86.4 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.07  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct


Input Watts (W): 16.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P641246

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 1200LM - 2700K

### Luminous Intensity Polar Plot

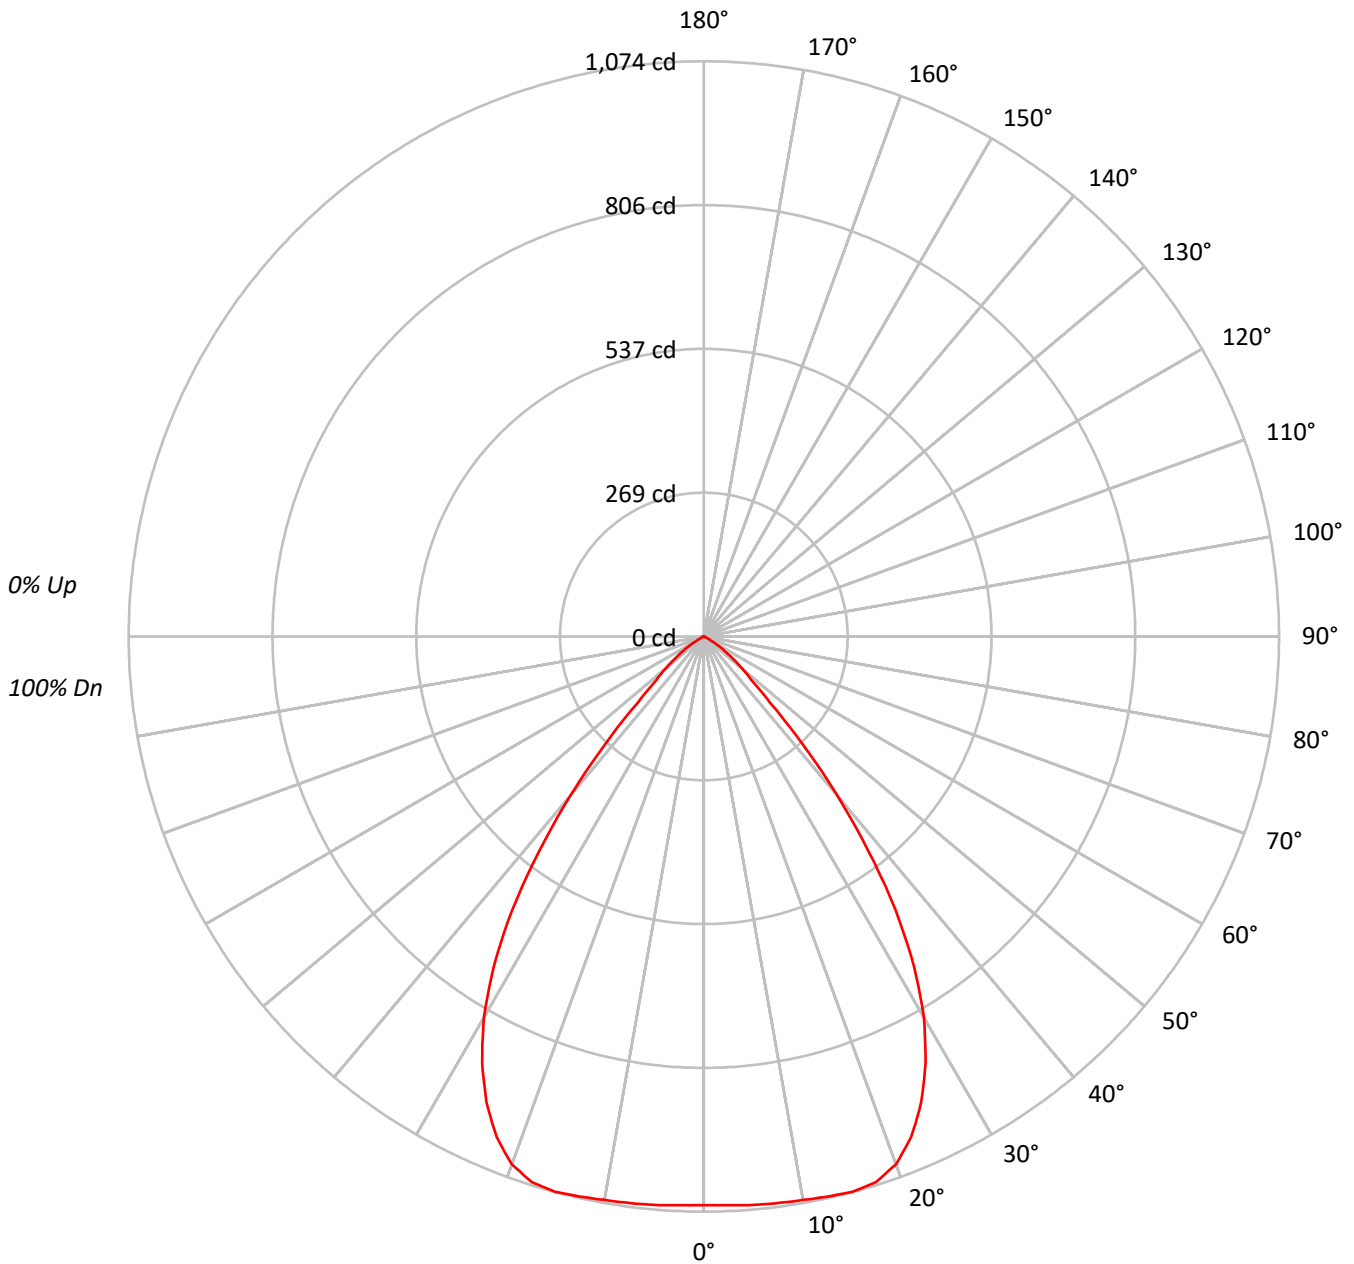



TEST NUMBER: P641246

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 1200LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	101	97	93	105	100	96	92	96	93	90	93	91	88	91	88	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78	78	78	78
4	95	87	81	76	93	85	80	75	83	78	75	81	77	74	79	76	73	71	71	71	71
5	89	80	74	69	88	79	73	69	77	72	68	76	71	68	74	70	67	65	65	65	65
6	84	74	68	63	83	74	67	63	72	67	63	71	66	62	69	65	62	60	60	60	60
7	79	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55	55	55	55
8	75	65	58	54	74	64	58	53	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48	48	48	48
10	67	57	50	46	66	56	50	46	55	50	46	55	49	46	54	49	46	44	44	44	44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	83812
5°	84449
10°	85634
15°	87741
20°	88082
25°	83626
30°	74873
35°	60192
40°	39870
45°	19604
50°	11520
55°	6730
60°	2289
65°	486
70°	300
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 19604 cd/sqm



TEST NUMBER: P641246

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 1200LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	101.8	7.1
10°-20°	302.5	21.2
20°-30°	437.0	30.6
30°-40°	381.5	26.7
40°-50°	153.3	10.7
50°-60°	45.0	3.2
60°-70°	4.8	0.3
70°-80°	0.5	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	841.3	59.0
0°-40°	1222.8	85.7
0°-60°	1421.1	99.6
0°-90°	1426.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1426.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1062	
5°	1066	102
15°	1074	302
25°	960	437
35°	625	382
45°	176	153
55°	49	45
65°	3	5
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P641246

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 1200LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1061.7
2.5°	1063.1
5°	1065.7
7.5°	1067.0
10°	1068.3
12.5°	1071.0
15°	1073.6
17.5°	1068.3
20°	1048.5
22.5°	1011.6
25°	960.1
27.5°	896.7
30°	821.4
32.5°	730.3
35°	624.6
37.5°	504.5
40°	386.9
42.5°	272.0
45°	175.6
47.5°	120.2
50°	93.8
52.5°	68.7
55°	48.9
57.5°	31.7
60°	14.5
62.5°	7.9
65°	2.6
67.5°	1.3
70°	1.3
72.5°	1.3
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)