

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641250

Luminaire Tested: ML5612LSVWFL7597FS1E - 592H - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641250
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-72)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 592H - 1200LM - 5000K
Description: ML56 RR, 75D TIR OPTIC, 5" HAZE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1622.2 lumens
Efficiency: N/A
Efficacy: 98.3 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.07
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641250

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 1200LM - 5000K

Luminous Intensity Polar Plot

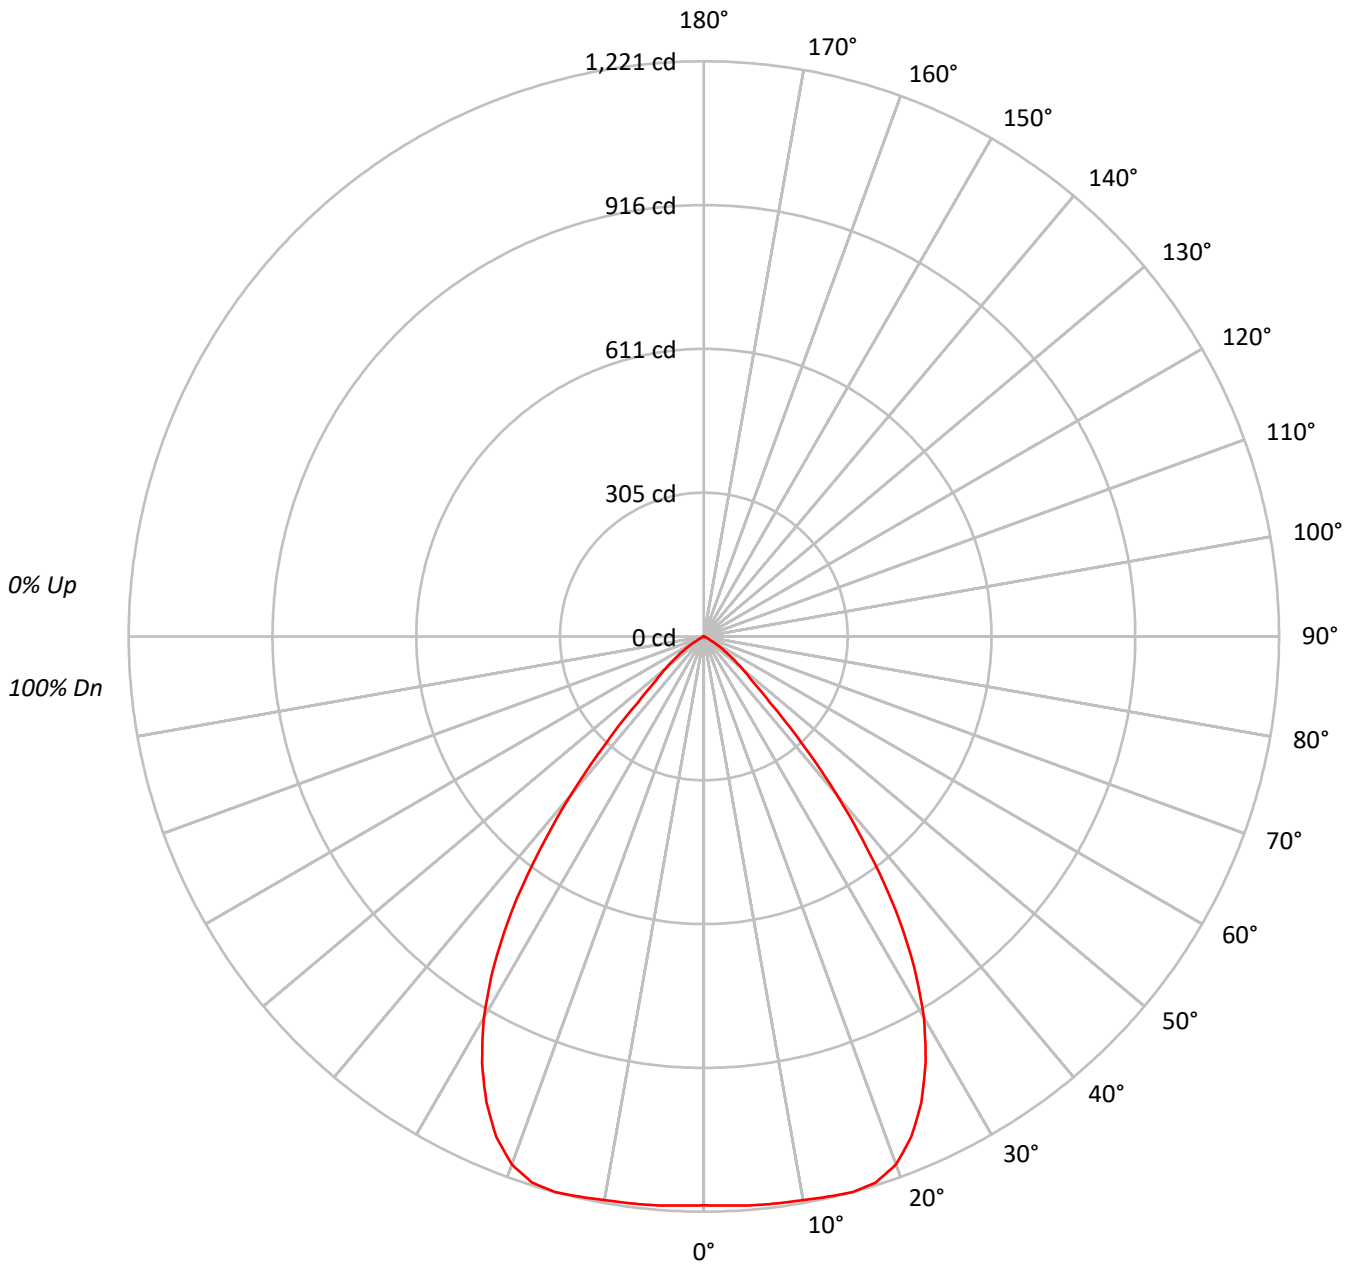



TEST NUMBER: P641250

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93				
2	107	101	97	93	105	100	96	92	96	93	90	93	91	88	91	88	87	85				
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78				
4	95	87	81	76	93	85	80	75	83	78	75	81	77	74	79	76	73	71				
5	89	80	74	69	88	79	73	69	77	72	68	76	71	68	74	70	67	65				
6	84	74	68	63	83	74	67	63	72	67	63	71	66	62	69	65	62	60				
7	79	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55				
8	75	65	58	54	74	64	58	53	63	57	53	62	57	53	61	56	53	51				
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48				
10	67	57	50	46	66	56	50	46	55	50	46	55	49	46	54	49	46	44				

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	95321
5°	96042
10°	97393
15°	99787
20°	100170
25°	95098
30°	85146
35°	68461
40°	45342
45°	22294
50°	13092
55°	7652
60°	2605
65°	560
70°	346
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 22294 cd/sqm



TEST NUMBER: P641250

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.8	7.1
10°-20°	344.0	21.2
20°-30°	497.0	30.6
30°-40°	433.9	26.7
40°-50°	174.4	10.7
50°-60°	51.1	3.2
60°-70°	5.5	0.3
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	956.8	59.0
0°-40°	1390.6	85.7
0°-60°	1616.1	99.6
0°-90°	1622.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1622.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1208	
5°	1212	116
15°	1221	344
25°	1092	497
35°	710	434
45°	200	174
55°	56	51
65°	3	5
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P641250

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1207.5
2.5°	1209.0
5°	1212.0
7.5°	1213.5
10°	1215.0
12.5°	1218.0
15°	1221.0
17.5°	1215.0
20°	1192.4
22.5°	1150.4
25°	1091.8
27.5°	1019.7
30°	934.1
32.5°	830.5
35°	710.4
37.5°	573.7
40°	440.0
42.5°	309.4
45°	199.7
47.5°	136.7
50°	106.6
52.5°	78.1
55°	55.6
57.5°	36.0
60°	16.5
62.5°	9.0
65°	3.0
67.5°	1.5
70°	1.5
72.5°	1.5
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)