

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641253

Luminaire Tested: ML5612LSVWFL7597FS1E - 592H - 600LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641253
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-72)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 592H - 600LM - 3500K
Description: ML56 RR, 75D TIR OPTIC, 5" HAZE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 970.4 lumens
Efficiency: N/A
Efficacy: 94.2 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.07
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641253
CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 600LM - 3500K

Luminous Intensity Polar Plot

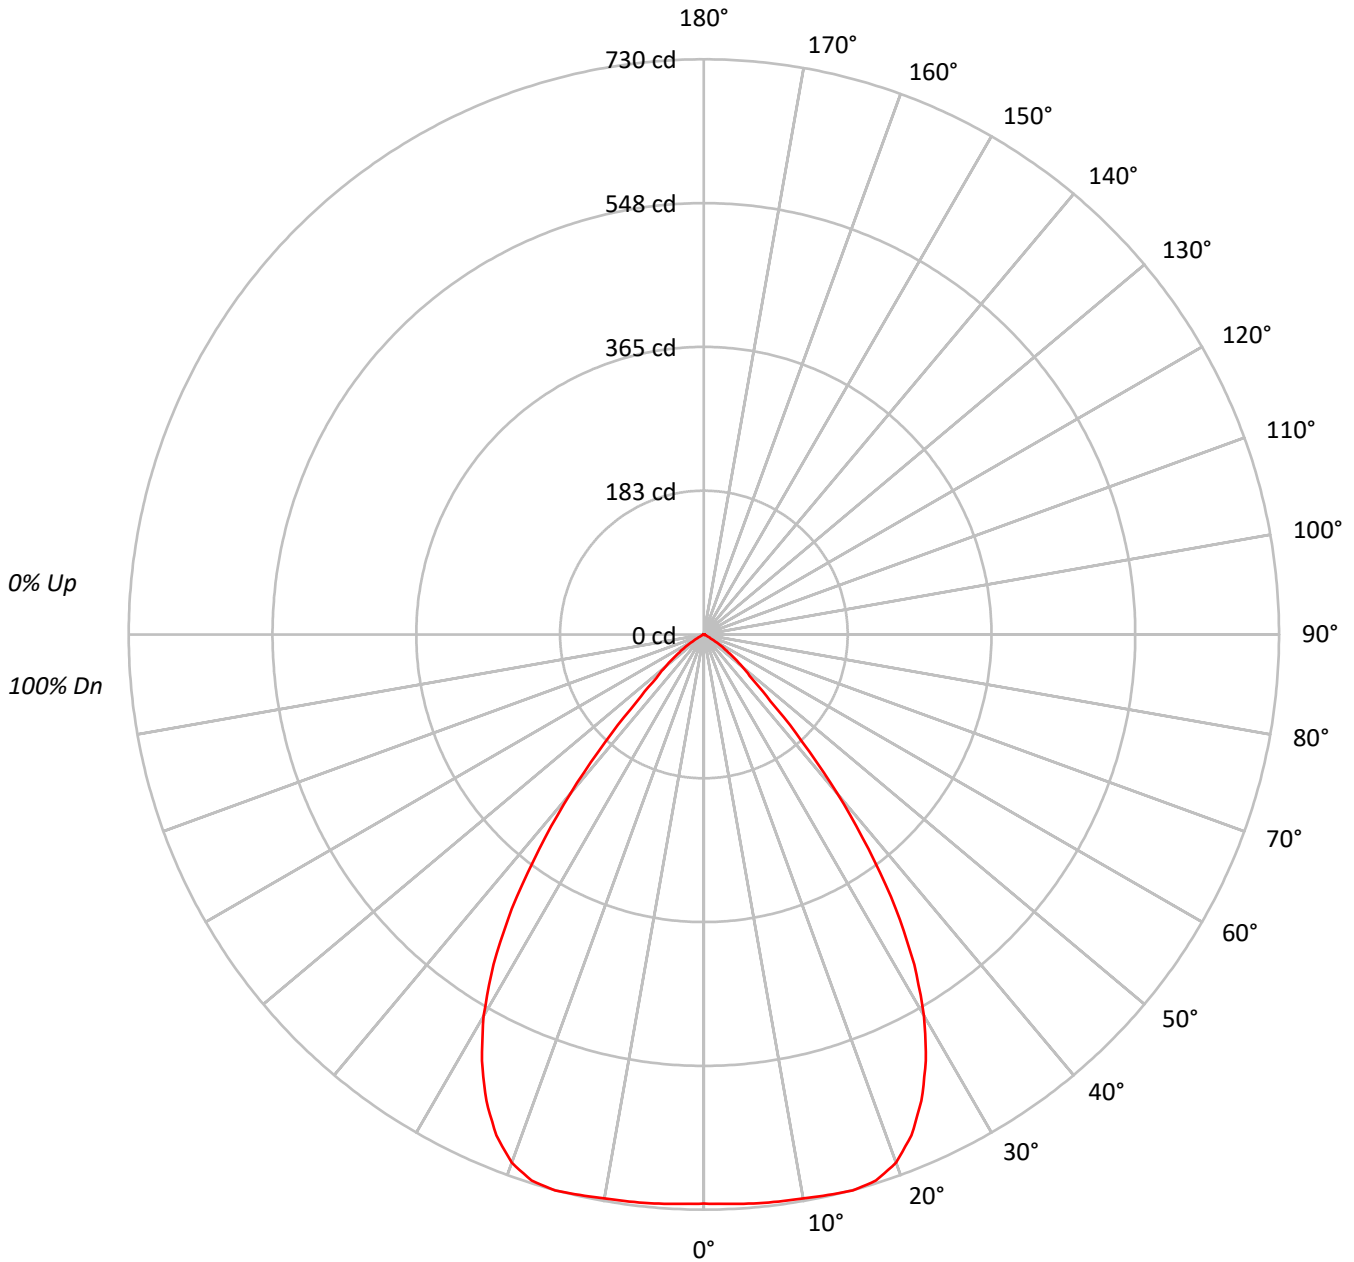



TEST NUMBER: P641253

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 600LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	101	97	93	105	100	96	92	96	93	90	93	91	88	91	88	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78	78	78	78
4	95	87	81	76	93	85	80	75	83	78	75	81	77	74	79	76	73	71	71	71	71
5	89	80	74	69	88	79	73	69	77	72	68	76	71	68	74	70	67	65	65	65	65
6	84	74	68	63	83	74	67	63	72	67	63	71	66	62	69	65	62	60	60	60	60
7	79	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55	55	55	55
8	75	65	58	54	74	64	58	53	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48	48	48	48
10	67	57	50	46	66	56	50	46	55	50	46	55	49	46	54	49	46	44	44	44	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	57019
5°	57451
10°	58259
15°	59692
20°	59922
25°	56886
30°	50936
35°	40947
40°	27123
45°	13341
50°	7835
55°	4569
60°	1563
65°	336
70°	208
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13341 cd/sqm



TEST NUMBER: P641253

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 600LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.2	7.1
10°-20°	205.8	21.2
20°-30°	297.3	30.6
30°-40°	259.5	26.7
40°-50°	104.3	10.8
50°-60°	30.6	3.2
60°-70°	3.3	0.3
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	572.3	59.0
0°-40°	831.9	85.7
0°-60°	966.8	99.6
0°-90°	970.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	970.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	722	
5°	725	69
15°	730	206
25°	653	297
35°	425	260
45°	120	104
55°	33	31
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641253

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592H - 600LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	722.3
2.5°	723.2
5°	725.0
7.5°	725.9
10°	726.8
12.5°	728.6
15°	730.4
17.5°	726.8
20°	713.3
22.5°	688.2
25°	653.1
27.5°	610.0
30°	558.8
32.5°	496.8
35°	424.9
37.5°	343.2
40°	263.2
42.5°	185.1
45°	119.5
47.5°	81.8
50°	63.8
52.5°	46.7
55°	33.2
57.5°	21.6
60°	9.9
62.5°	5.4
65°	1.8
67.5°	0.9
70°	0.9
72.5°	0.9
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)