

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641275

Luminaire Tested: ML5612LSVWFL7597FS1E - 592SC - 900LM - 5000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P641275  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-71)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSVWFL7597FS1E - 592SC - 900LM - 5000K  
Description: ML56 RR, 75D TIR OPTIC, 5" SPECULAR CLEAR TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1347.5 lumens  
Efficiency: N/A  
Efficacy: 101.3 lumens/watt  
Spacing Criteria (0/90/45): 1.15 / 1.15 / 1.07  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct

Input Watts (W): 13.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P641275  
CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592SC - 900LM - 5000K

### Luminous Intensity Polar Plot

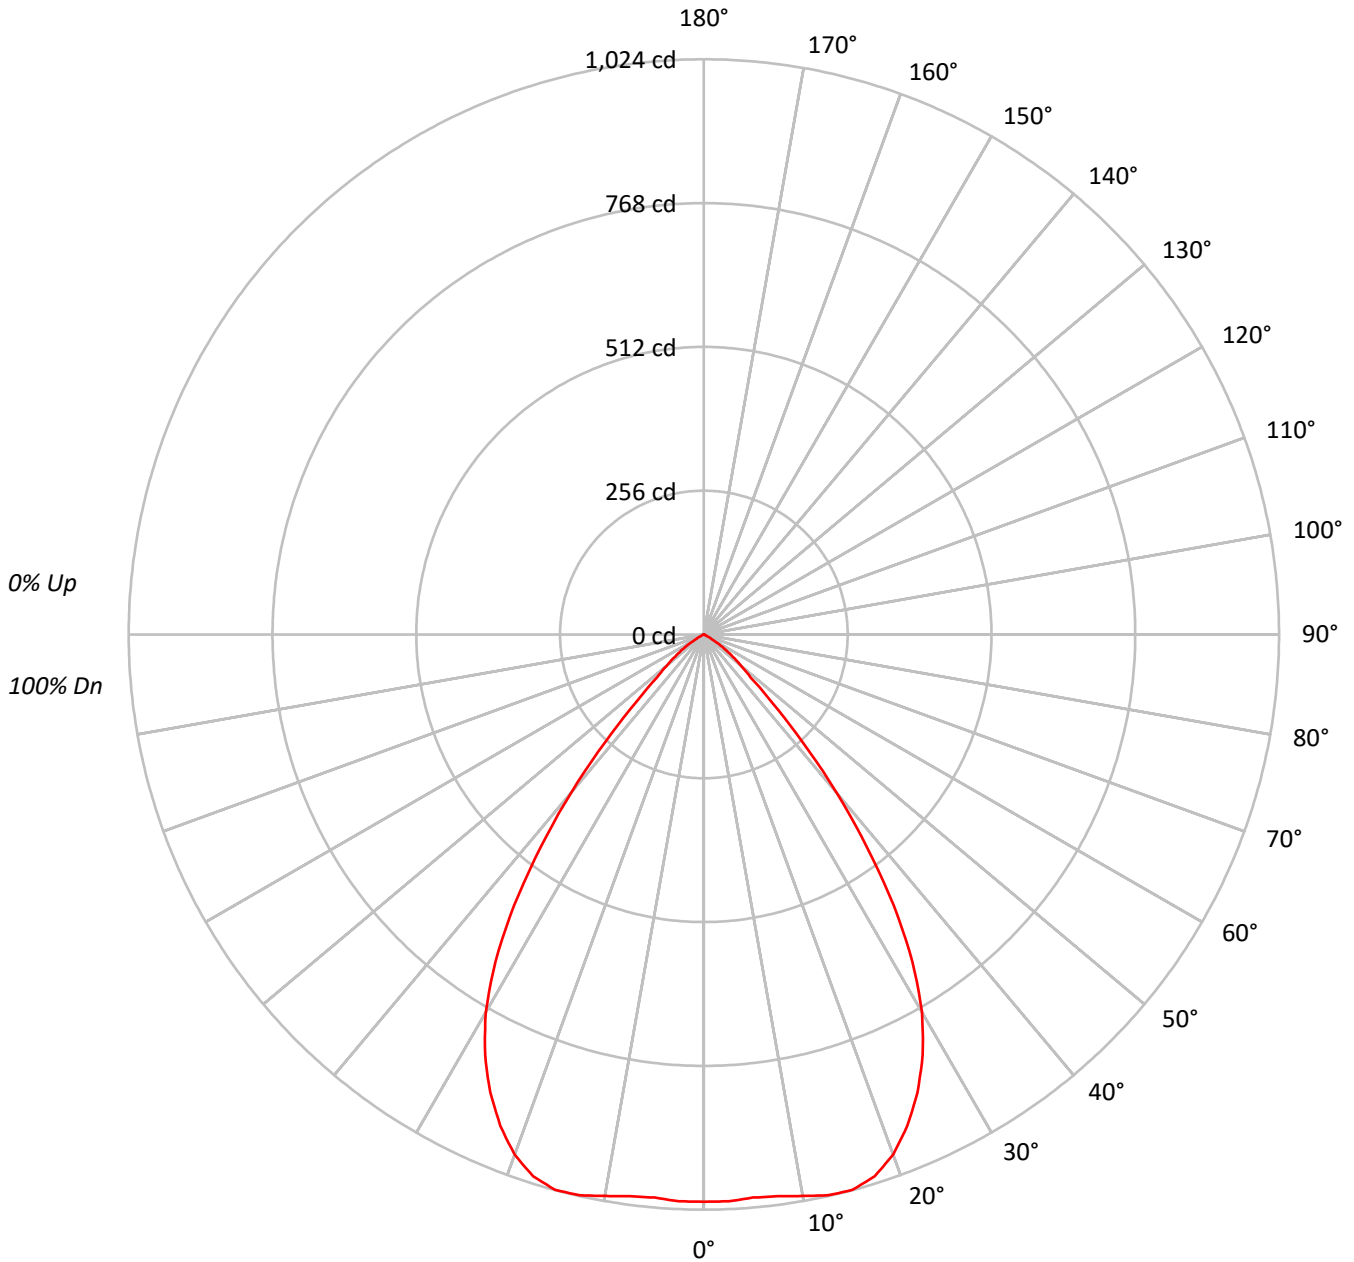



TEST NUMBER: P641275

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592SC - 900LM - 5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	102	97	93	105	100	96	92	96	93	90	93	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78	78	78	78
4	95	87	81	76	93	85	80	75	83	78	75	81	77	74	79	76	73	71	71	71	71
5	89	80	74	69	88	79	73	69	77	72	68	76	71	68	74	70	67	65	65	65	65
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60	60	60	60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55	55	55	55
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48	48	48	48
10	67	57	50	46	66	56	50	46	55	50	46	55	49	46	54	49	46	44	44	44	44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	79730
5°	79734
10°	81353
15°	83654
20°	82764
25°	78348
30°	70799
35°	56800
40°	37850
45°	19113
50°	10672
55°	6317
60°	2352
65°	467
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 19113 cd/sqm



TEST NUMBER: P641275

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592SC - 900LM - 5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	96.4	7.2
10°-20°	287.1	21.3
20°-30°	410.4	30.5
30°-40°	360.6	26.8
40°-50°	146.2	10.8
50°-60°	42.3	3.1
60°-70°	4.5	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	793.9	58.9
0°-40°	1154.6	85.7
0°-60°	1343.0	99.7
0°-90°	1347.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1347.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1010	
5°	1006	96
15°	1024	287
25°	900	410
35°	589	361
45°	171	146
55°	46	42
65°	2	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641275

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 592SC - 900LM - 5000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1010.0
2.5°	1010.0
5°	1006.2
7.5°	1008.7
10°	1014.9
12.5°	1022.4
15°	1023.6
17.5°	1011.2
20°	985.2
22.5°	946.7
25°	899.5
27.5°	843.7
30°	776.7
32.5°	691.1
35°	589.4
37.5°	476.4
40°	367.3
42.5°	259.3
45°	171.2
47.5°	112.9
50°	86.9
52.5°	64.5
55°	45.9
57.5°	29.8
60°	14.9
62.5°	7.4
65°	2.5
67.5°	1.2
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)