

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641313

Luminaire Tested: ML5612LSVWFL7597FS1E - 593SNB - 600LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641313
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 593SNB - 600LM - 3500K
Description: ML56 RR, 75D TIR OPTIC, 5" SATIN NICKLE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 947.9 lumens
Efficiency: N/A
Efficacy: 92.0 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641313

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593SNB - 600LM - 3500K

Luminous Intensity Polar Plot

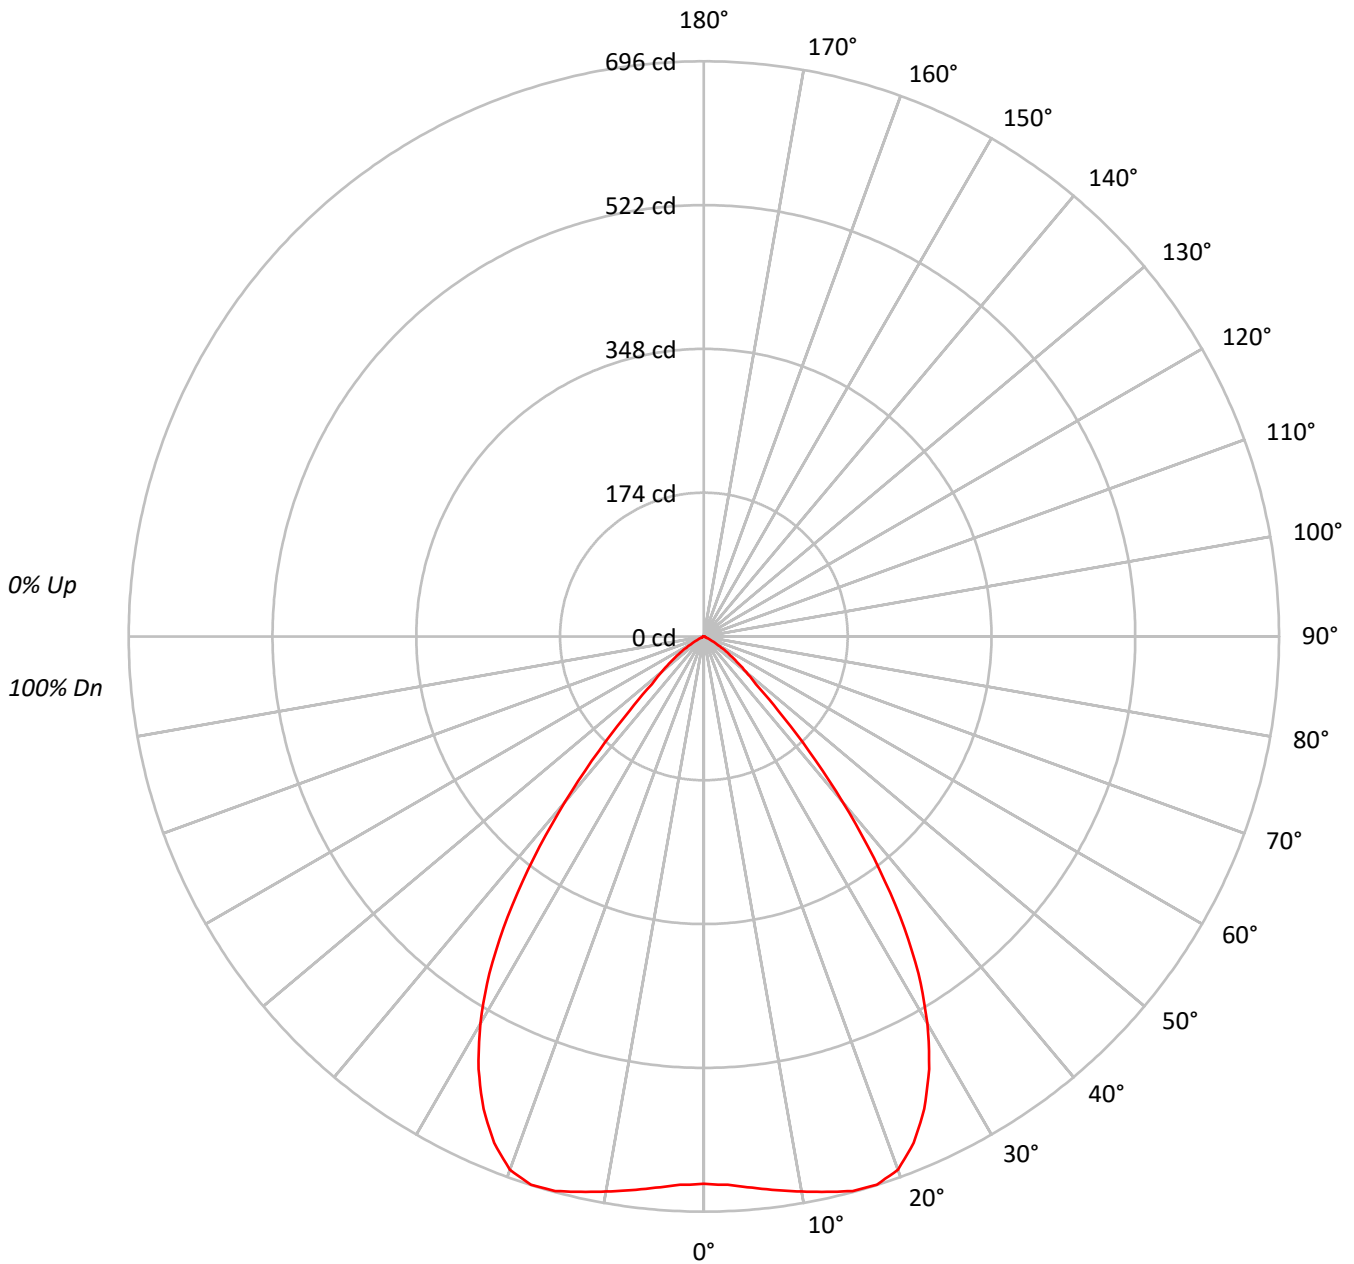



TEST NUMBER: P641313

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593SNB - 600LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	92	92	92
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	95	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	71	71	71	71
5	89	80	73	68	87	79	73	68	77	72	67	75	70	67	74	69	66	65	65	65	65
6	84	74	67	63	82	73	67	62	72	66	62	70	65	61	69	64	61	59	59	59	59
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55	55	55	55
8	75	64	57	53	73	63	57	53	62	57	52	61	56	52	60	55	52	50	50	50	50
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	47	47	47
10	67	56	50	45	66	56	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	52290
5°	53061
10°	54676
15°	56775
20°	57679
25°	54952
30°	49314
35°	39926
40°	26948
45°	14145
50°	8167
55°	5065
60°	2273
65°	672
70°	415
75°	275
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14145 cd/sqm



TEST NUMBER: P641313

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593SNB - 600LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	64.3	6.8
10°-20°	195.9	20.7
20°-30°	287.1	30.3
30°-40°	253.6	26.8
40°-50°	107.1	11.3
50°-60°	33.8	3.6
60°-70°	5.1	0.5
70°-80°	0.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	547.4	57.7
0°-40°	801.0	84.5
0°-60°	941.9	99.4
0°-90°	947.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	947.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	662	
5°	670	64
15°	695	196
25°	631	287
35°	414	254
45°	127	107
55°	37	34
65°	4	5
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P641313

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593SNB - 600LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	662.4
2.5°	664.2
5°	669.6
7.5°	675.8
10°	682.1
12.5°	688.4
15°	694.7
17.5°	695.6
20°	686.6
22.5°	663.3
25°	630.9
27.5°	590.5
30°	541.0
32.5°	483.5
35°	414.3
37.5°	337.9
40°	261.5
42.5°	187.8
45°	126.7
47.5°	85.4
50°	66.5
52.5°	50.3
55°	36.8
57.5°	25.2
60°	14.4
62.5°	7.2
65°	3.6
67.5°	1.8
70°	1.8
72.5°	0.9
75°	0.9
77.5°	0.9
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)