

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641329

Luminaire Tested: ML5612LSVWFL7597FS1E - 593TBZB - 600LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641329
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-77)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 593TBZB - 600LM - 4000K
Description: ML56 RR, 75D TIR OPTIC, 5" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 997.7 lumens
Efficiency: N/A
Efficacy: 96.9 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641329

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593TBZB - 600LM - 4000K

Luminous Intensity Polar Plot

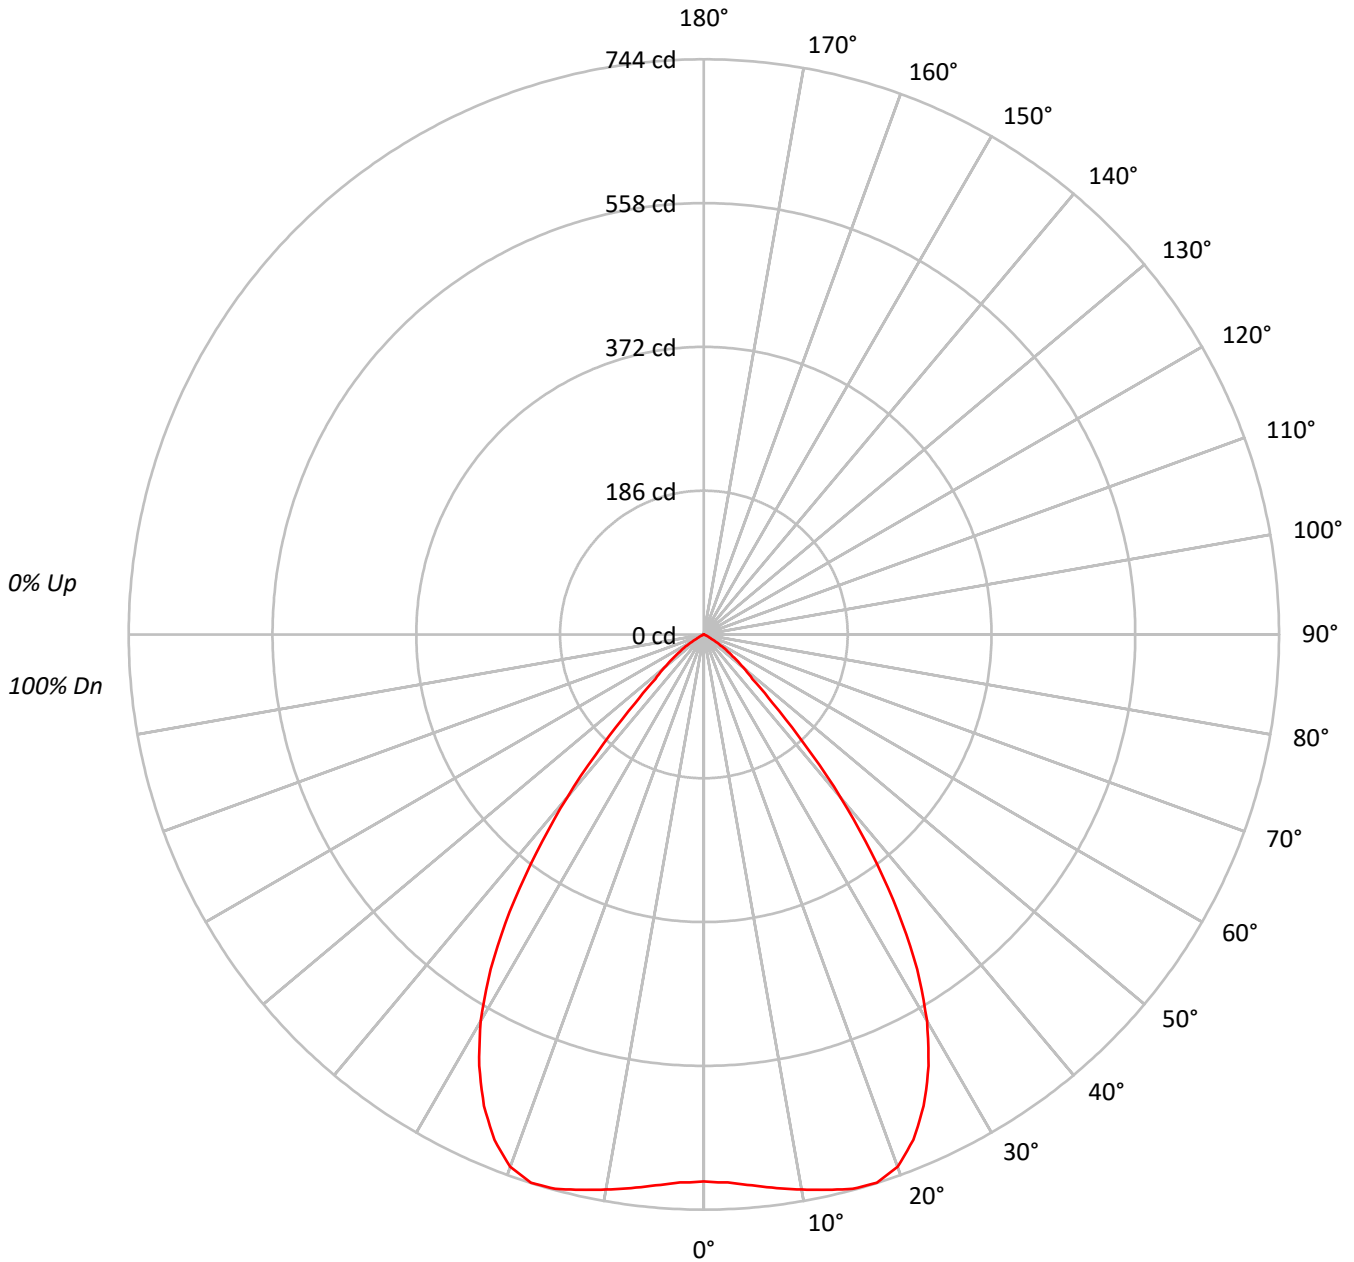



TEST NUMBER: P641329

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593TBZB - 600LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92				
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85				
3	101	94	88	84	99	92	87	83	89	85	82	87	83	80	85	82	79	78				
4	95	86	80	76	93	85	80	75	83	78	74	81	77	73	79	76	73	71				
5	89	80	74	69	88	79	73	69	77	72	68	76	71	67	74	70	67	65				
6	84	74	68	63	83	73	67	63	72	66	62	70	66	62	69	65	61	60				
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55				
8	75	64	58	53	74	64	58	53	63	57	53	62	56	53	61	56	52	51				
9	71	60	54	49	70	60	53	49	59	53	49	58	53	49	57	52	49	47				
10	67	56	50	46	66	56	50	46	55	49	46	54	49	45	53	49	45	44				

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	55866
5°	56690
10°	58436
15°	60681
20°	61560
25°	58611
30°	52614
35°	42210
40°	28390
45°	14033
50°	8191
55°	4927
60°	1674
65°	355
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14033 cd/sqm



TEST NUMBER: P641329

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593TBZB - 600LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.7	6.9
10°-20°	209.4	21.0
20°-30°	306.3	30.7
30°-40°	268.5	26.9
40°-50°	109.0	10.9
50°-60°	32.5	3.3
60°-70°	3.4	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	584.4	58.6
0°-40°	852.9	85.5
0°-60°	994.3	99.7
0°-90°	997.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	997.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	708	
5°	715	69
15°	742	209
25°	673	306
35°	438	268
45°	126	109
55°	36	32
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641329

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593TBZB - 600LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	707.7
2.5°	709.6
5°	715.4
7.5°	722.2
10°	729.0
12.5°	735.7
15°	742.5
17.5°	743.5
20°	732.8
22.5°	707.7
25°	672.9
27.5°	629.4
30°	577.2
32.5°	513.4
35°	438.0
37.5°	355.8
40°	275.5
42.5°	192.4
45°	125.7
47.5°	85.1
50°	66.7
52.5°	49.3
55°	35.8
57.5°	23.2
60°	10.6
62.5°	5.8
65°	1.9
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)