

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641338

Luminaire Tested: ML5612LSVWFL7597FS1E - 593WB - 1200LM - 3500K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P641338  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-74)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSVWFL7597FS1E - 593WB - 1200LM - 3500K  
Description: ML56 RR, 75D TIR OPTIC, 5" WHITE BAFFLE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1501.5 lumens  
Efficiency: N/A  
Efficacy: 91.0 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct


Input Watts (W): 16.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P641338

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593WB - 1200LM - 3500K

### Luminous Intensity Polar Plot

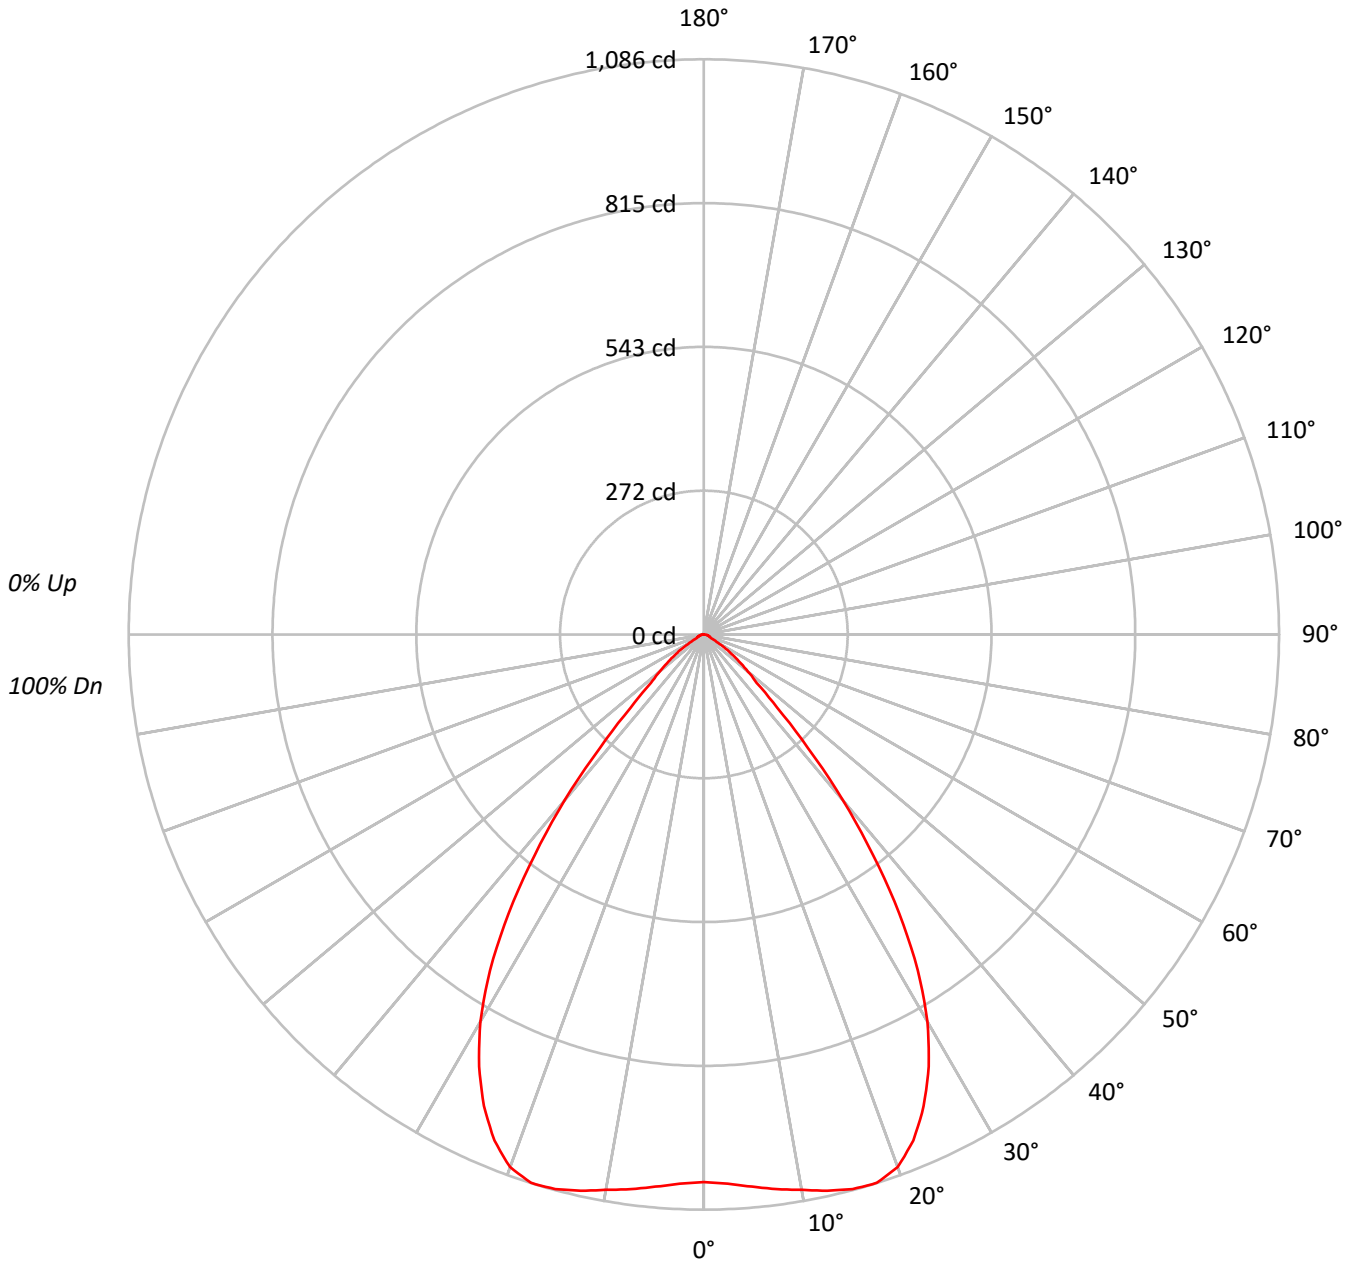



TEST NUMBER: P641338

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593WB - 1200LM - 3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	96	96	95	94	92			92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	85	84			84
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76			76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70			70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64			64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	61	68	64	60	59			59
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54			54
8	74	63	57	52	73	63	56	52	62	56	52	61	55	51	60	55	51	50			50
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	48	46			46
10	66	55	49	45	65	55	49	45	54	48	44	53	48	44	52	48	44	43			43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	81617
5°	82927
10°	85337
15°	88607
20°	89904
25°	85560
30°	76951
35°	61985
40°	42127
45°	21803
50°	13362
55°	8836
60°	4405
65°	2615
70°	2585
75°	2562
80°	2546
85°	2536

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21803 cd/sqm



TEST NUMBER: P641338

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593WB - 1200LM - 3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	100.5	6.7
10°-20°	305.8	20.4
20°-30°	447.4	29.8
30°-40°	394.5	26.3
40°-50°	167.1	11.1
50°-60°	58.1	3.9
60°-70°	16.2	1.1
70°-80°	8.9	0.6
80°-90°	3.0	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	853.7	56.9
0°-40°	1248.2	83.1
0°-60°	1473.4	98.1
0°-90°	1501.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1501.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1034	
5°	1046	100
15°	1084	306
25°	982	447
35°	643	394
45°	195	167
55°	64	58
65°	14	16
75°	8	9
85°	3	3
90°	0	



TEST NUMBER: P641338

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 593WB - 1200LM - 3500K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1033.9
2.5°	1038.1
5°	1046.5
7.5°	1056.3
10°	1064.6
12.5°	1075.8
15°	1084.2
17.5°	1085.6
20°	1070.2
22.5°	1033.9
25°	982.3
27.5°	919.5
30°	844.2
32.5°	752.1
35°	643.2
37.5°	524.6
40°	408.8
42.5°	290.2
45°	195.3
47.5°	135.3
50°	108.8
52.5°	83.7
55°	64.2
57.5°	46.0
60°	27.9
62.5°	19.5
65°	14.0
67.5°	12.6
70°	11.2
72.5°	9.8
75°	8.4
77.5°	7.0
80°	5.6
82.5°	4.2
85°	2.8
87.5°	1.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)