

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641353

Luminaire Tested: ML5612LSVWFL7597FS1E - 594SNB - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641353
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-79)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 594SNB - 1200LM - 3500K
Description: ML56 RR, 75D TIR OPTIC, 5" SATIN NICKLE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1530.8 lumens
Efficiency: N/A
Efficacy: 92.8 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641353

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 594SNB - 1200LM - 3500K

Luminous Intensity Polar Plot

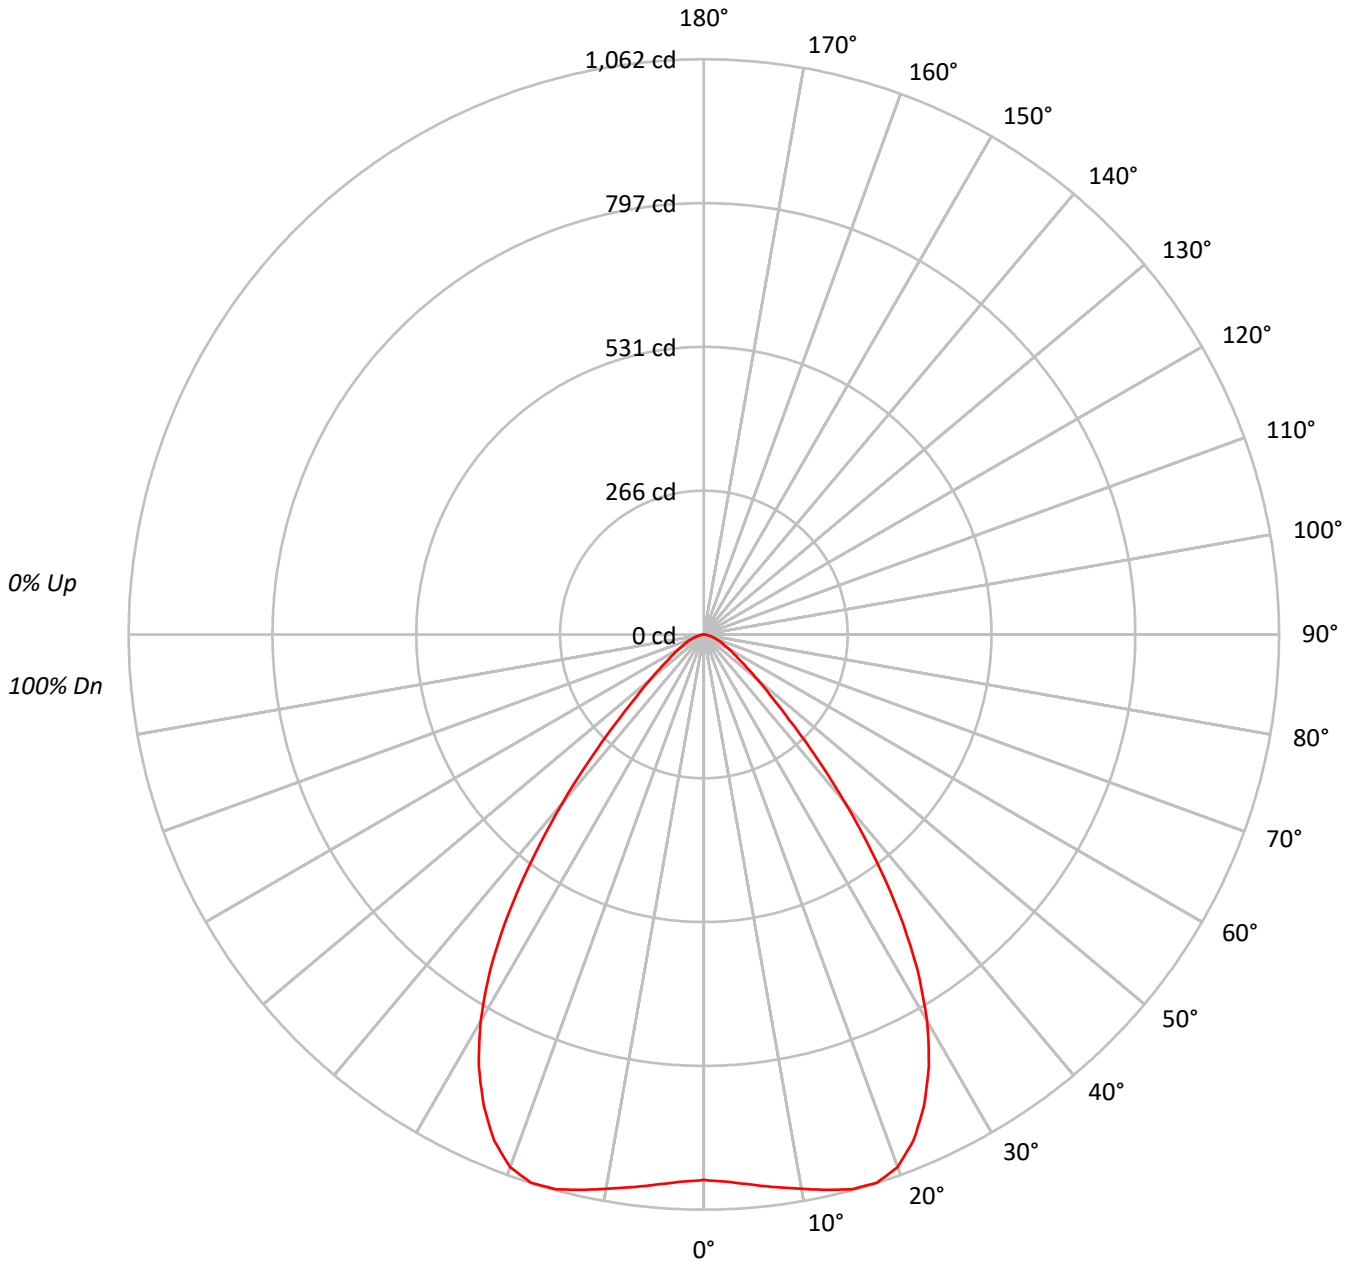



TEST NUMBER: P641353

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 594SNB - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	84	83																			
3	99	92	86	81	97	90	85	80	87	83	79	85	81	78	83	79	77	75																			
4	93	84	78	73	91	83	77	72	81	76	72	79	74	71	77	73	70	68																			
5	87	78	71	66	86	77	70	66	75	69	65	73	68	64	71	67	64	62																			
6	82	72	65	60	81	71	64	60	69	64	59	68	63	59	67	62	58	57																			
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52																			
8	73	62	55	50	72	61	55	50	60	54	50	59	54	50	58	53	50	48																			
9	69	58	51	47	68	57	51	47	56	50	46	55	50	46	54	50	46	44																			
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	79501
5°	80804
10°	83301
15°	86637
20°	87888
25°	83713
30°	75147
35°	60626
40°	41828
45°	24918
50°	15757
55°	10749
60°	8368
65°	6780
70°	5470
75°	4240
80°	2546
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 24918 cd/sqm



TEST NUMBER: P641353

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 594SNB - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.0	6.4
10°-20°	298.9	19.5
20°-30°	437.6	28.6
30°-40°	386.3	25.2
40°-50°	183.3	12.0
50°-60°	73.8	4.8
60°-70°	36.7	2.4
70°-80°	14.9	1.0
80°-90°	1.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	834.4	54.5
0°-40°	1220.6	79.7
0°-60°	1477.7	96.5
0°-90°	1530.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1530.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1007	
5°	1020	98
15°	1060	299
25°	961	438
35°	629	386
45°	223	183
55°	78	74
65°	36	37
75°	14	15
85°	0	2
90°	0	



TEST NUMBER: P641353

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 594SNB - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1007.1
2.5°	1011.3
5°	1019.7
7.5°	1029.4
10°	1039.2
12.5°	1050.4
15°	1060.1
17.5°	1061.5
20°	1046.2
22.5°	1011.3
25°	961.1
27.5°	899.7
30°	824.4
32.5°	733.7
35°	629.1
37.5°	514.7
40°	405.9
42.5°	305.5
45°	223.2
47.5°	166.0
50°	128.3
52.5°	99.0
55°	78.1
57.5°	64.2
60°	53.0
62.5°	43.2
65°	36.3
67.5°	30.7
70°	23.7
72.5°	18.1
75°	13.9
77.5°	9.8
80°	5.6
82.5°	2.8
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)