

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641375

Luminaire Tested: ML5612LSVWFL7597FS1E - 594TBZB - 600LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641375
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-80)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 594TBZB - 600LM - 5000K
Description: ML56 RR, 75D TIR OPTIC, 5" TUSCON BRONZE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1059.0 lumens
Efficiency: N/A
Efficacy: 102.8 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641375

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 594TBZB - 600LM - 5000K

Luminous Intensity Polar Plot

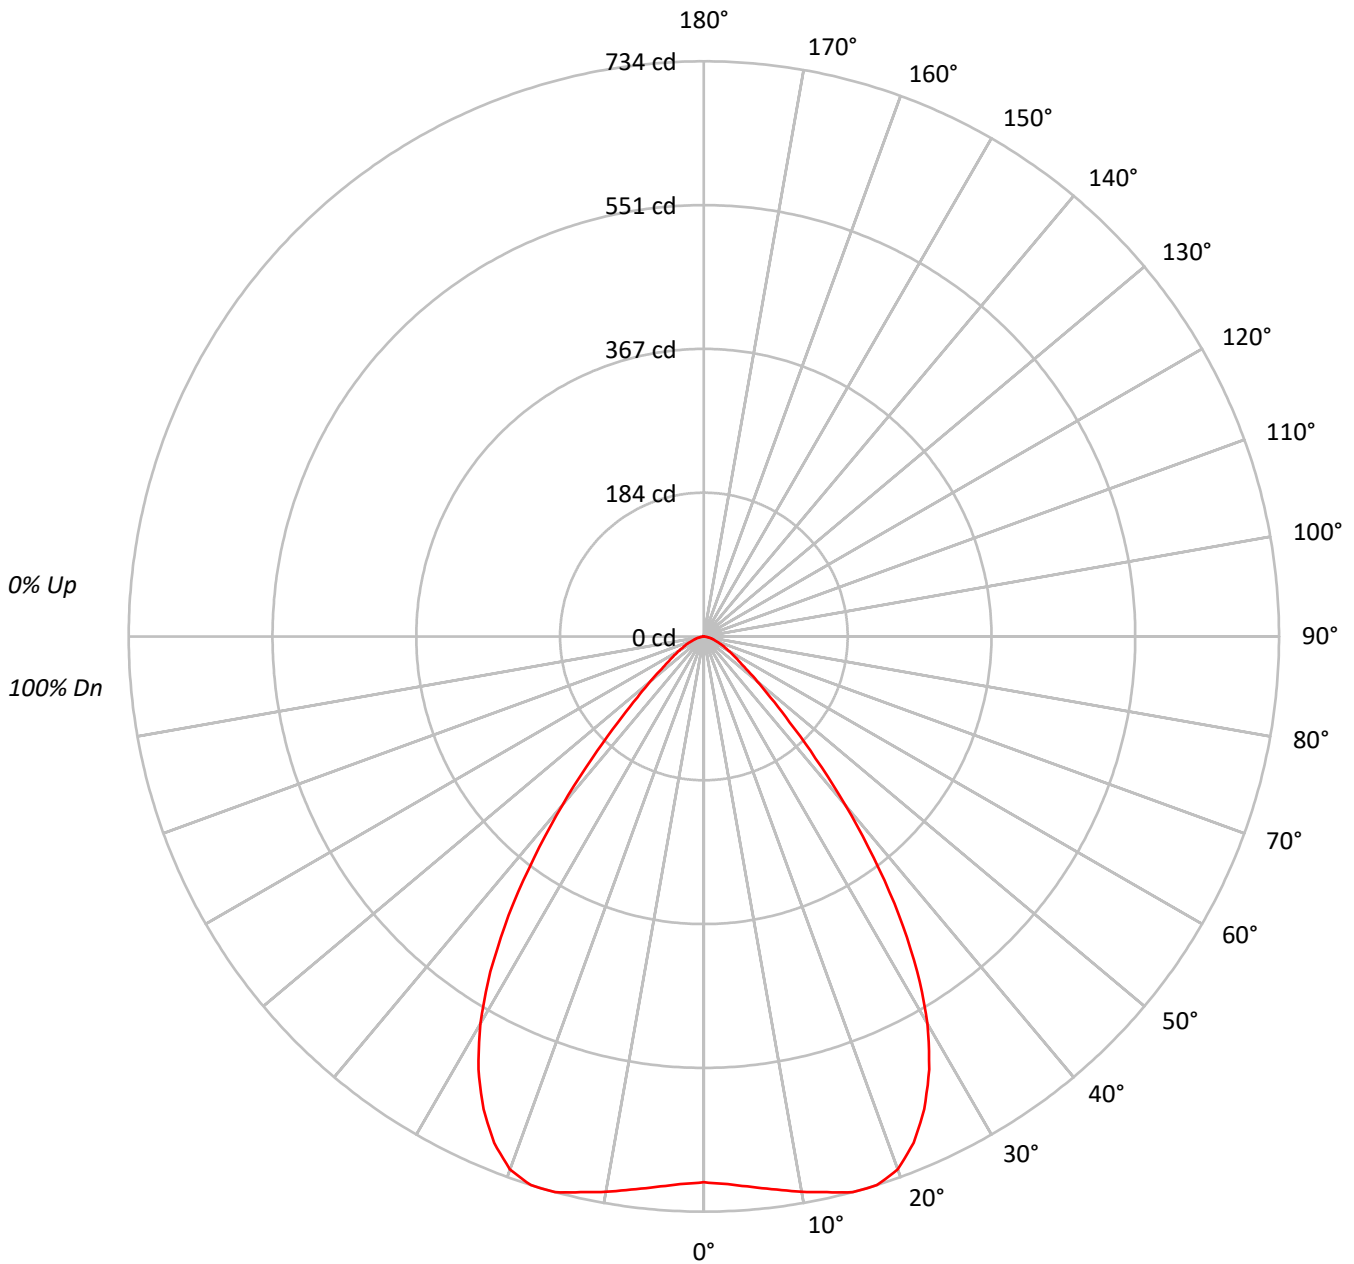



TEST NUMBER: P641375

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 594TBZB - 600LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20				
RC	80					70					50					30				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91		
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	84	83		
3	99	92	86	81	97	90	85	80	87	83	79	85	81	78	83	79	77	75		
4	93	84	78	73	91	83	77	72	81	76	72	79	74	71	77	73	70	68		
5	87	78	71	66	86	77	70	66	75	69	65	73	68	64	71	67	64	62		
6	82	72	65	60	81	71	64	60	69	64	59	68	63	59	67	62	58	57		
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52		
8	73	62	55	50	72	61	55	50	60	54	50	59	54	50	58	53	50	48		
9	69	58	51	47	68	57	51	47	56	50	46	55	50	46	54	50	46	44		
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	54982
5°	55882
10°	57690
15°	60003
20°	60779
25°	57966
30°	52021
35°	41853
40°	28906
45°	17282
50°	10930
55°	7460
60°	5810
65°	4707
70°	3785
75°	2959
80°	1773
85°	906

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17282 cd/sqm



TEST NUMBER: P641375

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 594TBZB - 600LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	67.8	6.4
10°-20°	206.8	19.5
20°-30°	302.8	28.6
30°-40°	267.0	25.2
40°-50°	126.8	12.0
50°-60°	51.0	4.8
60°-70°	25.2	2.4
70°-80°	10.3	1.0
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	577.4	54.5
0°-40°	844.4	79.7
0°-60°	1022.2	96.5
0°-90°	1059.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1059.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	696	
5°	705	68
15°	734	207
25°	666	303
35°	434	267
45°	155	127
55°	54	51
65°	25	25
75°	10	10
85°	1	1
90°	0	



TEST NUMBER: P641375

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 594TBZB - 600LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	696.5
2.5°	699.4
5°	705.2
7.5°	711.9
10°	719.7
12.5°	726.4
15°	734.2
17.5°	734.2
20°	723.5
22.5°	699.4
25°	665.5
27.5°	622.9
30°	570.7
32.5°	506.9
35°	434.3
37.5°	356.0
40°	280.5
42.5°	210.9
45°	154.8
47.5°	115.1
50°	89.0
52.5°	67.7
55°	54.2
57.5°	44.5
60°	36.8
62.5°	30.0
65°	25.2
67.5°	20.3
70°	16.4
72.5°	12.6
75°	9.7
77.5°	6.8
80°	3.9
82.5°	1.9
85°	1.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)