

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641428

Luminaire Tested: ML5612LSVWFL7597FS1E - 692H - 1200LM - 3500K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P641428  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-84)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSVWFL7597FS1E - 692H - 1200LM - 3500K  
Description: ML56 RR, 75D TIR OPTIC, 6" HAZE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1514.1 lumens  
Efficiency: N/A  
Efficacy: 91.8 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.08  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 16.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P641428

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692H - 1200LM - 3500K

### Luminous Intensity Polar Plot

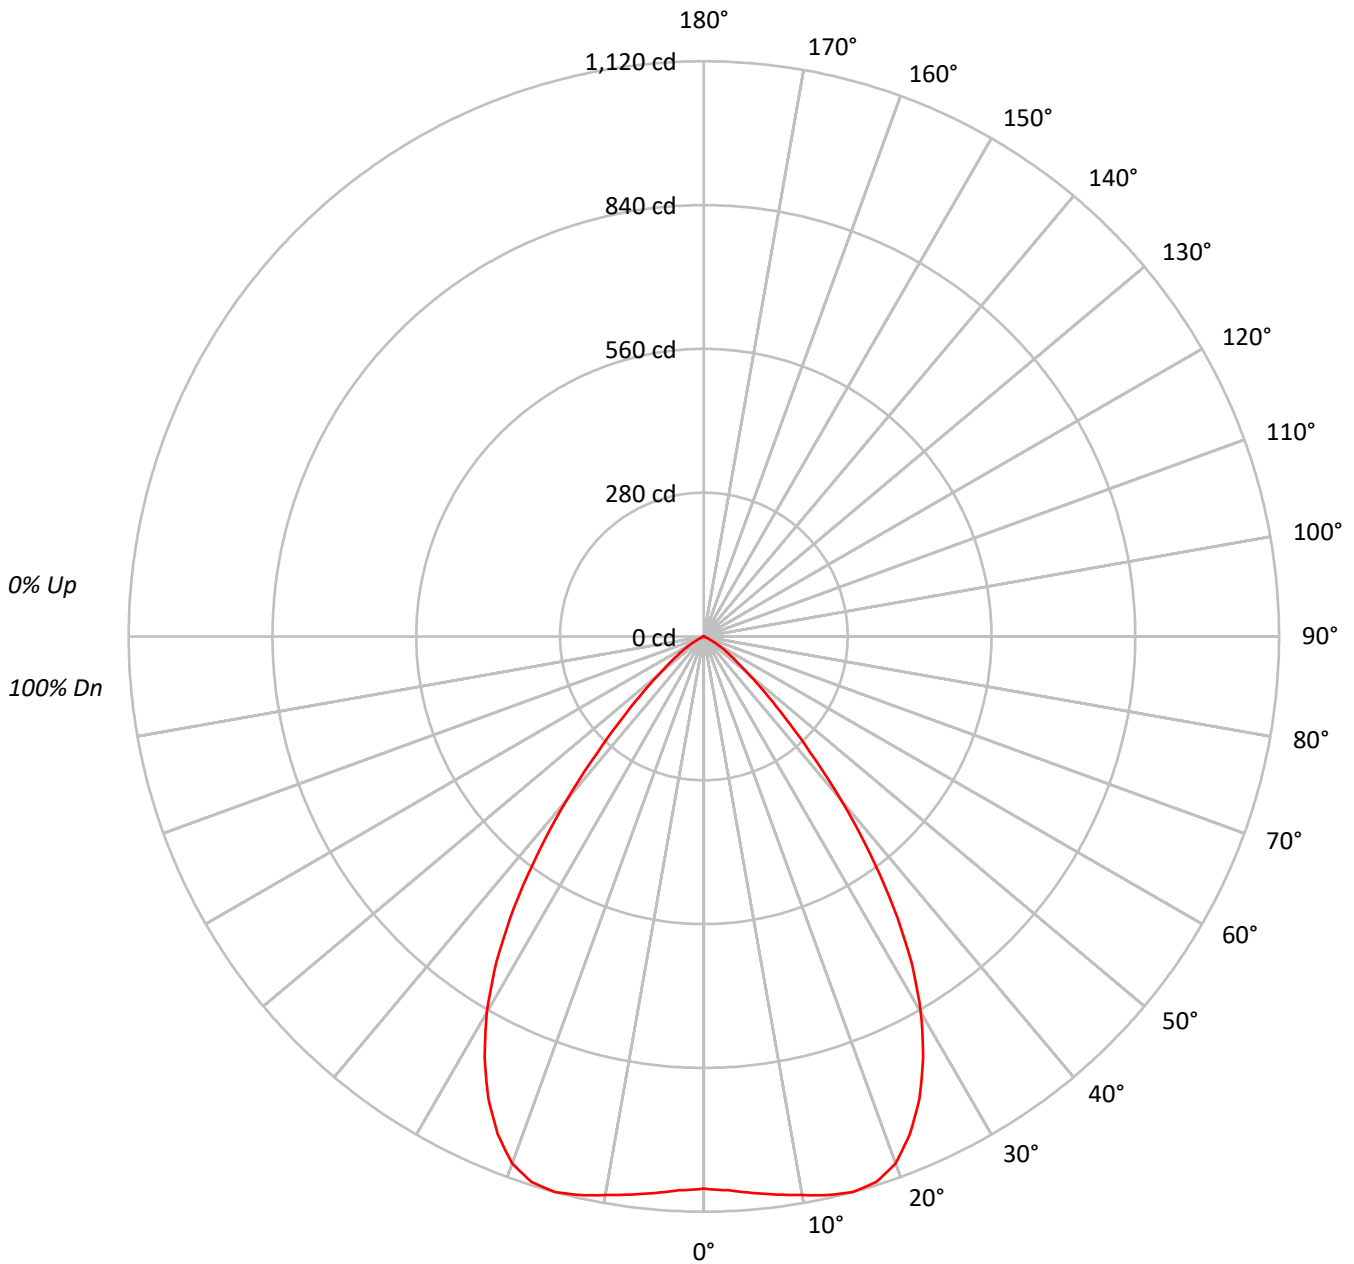



TEST NUMBER: P641428

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692H - 1200LM - 3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	92	92	92
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	94	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	70	70	70	70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65	65	65	65
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59	59	59	59
7	79	69	62	57	77	68	62	57	67	61	57	65	60	56	64	60	56	55	55	55	55
8	74	64	57	53	73	63	57	53	62	56	52	61	56	52	60	55	52	50	50	50	50
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	47	47	47
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	530482
5°	538699
10°	553344
15°	571976
20°	573295
25°	540519
30°	481458
35°	388065
40°	266770
45°	154690
50°	85660
55°	51611
60°	27531
65°	8172
70°	2020
75°	2669
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 154690 cd/sqm



TEST NUMBER: P641428

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692H - 1200LM - 3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	104.3	6.9
10°-20°	315.0	20.8
20°-30°	452.0	29.8
30°-40°	395.8	26.1
40°-50°	180.8	11.9
50°-60°	56.2	3.7
60°-70°	9.0	0.6
70°-80°	0.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	871.3	57.5
0°-40°	1267.1	83.7
0°-60°	1504.2	99.3
0°-90°	1514.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1514.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1075	
5°	1088	104
15°	1120	315
25°	993	452
35°	644	396
45°	222	181
55°	60	56
65°	7	9
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P641428

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692H - 1200LM - 3500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1075.2
2.5°	1079.4
5°	1087.7
7.5°	1096.1
10°	1104.5
12.5°	1114.2
15°	1119.8
17.5°	1114.2
20°	1091.9
22.5°	1048.7
25°	992.9
27.5°	924.6
30°	845.1
32.5°	751.7
35°	644.3
37.5°	528.5
40°	414.2
42.5°	306.8
45°	221.7
47.5°	159.0
50°	111.6
52.5°	80.9
55°	60.0
57.5°	43.2
60°	27.9
62.5°	12.6
65°	7.0
67.5°	2.8
70°	1.4
72.5°	1.4
75°	1.4
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)