

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641436

Luminaire Tested: ML5612LSVWFL7597FS1E - 692H - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641436
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-84)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 692H - 900LM - 2700K
Description: ML56 RR, 75D TIR OPTIC, 6" HAZE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1183.8 lumens
Efficiency: N/A
Efficacy: 89.0 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.08
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641436

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692H - 900LM - 2700K

Luminous Intensity Polar Plot

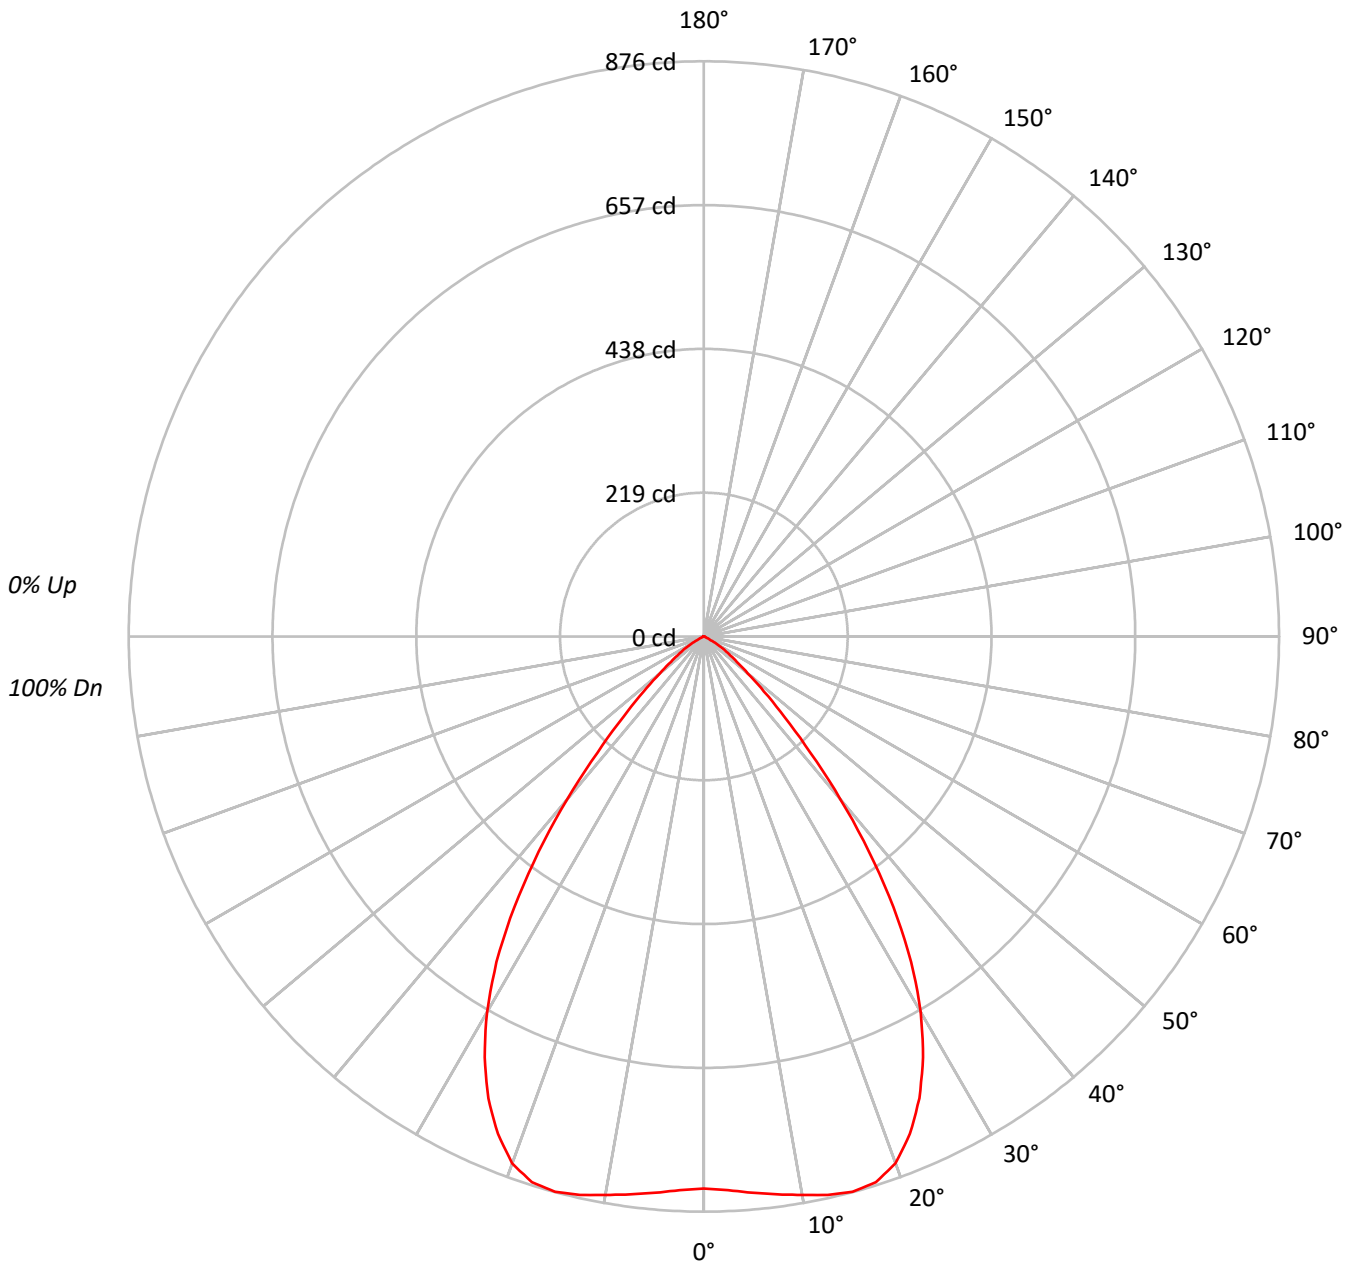



TEST NUMBER: P641436

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692H - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	92	92	92
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	94	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	70	70	70	70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65	65	65	65
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59	59	59	59
7	79	69	62	57	77	68	62	57	67	61	57	65	60	56	64	60	56	55	55	55	55
8	74	64	57	53	73	63	57	53	62	56	52	61	56	52	60	55	52	50	50	50	50
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	47	47	47
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	414735
5°	421173
10°	432605
15°	447191
20°	448230
25°	422605
30°	376405
35°	303381
40°	208547
45°	120989
50°	66931
55°	40342
60°	21511
65°	6421
70°	1587
75°	2097
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 120989 cd/sqm



TEST NUMBER: P641436

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692H - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.6	6.9
10°-20°	246.3	20.8
20°-30°	353.4	29.9
30°-40°	309.4	26.1
40°-50°	141.4	11.9
50°-60°	44.0	3.7
60°-70°	7.1	0.6
70°-80°	0.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	681.2	57.5
0°-40°	990.6	83.7
0°-60°	1176.0	99.3
0°-90°	1183.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1183.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	841	
5°	850	82
15°	876	246
25°	776	353
35°	504	309
45°	173	141
55°	47	44
65°	6	7
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P641436

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692H - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	840.6
2.5°	843.9
5°	850.4
7.5°	857.0
10°	863.5
12.5°	871.2
15°	875.5
17.5°	871.2
20°	853.7
22.5°	819.9
25°	776.3
27.5°	722.9
30°	660.7
32.5°	587.7
35°	503.7
37.5°	413.2
40°	323.8
42.5°	239.9
45°	173.4
47.5°	124.3
50°	87.2
52.5°	63.2
55°	46.9
57.5°	33.8
60°	21.8
62.5°	9.8
65°	5.5
67.5°	2.2
70°	1.1
72.5°	1.1
75°	1.1
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)