

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641466

Luminaire Tested: ML5612LSVWFL7597FS1E - 692W - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641466
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-85)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 692W - 900LM - 2700K
Description: ML56 RR, 75D TIR OPTIC, 6" WHITE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1193.7 lumens
Efficiency: N/A
Efficacy: 89.7 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641466
CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692W - 900LM - 2700K

Luminous Intensity Polar Plot

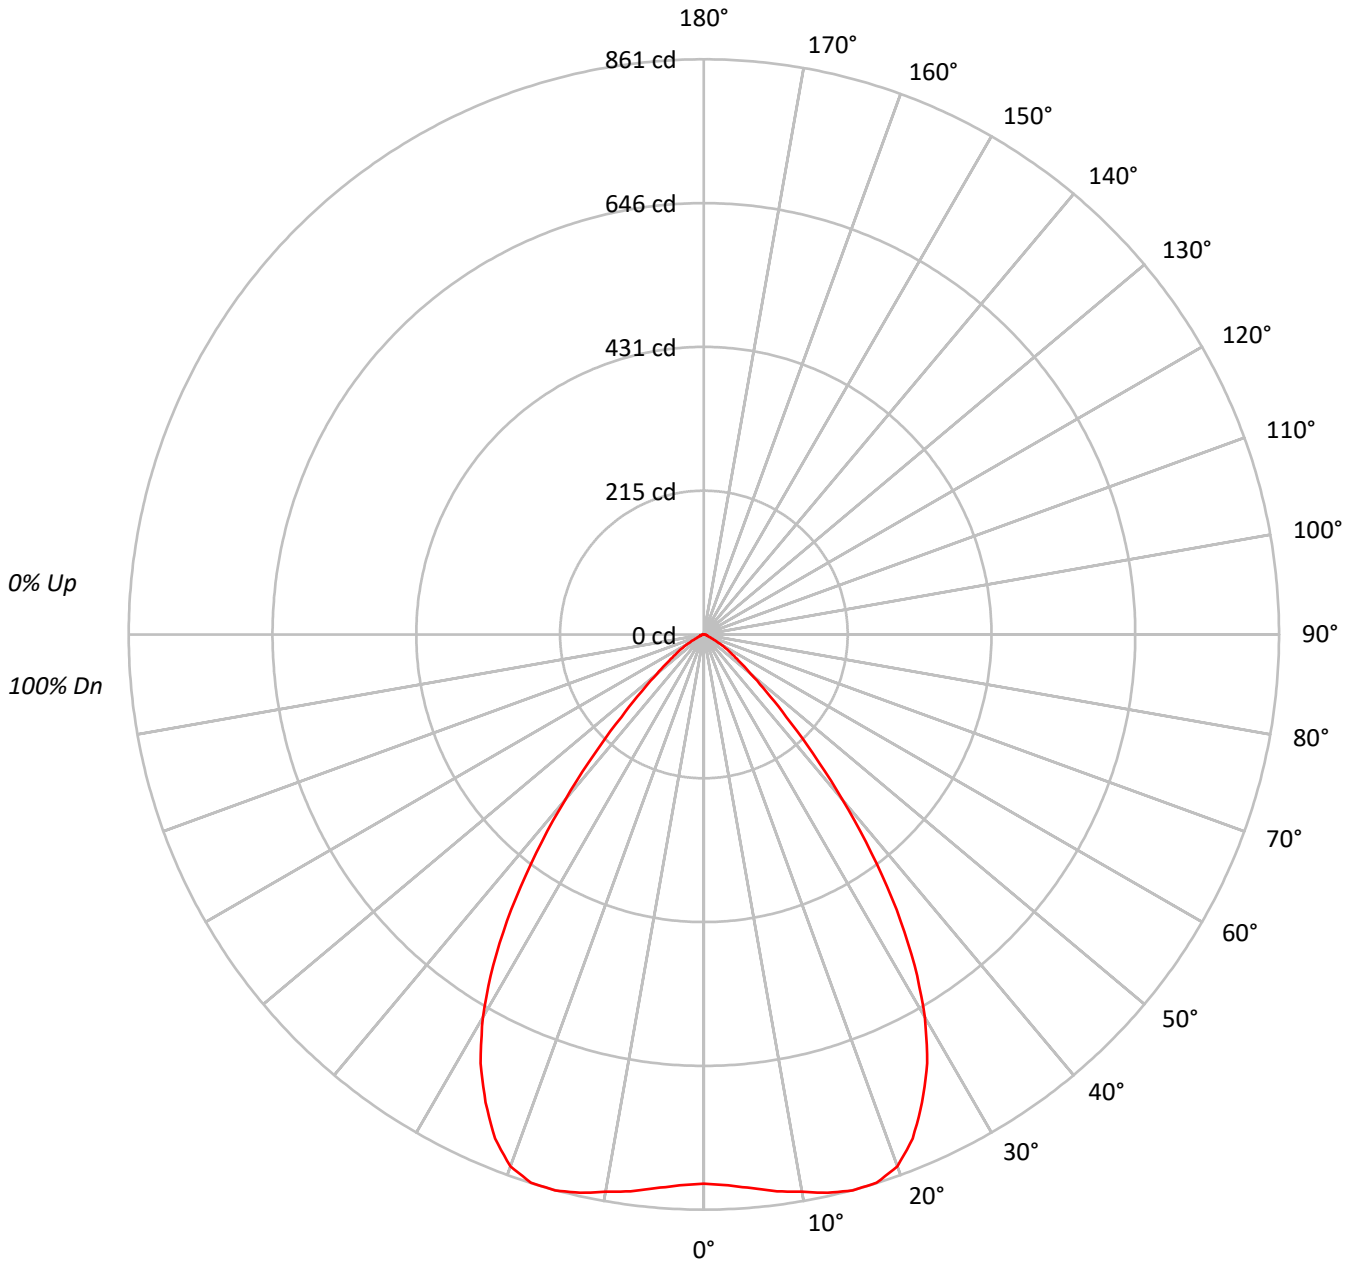



TEST NUMBER: P641466

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692W - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84	84	84	84
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76	76	76	76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70	70	70	70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64	64	64	64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	60	68	64	60	58	58	58	58
7	78	68	61	56	77	67	61	56	66	60	56	65	60	56	63	59	55	54	54	54	54
8	74	63	57	52	73	63	56	52	62	56	52	60	55	51	59	55	51	50	50	50	50
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	47	46	46	46	46
10	66	55	49	45	65	55	49	45	54	48	44	53	48	44	52	48	44	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	45068
5°	45779
10°	47160
15°	48888
20°	49424
25°	46757
30°	41880
35°	33682
40°	23129
45°	13544
50°	7821
55°	5008
60°	2993
65°	1414
70°	882
75°	932
80°	695
85°	692

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13544 cd/sqm



TEST NUMBER: P641466

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692W - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.9	6.7
10°-20°	242.8	20.3
20°-30°	352.5	29.5
30°-40°	309.1	25.9
40°-50°	142.8	12.0
50°-60°	48.6	4.1
60°-70°	12.3	1.0
70°-80°	4.5	0.4
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	675.2	56.6
0°-40°	984.3	82.5
0°-60°	1175.6	98.5
0°-90°	1193.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1193.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	822	
5°	832	80
15°	861	243
25°	773	353
35°	503	309
45°	175	143
55°	52	49
65°	11	12
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P641466

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 692W - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	822.1
2.5°	825.4
5°	831.9
7.5°	840.7
10°	847.2
12.5°	856.0
15°	861.4
17.5°	860.3
20°	847.2
22.5°	816.7
25°	773.0
27.5°	723.9
30°	661.6
32.5°	587.4
35°	503.3
37.5°	411.6
40°	323.2
42.5°	241.3
45°	174.7
47.5°	126.6
50°	91.7
52.5°	67.7
55°	52.4
57.5°	39.3
60°	27.3
62.5°	16.4
65°	10.9
67.5°	6.6
70°	5.5
72.5°	5.5
75°	4.4
77.5°	3.3
80°	2.2
82.5°	2.2
85°	1.1
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)