

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641475

Luminaire Tested: ML5612LSVWFL7597FS1E - 693BB - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641475
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-87)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 693BB - 1200LM - 5000K
Description: ML56 RR, 75D TIR OPTIC, 6" BLACK BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1578.7 lumens
Efficiency: N/A
Efficacy: 95.7 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641475
CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693BB - 1200LM - 5000K

Luminous Intensity Polar Plot

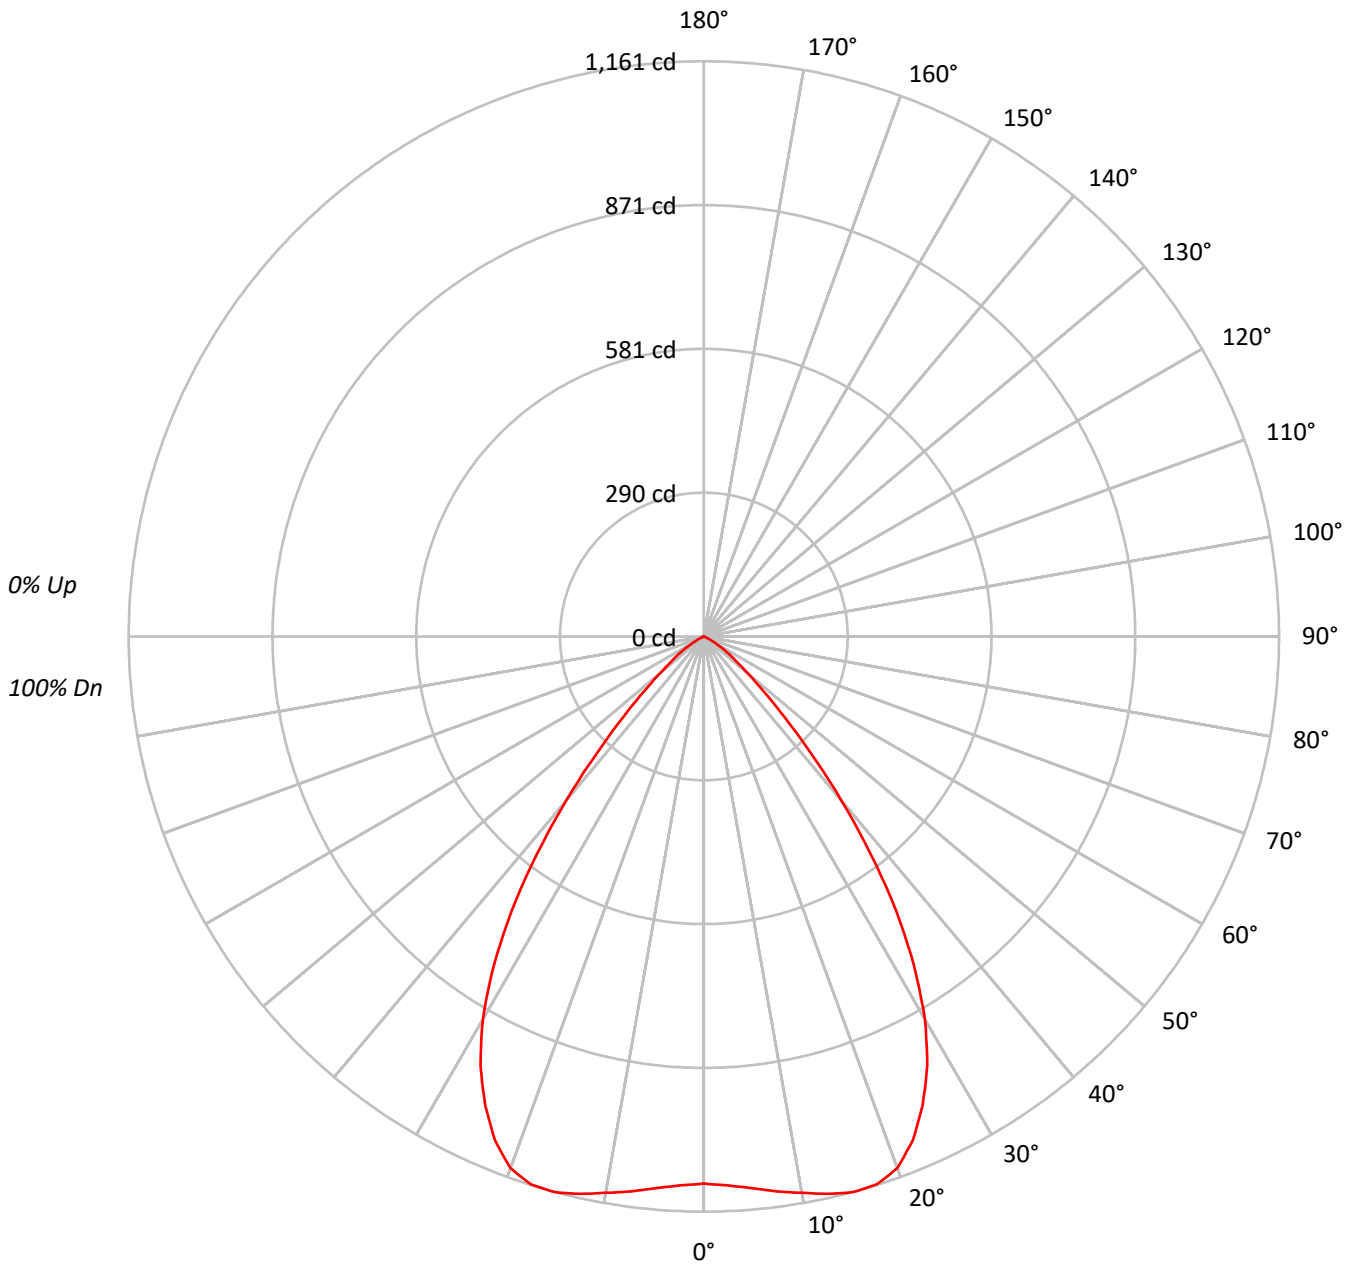



TEST NUMBER: P641475

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693BB - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	95	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	71	71	71	71
5	89	80	73	68	87	79	73	68	77	72	67	75	70	67	73	69	66	65	65	65	65
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59	59	59	59
7	79	69	62	57	78	68	62	57	67	61	57	65	60	56	64	60	56	55	55	55	55
8	75	64	57	53	73	63	57	53	62	56	52	61	56	52	60	55	52	50	50	50	50
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	47	47	47
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	60532
5°	61507
10°	63476
15°	65908
20°	66611
25°	63155
30°	56490
35°	45340
40°	30858
45°	17824
50°	9740
55°	5887
60°	2960
65°	778
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17824 cd/sqm



TEST NUMBER: P641475

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693BB - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.4	6.8
10°-20°	327.1	20.7
20°-30°	475.6	30.1
30°-40°	415.6	26.3
40°-50°	187.3	11.9
50°-60°	57.2	3.6
60°-70°	8.4	0.5
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	910.1	57.7
0°-40°	1325.7	84.0
0°-60°	1570.3	99.5
0°-90°	1578.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1578.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1104	
5°	1118	107
15°	1161	327
25°	1044	476
35°	678	416
45°	230	187
55°	62	57
65°	6	8
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641475

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693BB - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1104.2
2.5°	1108.7
5°	1117.7
7.5°	1129.7
10°	1140.3
12.5°	1152.3
15°	1161.3
17.5°	1159.8
20°	1141.8
22.5°	1101.2
25°	1044.1
27.5°	976.5
30°	892.4
32.5°	790.2
35°	677.5
37.5°	552.9
40°	431.2
42.5°	320.0
45°	229.9
47.5°	162.3
50°	114.2
52.5°	82.6
55°	61.6
57.5°	43.6
60°	27.0
62.5°	13.5
65°	6.0
67.5°	1.5
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)