

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641476

Luminaire Tested: ML5612LSVWFL7597FS1E - 693BB - 600LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P641476  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-87)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSVWFL7597FS1E - 693BB - 600LM - 2700K  
Description: ML56 RR, 75D TIR OPTIC, 6" BLACK BAFFLE TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 893.8 lumens  
Efficiency: N/A  
Efficacy: 86.8 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.09  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P641476

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693BB - 600LM - 2700K

### Luminous Intensity Polar Plot

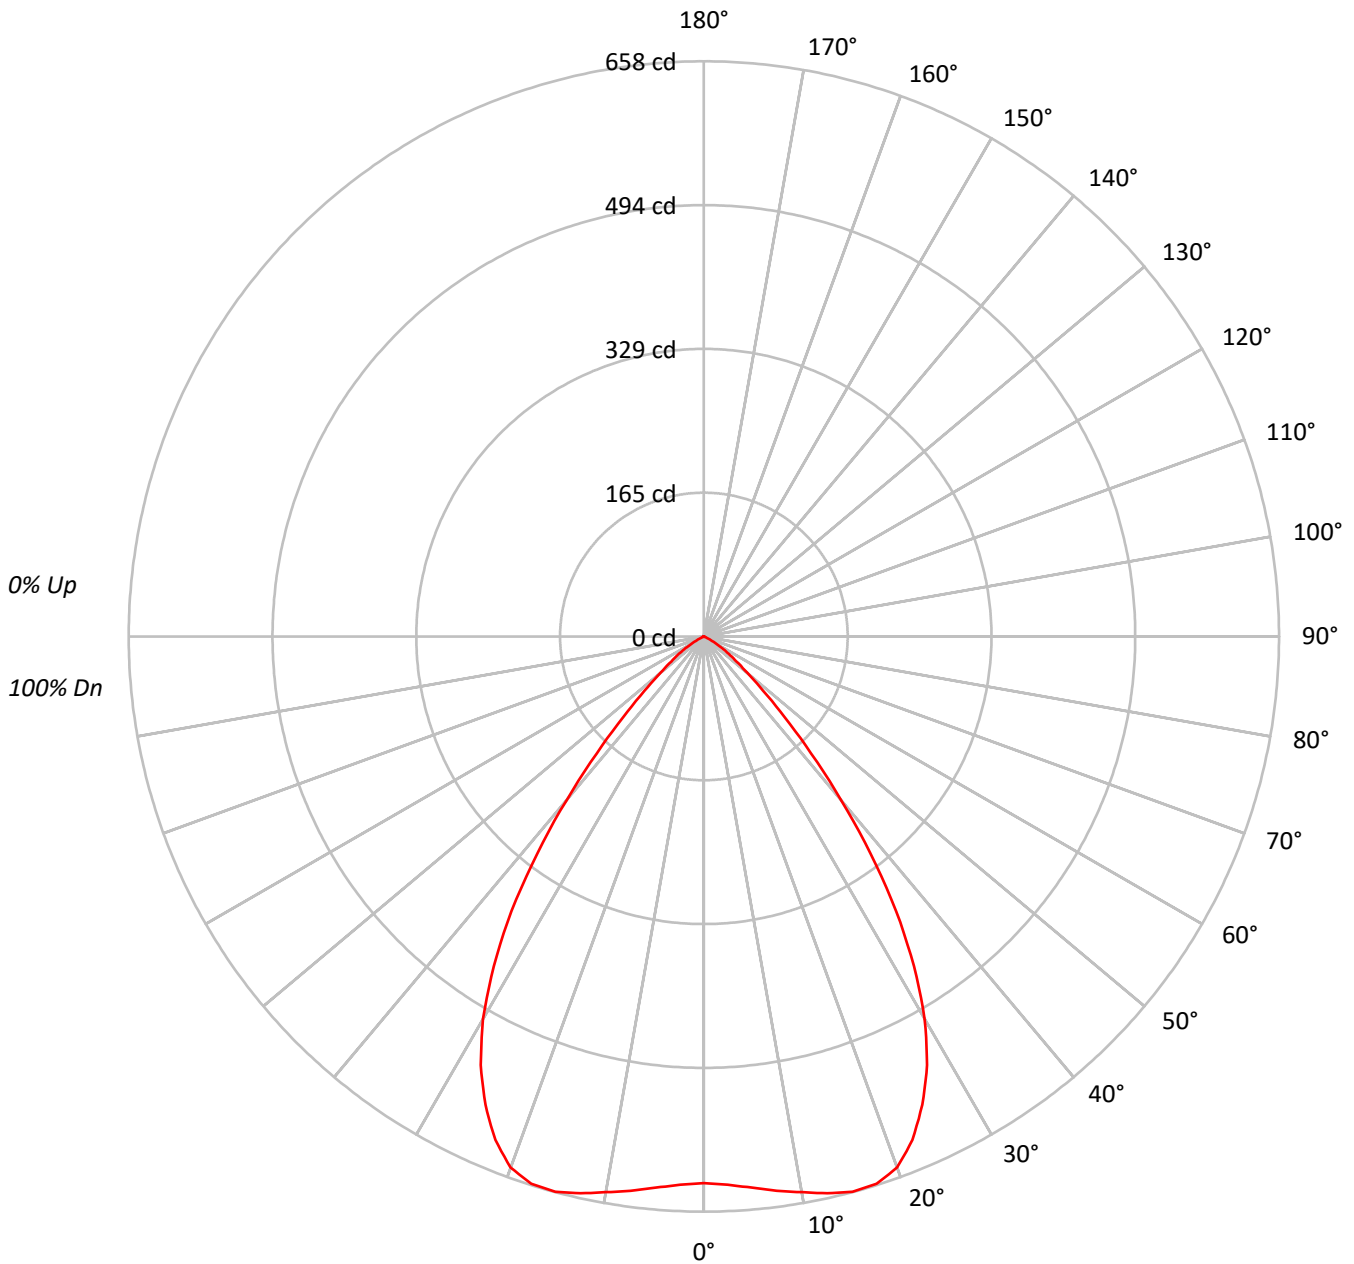



TEST NUMBER: P641476

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693BB - 600LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	95	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	71	71	71	71
5	89	80	73	68	87	79	73	68	77	72	67	75	70	67	73	69	66	65	65	65	65
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59	59	59	59
7	79	69	62	57	78	68	62	57	67	61	57	65	60	56	64	60	56	55	55	55	55
8	75	64	57	53	73	63	57	53	62	56	52	61	56	52	60	55	52	50	50	50	50
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	47	47	47
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	34274
5°	34823
10°	35938
15°	37316
20°	37710
25°	35754
30°	31980
35°	25672
40°	17468
45°	10086
50°	5509
55°	3336
60°	1677
65°	441
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 10086 cd/sqm



TEST NUMBER: P641476

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693BB - 600LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	60.8	6.8
10°-20°	185.2	20.7
20°-30°	269.2	30.1
30°-40°	235.3	26.3
40°-50°	106.1	11.9
50°-60°	32.4	3.6
60°-70°	4.8	0.5
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	515.3	57.6
0°-40°	750.5	84.0
0°-60°	889.0	99.5
0°-90°	893.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	893.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	625	
5°	633	61
15°	658	185
25°	591	269
35°	384	235
45°	130	106
55°	35	32
65°	3	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641476

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693BB - 600LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	625.2
2.5°	627.7
5°	632.8
7.5°	639.6
10°	645.6
12.5°	652.4
15°	657.5
17.5°	656.6
20°	646.4
22.5°	623.5
25°	591.1
27.5°	552.9
30°	505.2
32.5°	447.4
35°	383.6
37.5°	313.0
40°	244.1
42.5°	181.2
45°	130.1
47.5°	91.9
50°	64.6
52.5°	46.8
55°	34.9
57.5°	24.7
60°	15.3
62.5°	7.7
65°	3.4
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)