

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641502

Luminaire Tested: ML5612LSVWFL7597FS1E - 693TBZB - 1200LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641502
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-89)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 693TBZB - 1200LM - 3000K
Description: ML56 RR, 75D TIR OPTIC, 6" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1437.3 lumens
Efficiency: N/A
Efficacy: 87.1 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641502

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693TBZB - 1200LM - 3000K

Luminous Intensity Polar Plot

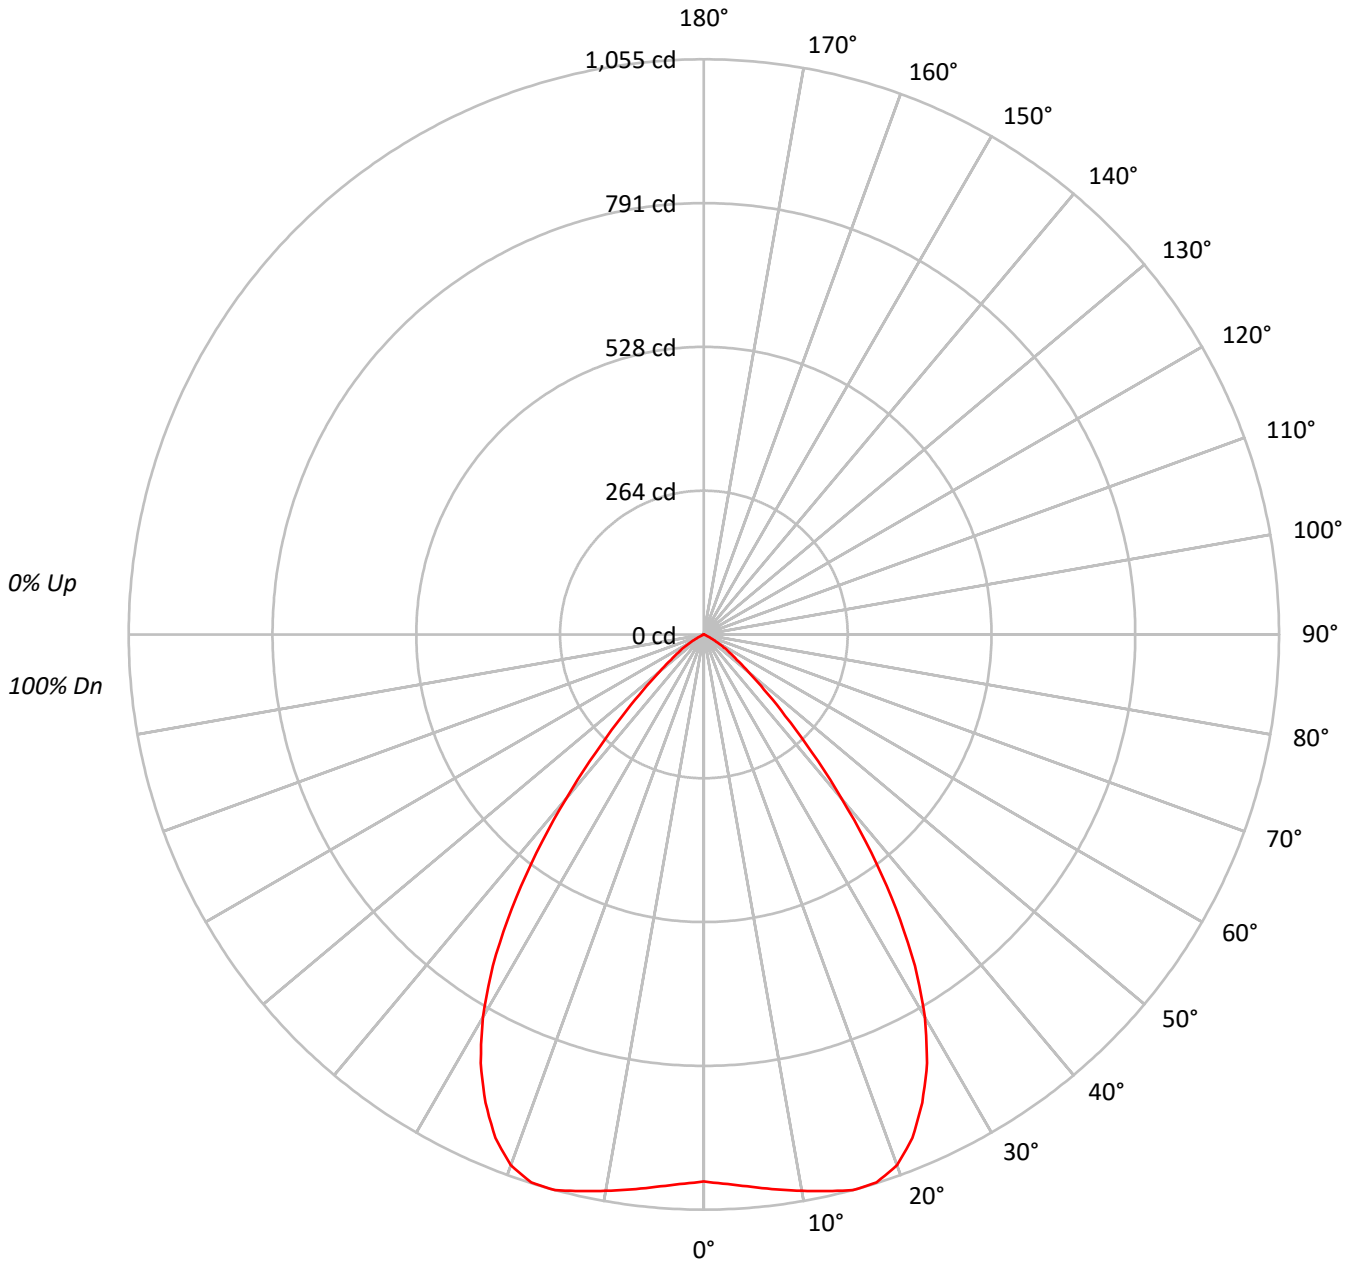



TEST NUMBER: P641502

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693TBZB - 1200LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92			92
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84			84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77			77
4	94	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	70			70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65			65
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59			59
7	79	69	62	57	77	68	62	57	67	61	57	65	60	56	64	60	56	55			55
8	74	64	57	53	73	63	57	53	62	56	52	61	56	52	60	55	52	50			50
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	52	48	47			47
10	67	56	49	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43			43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	55012
5°	55971
10°	57675
15°	59887
20°	60444
25°	57324
30°	51299
35°	41131
40°	28124
45°	16343
50°	9049
55°	5457
60°	2829
65°	700
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16343 cd/sqm



TEST NUMBER: P641502

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693TBZB - 1200LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.7	6.8
10°-20°	297.1	20.7
20°-30°	431.7	30.0
30°-40°	378.3	26.3
40°-50°	171.7	11.9
50°-60°	53.2	3.7
60°-70°	7.8	0.5
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	826.4	57.5
0°-40°	1204.7	83.8
0°-60°	1429.5	99.5
0°-90°	1437.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1437.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1004	
5°	1017	98
15°	1055	297
25°	948	432
35°	615	378
45°	211	172
55°	57	53
65°	5	8
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P641502

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693TBZB - 1200LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1003.5
2.5°	1008.9
5°	1017.1
7.5°	1026.6
10°	1036.1
12.5°	1045.6
15°	1055.2
17.5°	1053.8
20°	1036.1
22.5°	999.4
25°	947.7
27.5°	886.5
30°	810.4
32.5°	720.7
35°	614.6
37.5°	504.5
40°	393.0
42.5°	292.3
45°	210.8
47.5°	149.6
50°	106.1
52.5°	76.1
55°	57.1
57.5°	40.8
60°	25.8
62.5°	12.2
65°	5.4
67.5°	1.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)