

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641526

Luminaire Tested: ML5612LSVWFL7597FS1E - 693WB - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641526
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-86)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 693WB - 900LM - 2700K
Description: ML56 RR, 75D TIR OPTIC, 6" WHITE BAFFLE TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1186.0 lumens
Efficiency: N/A
Efficacy: 89.2 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641526

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693WB - 900LM - 2700K

Luminous Intensity Polar Plot

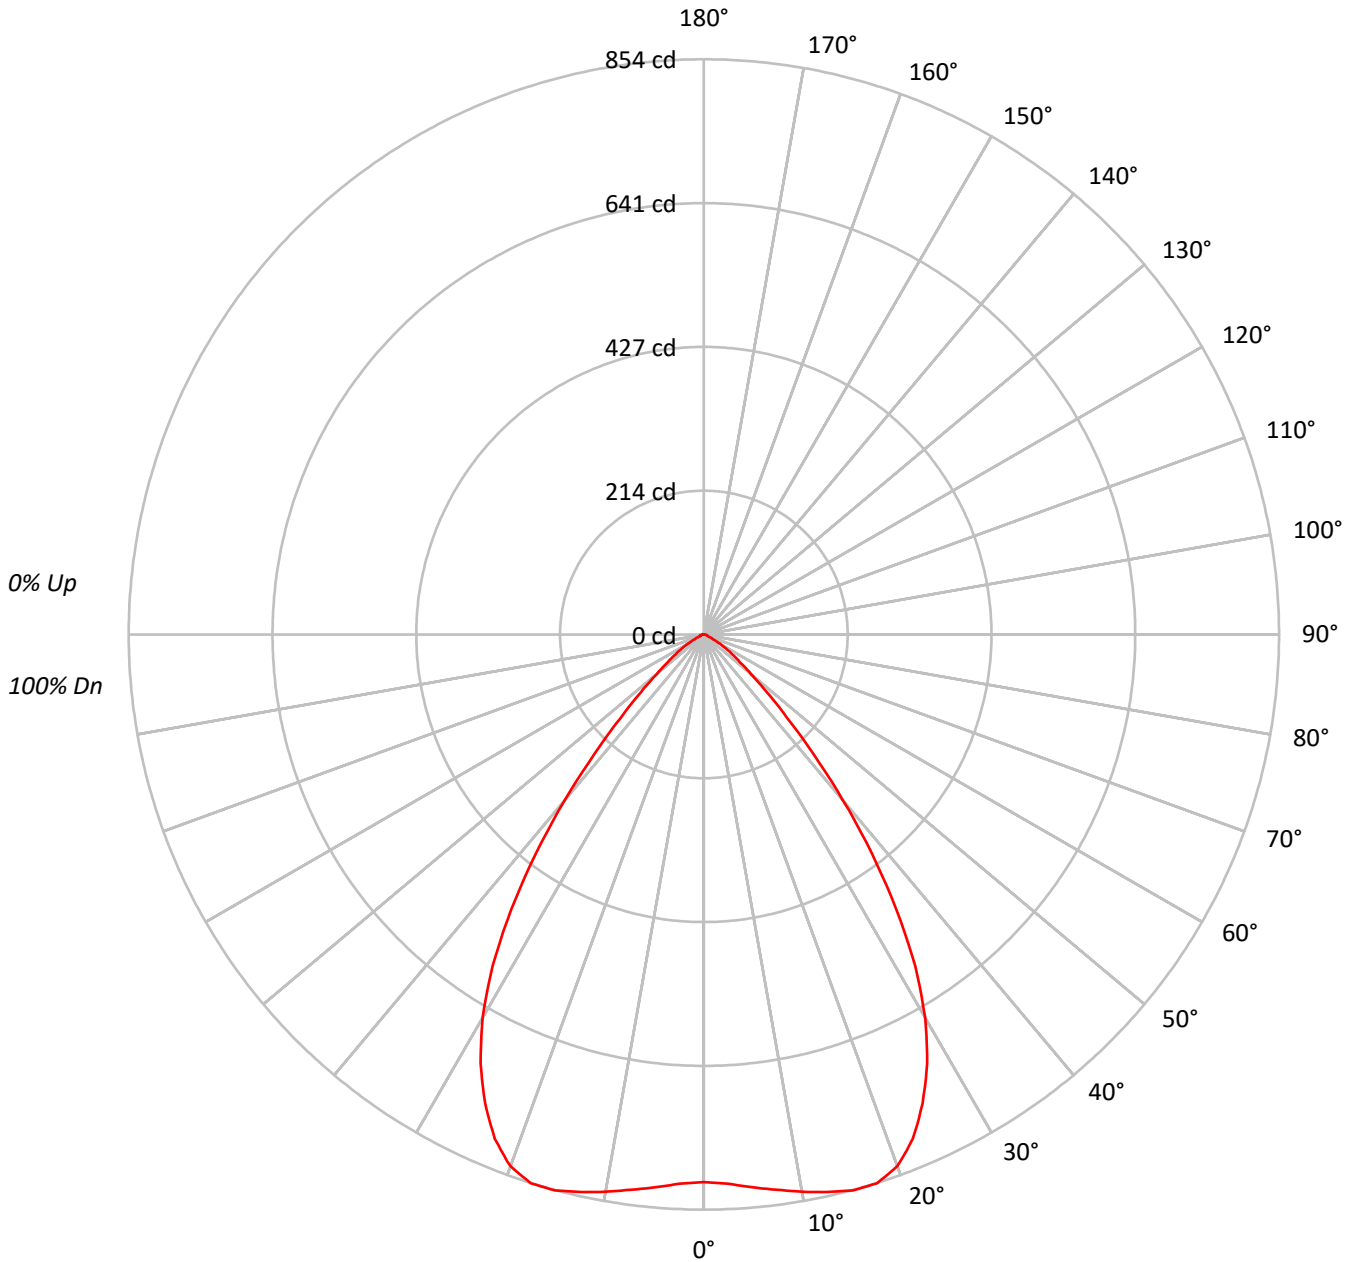



TEST NUMBER: P641526

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693WB - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84	84	84	84
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76	76	76	76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70	70	70	70
5	88	79	72	67	87	78	72	67	76	71	67	74	70	66	73	69	65	64	64	64	64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	60	68	63	60	58	58	58	58
7	78	68	61	56	77	67	61	56	66	60	56	65	59	56	63	59	55	54	54	54	54
8	74	63	57	52	73	63	56	52	61	56	52	60	55	51	59	55	51	50	50	50	50
9	70	59	52	48	69	59	52	48	58	52	48	57	51	48	56	51	47	46	46	46	46
10	66	55	49	45	65	55	49	44	54	48	44	53	48	44	52	48	44	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	44569
5°	45339
10°	46770
15°	48491
20°	49016
25°	46466
30°	41582
35°	33375
40°	22957
45°	13536
50°	7821
55°	4903
60°	2993
65°	1414
70°	882
75°	932
80°	1042
85°	692

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13536 cd/sqm



TEST NUMBER: P641526

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693WB - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.1	6.7
10°-20°	240.8	20.3
20°-30°	349.9	29.5
30°-40°	306.9	25.9
40°-50°	142.3	12.0
50°-60°	48.3	4.1
60°-70°	12.1	1.0
70°-80°	4.9	0.4
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	669.9	56.5
0°-40°	976.7	82.4
0°-60°	1167.4	98.4
0°-90°	1186.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1186.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	813	
5°	824	79
15°	854	241
25°	768	350
35°	499	307
45°	175	142
55°	51	48
65°	11	12
75°	4	5
85°	1	2
90°	0	



TEST NUMBER: P641526

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 693WB - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	813.0
2.5°	816.2
5°	823.9
7.5°	831.5
10°	840.2
12.5°	847.9
15°	854.4
17.5°	854.4
20°	840.2
22.5°	810.8
25°	768.2
27.5°	718.0
30°	656.9
32.5°	583.8
35°	498.7
37.5°	409.2
40°	320.8
42.5°	240.1
45°	174.6
47.5°	126.6
50°	91.7
52.5°	67.7
55°	51.3
57.5°	39.3
60°	27.3
62.5°	15.3
65°	10.9
67.5°	6.5
70°	5.5
72.5°	5.5
75°	4.4
77.5°	4.4
80°	3.3
82.5°	2.2
85°	1.1
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)