

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641535

Luminaire Tested: ML5612LSVWFL7597FS1E - 694TBZB - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641535
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-91)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 694TBZB - 1200LM - 5000K
Description: ML56 RR, 75D TIR OPTIC, 6" TUSCON BRONZE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1649.2 lumens
Efficiency: N/A
Efficacy: 100.0 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.08
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 16.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641535

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694TBZB - 1200LM - 5000K

Luminous Intensity Polar Plot

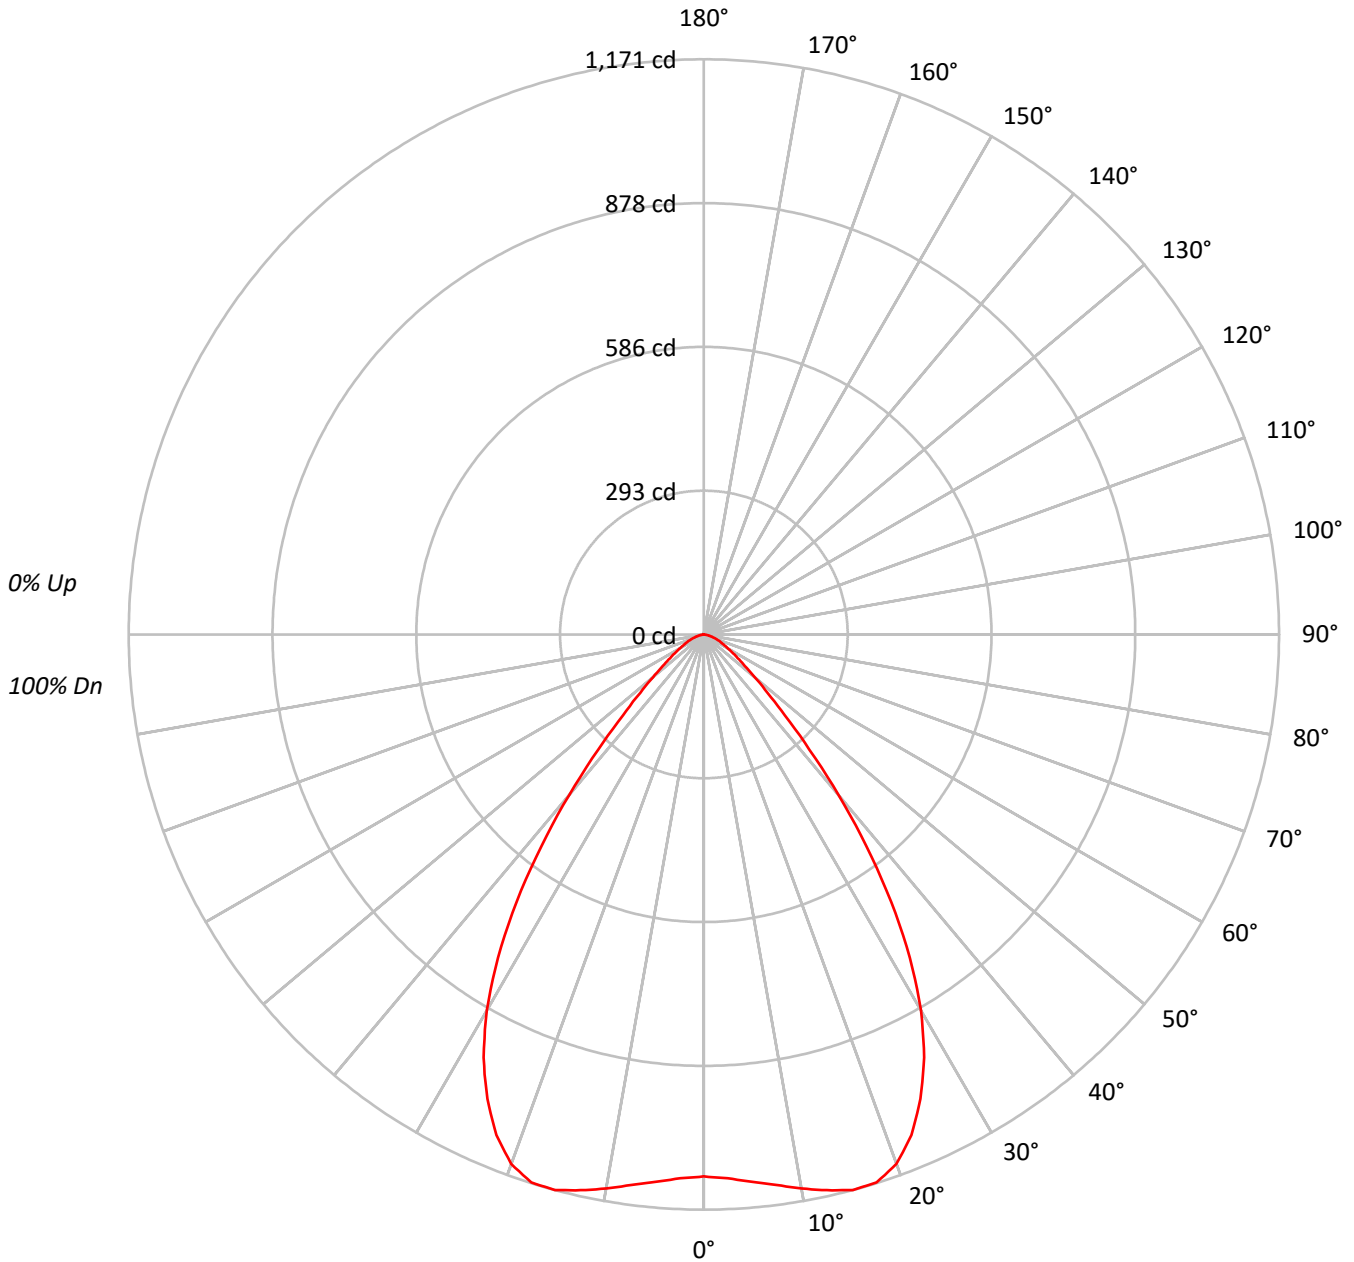



TEST NUMBER: P641535

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694TBZB - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	73	81	76	72	79	74	71	77	73	70	68			
5	88	78	71	66	86	77	71	66	75	69	65	73	68	65	72	67	64	62			
6	82	72	65	60	81	71	65	60	70	64	60	68	63	59	67	62	59	57			
7	78	67	60	55	76	66	60	55	65	59	55	64	58	54	62	58	54	52			
8	73	62	55	51	72	62	55	51	61	55	50	59	54	50	58	54	50	48			
9	69	58	51	47	68	58	51	47	57	51	47	56	50	46	55	50	46	45			
10	65	54	48	44	64	54	48	43	53	47	43	52	47	43	51	47	43	42			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	60489
5°	61545
10°	63760
15°	66453
20°	66908
25°	63106
30°	55971
35°	44504
40°	30507
45°	18041
50°	11522
55°	8038
60°	6085
65°	5059
70°	4087
75°	3177
80°	1894
85°	943

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18041 cd/sqm



TEST NUMBER: P641535

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694TBZB - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.6	6.5
10°-20°	329.3	20.0
20°-30°	474.8	28.8
30°-40°	409.6	24.8
40°-50°	192.0	11.6
50°-60°	78.7	4.8
60°-70°	39.3	2.4
70°-80°	16.0	1.0
80°-90°	2.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	911.7	55.3
0°-40°	1321.3	80.1
0°-60°	1591.9	96.5
0°-90°	1649.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1649.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1103	
5°	1118	108
15°	1171	329
25°	1043	475
35°	665	410
45°	233	192
55°	84	79
65°	39	39
75°	15	16
85°	2	2
90°	0	



TEST NUMBER: P641535

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694TBZB - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1103.4
2.5°	1107.9
5°	1118.4
7.5°	1130.4
10°	1145.4
12.5°	1158.9
15°	1170.9
17.5°	1169.4
20°	1146.9
22.5°	1103.4
25°	1043.3
27.5°	971.3
30°	884.2
32.5°	780.6
35°	665.0
37.5°	543.4
40°	426.3
42.5°	318.3
45°	232.7
47.5°	175.6
50°	135.1
52.5°	105.1
55°	84.1
57.5°	69.1
60°	55.5
62.5°	46.5
65°	39.0
67.5°	33.0
70°	25.5
72.5°	19.5
75°	15.0
77.5°	10.5
80°	6.0
82.5°	3.0
85°	1.5
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)