

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641542

Luminaire Tested: ML5612LSVWFL7597FS1E - 694TBZB - 900LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641542
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-91)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 694TBZB - 900LM - 3000K
Description: ML56 RR, 75D TIR OPTIC, 6" TUSCON BRONZE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1232.2 lumens
Efficiency: N/A
Efficacy: 92.6 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.08
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641542
CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694TBZB - 900LM - 3000K

Luminous Intensity Polar Plot

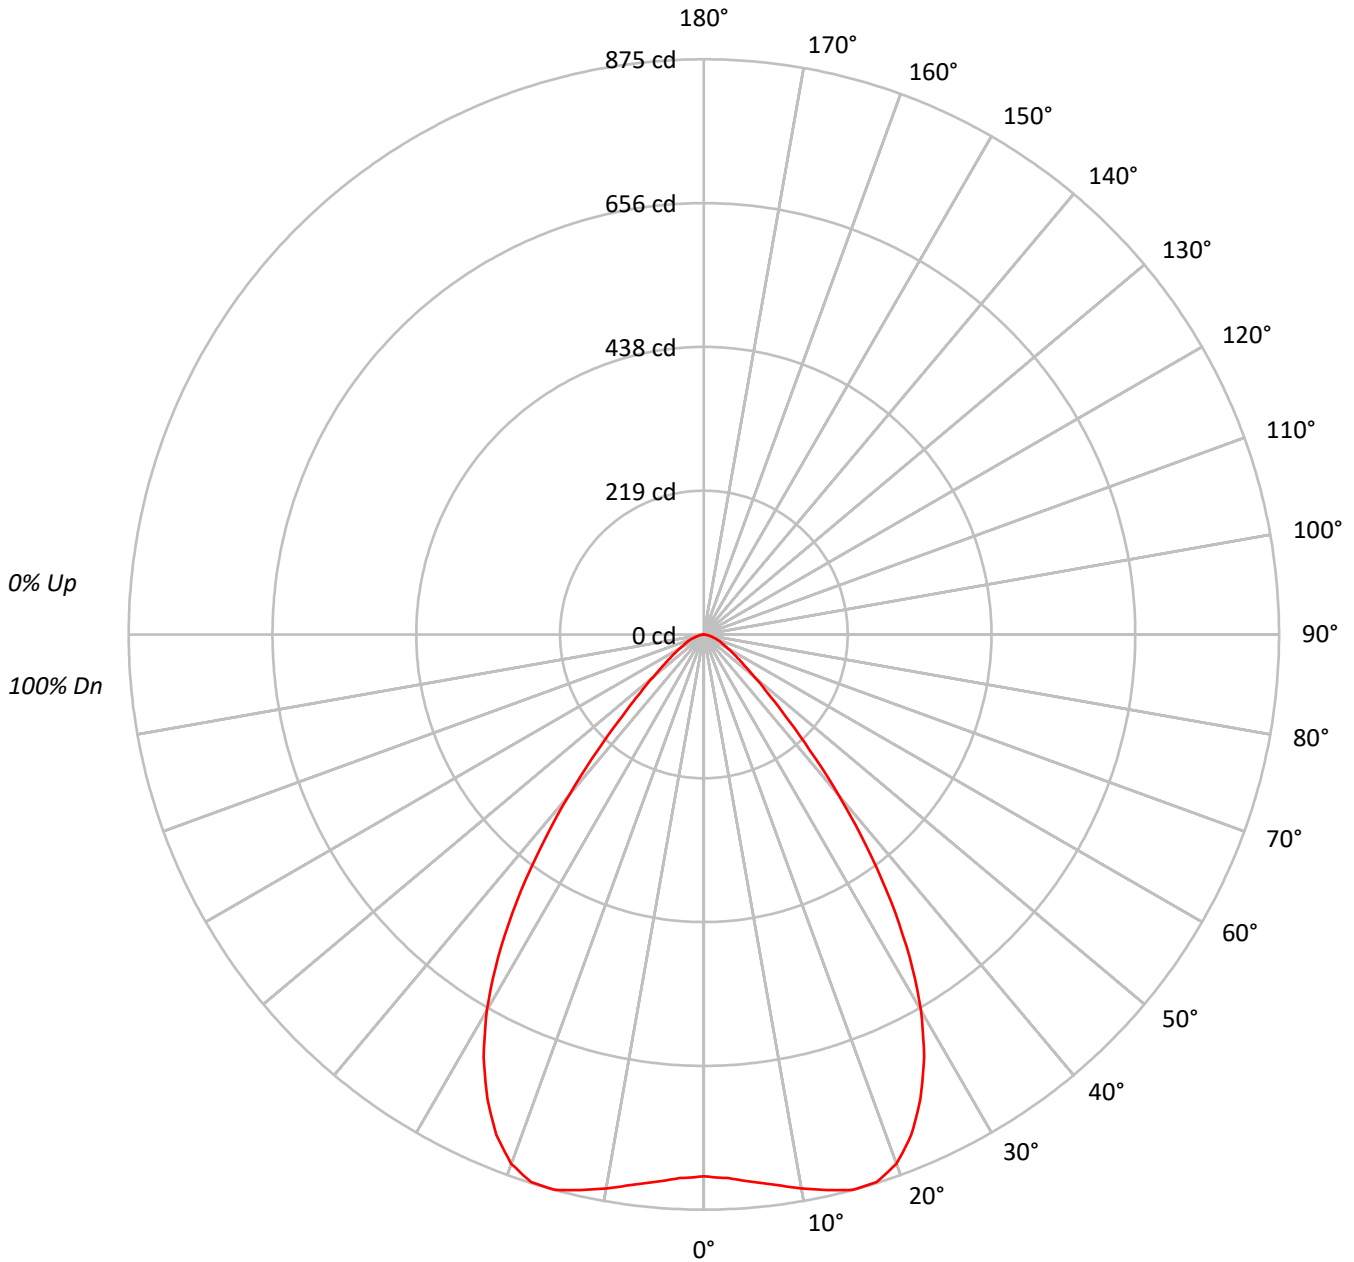



TEST NUMBER: P641542

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694TBZB - 900LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	73	81	76	72	79	74	71	77	73	70	68			
5	88	78	71	66	86	77	71	66	75	69	65	73	68	65	72	67	64	62			
6	82	72	65	60	81	71	65	60	70	64	60	68	63	59	67	62	59	57			
7	78	67	60	55	76	66	60	55	65	59	55	64	58	54	62	58	54	52			
8	73	62	55	51	72	62	55	51	61	55	50	59	54	50	58	54	50	48			
9	69	58	51	47	68	58	51	47	57	51	47	56	50	46	55	50	46	45			
10	65	54	48	44	64	54	48	43	53	47	43	52	47	43	51	47	43	42			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	45194
5°	45983
10°	47639
15°	49648
20°	49990
25°	47150
30°	41817
35°	33254
40°	22793
45°	13474
50°	8605
55°	6002
60°	4550
65°	3788
70°	3061
75°	2372
80°	1421
85°	692

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13474 cd/sqm



TEST NUMBER: P641542

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694TBZB - 900LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.4	6.5
10°-20°	246.1	20.0
20°-30°	354.7	28.8
30°-40°	306.0	24.8
40°-50°	143.4	11.6
50°-60°	58.7	4.8
60°-70°	29.4	2.4
70°-80°	12.0	1.0
80°-90°	1.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	681.1	55.3
0°-40°	987.2	80.1
0°-60°	1189.3	96.5
0°-90°	1232.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1232.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	824	
5°	836	80
15°	875	246
25°	780	355
35°	497	306
45°	174	143
55°	63	59
65°	29	29
75°	11	12
85°	1	2
90°	0	



TEST NUMBER: P641542

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694TBZB - 900LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	824.4
2.5°	827.7
5°	835.6
7.5°	844.5
10°	855.8
12.5°	865.8
15°	874.8
17.5°	873.7
20°	856.9
22.5°	824.4
25°	779.5
27.5°	725.7
30°	660.6
32.5°	583.2
35°	496.9
37.5°	406.0
40°	318.5
42.5°	237.8
45°	173.8
47.5°	131.2
50°	100.9
52.5°	78.5
55°	62.8
57.5°	51.6
60°	41.5
62.5°	34.8
65°	29.2
67.5°	24.7
70°	19.1
72.5°	14.6
75°	11.2
77.5°	7.9
80°	4.5
82.5°	2.2
85°	1.1
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)