

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641552

Luminaire Tested: ML5612LSVWFL7597FS1E - 694WB - 600LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P641552
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-90)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5612LSVWFL7597FS1E - 694WB - 600LM - 3000K
Description: ML56 RR, 75D TIR OPTIC, 6" WHITE GIMBAL TRIM
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 965.7 lumens
Efficiency: N/A
Efficacy: 93.8 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.08
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P641552
CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694WB - 600LM - 3000K

Luminous Intensity Polar Plot

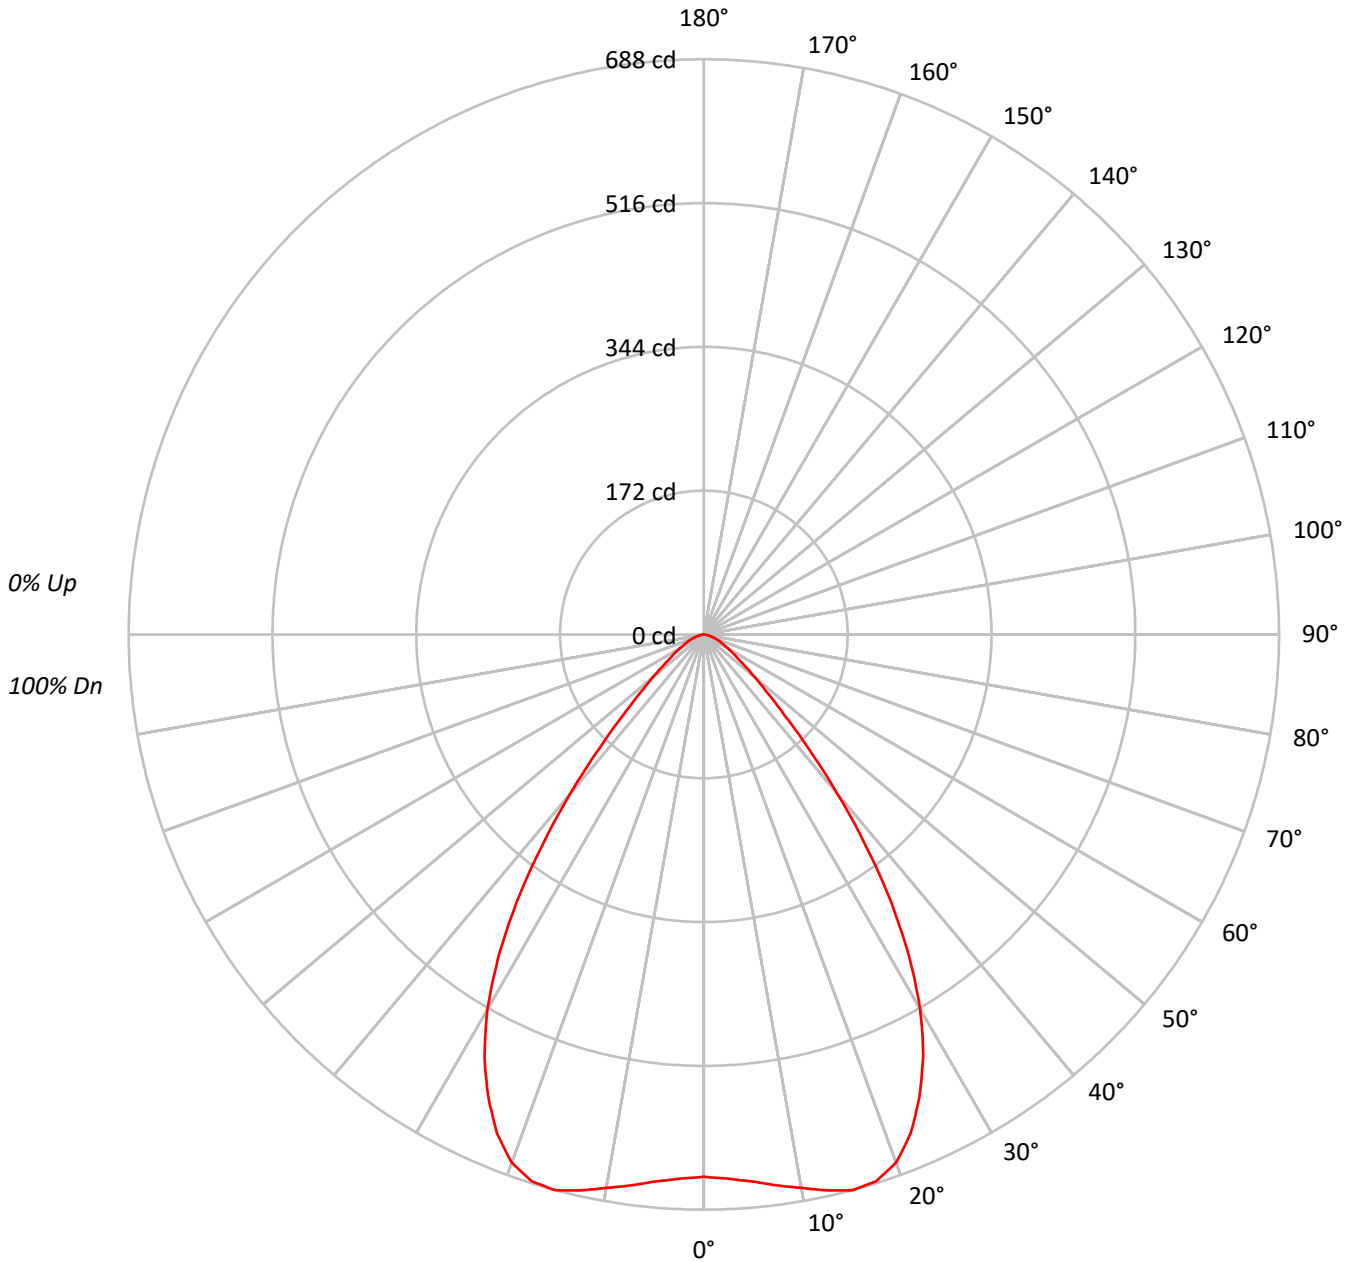



TEST NUMBER: P641552

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694WB - 600LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75																			
4	93	84	78	73	91	83	77	73	81	76	72	79	74	71	77	73	70	68																			
5	88	78	71	66	86	77	71	66	75	69	65	73	68	65	72	67	64	62																			
6	82	72	65	60	81	71	65	60	70	64	60	68	63	59	67	62	59	57																			
7	78	67	60	55	76	66	60	55	65	59	55	64	58	54	62	58	54	53																			
8	73	62	56	51	72	62	55	51	61	55	50	59	54	50	58	54	50	48																			
9	69	58	51	47	68	58	51	47	57	51	47	56	50	47	55	50	46	45																			
10	65	54	48	44	64	54	48	44	53	47	43	52	47	43	52	47	43	42																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	35562
5°	36132
10°	37424
15°	39052
20°	39221
25°	36915
30°	32765
35°	26093
40°	17769
45°	10575
50°	6789
55°	4683
60°	3640
65°	2945
70°	2388
75°	1843
80°	1105
85°	566

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10575 cd/sqm



TEST NUMBER: P641552

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694WB - 600LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	63.2	6.5
10°-20°	193.3	20.0
20°-30°	277.9	28.8
30°-40°	239.7	24.8
40°-50°	112.1	11.6
50°-60°	46.0	4.8
60°-70°	23.0	2.4
70°-80°	9.3	1.0
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	534.4	55.3
0°-40°	774.1	80.2
0°-60°	932.2	96.5
0°-90°	965.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	965.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	649	
5°	657	63
15°	688	193
25°	610	278
35°	390	240
45°	136	112
55°	49	46
65°	23	23
75°	9	9
85°	1	1
90°	0	



TEST NUMBER: P641552

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694WB - 600LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	648.7
2.5°	651.4
5°	656.6
7.5°	664.5
10°	672.3
12.5°	681.1
15°	688.1
17.5°	685.5
20°	672.3
22.5°	646.1
25°	610.3
27.5°	568.3
30°	517.6
32.5°	457.3
35°	389.9
37.5°	317.4
40°	248.3
42.5°	185.4
45°	136.4
47.5°	102.3
50°	79.6
52.5°	61.2
55°	49.0
57.5°	40.2
60°	33.2
62.5°	27.1
65°	22.7
67.5°	19.2
70°	14.9
72.5°	11.4
75°	8.7
77.5°	6.1
80°	3.5
82.5°	1.7
85°	0.9
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)