

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P641554

Luminaire Tested: ML5612LSVWFL7597FS1E - 694WB - 600LM - 4000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P641554  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-90)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5612LSVWFL7597FS1E - 694WB - 600LM - 4000K  
Description: ML56 RR, 75D TIR OPTIC, 6" WHITE GIMBAL TRIM  
Light Source: (1) HCL SELECTABLE LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1067.3 lumens  
Efficiency: N/A  
Efficacy: 103.6 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.08  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P641554

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694WB - 600LM - 4000K

### Luminous Intensity Polar Plot

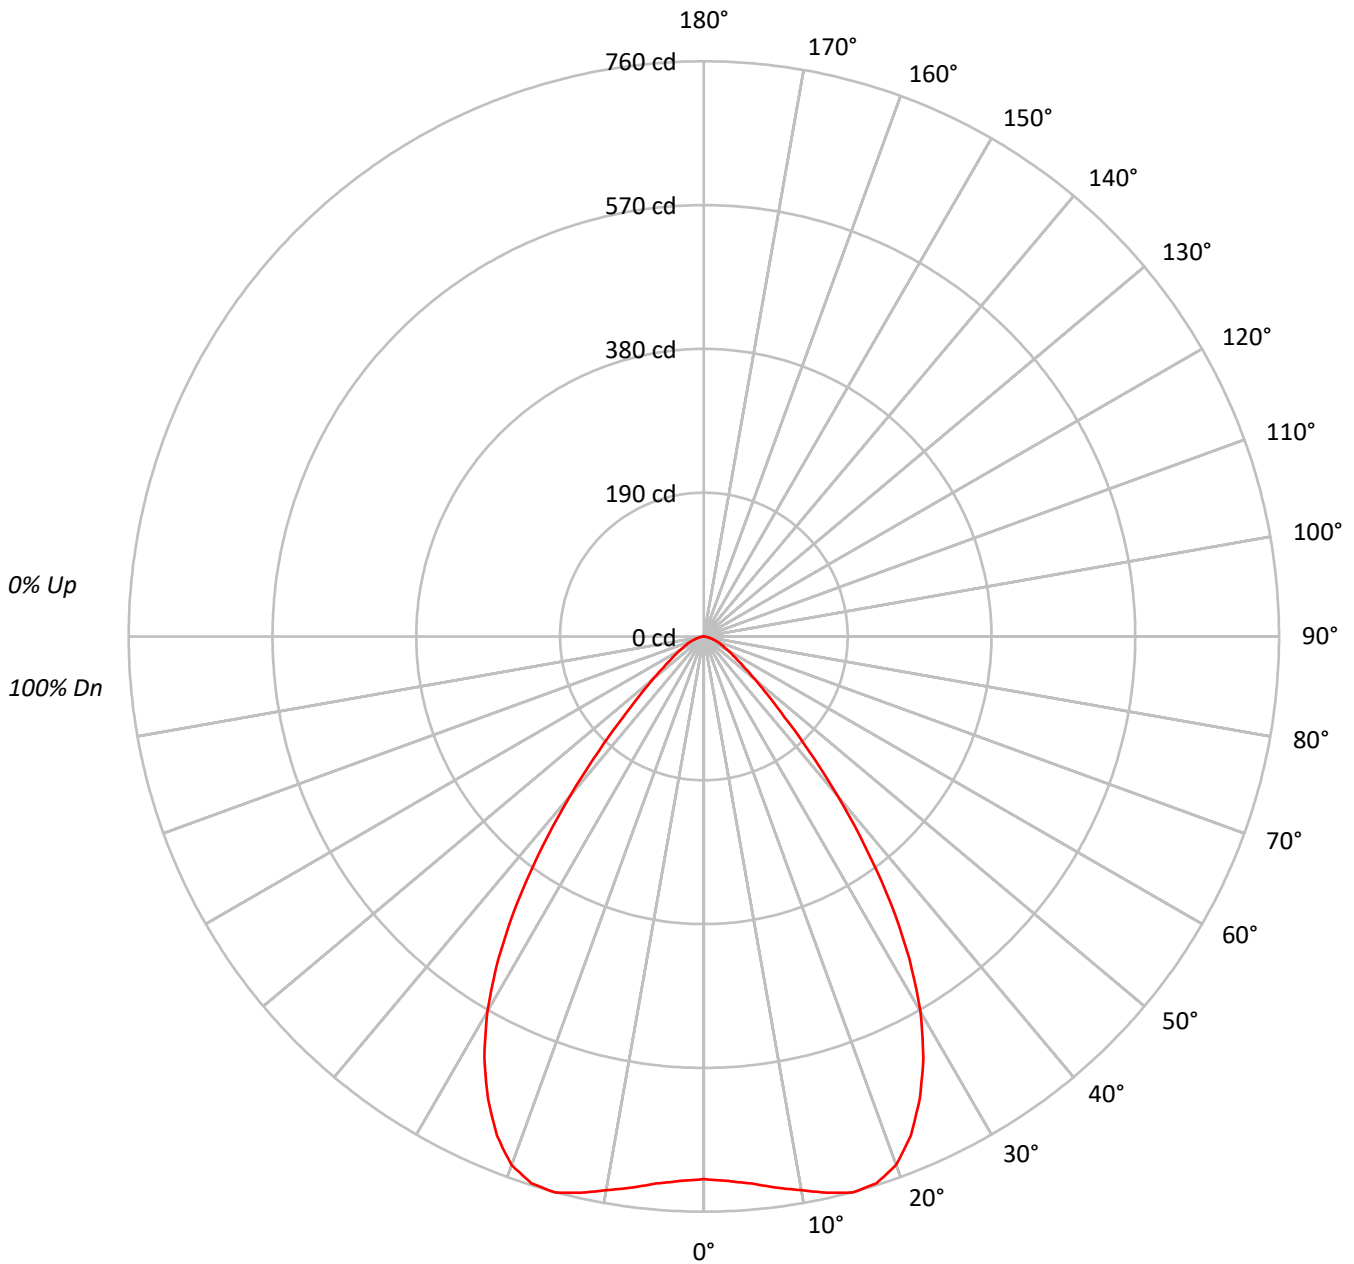



TEST NUMBER: P641554

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694WB - 600LM - 4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75																			
4	93	84	78	73	91	83	77	73	81	76	72	79	74	71	77	73	70	68																			
5	88	78	71	66	86	77	71	66	75	69	65	73	68	65	72	67	64	62																			
6	82	72	65	60	81	71	65	60	70	64	60	68	63	59	67	62	59	57																			
7	78	67	60	55	76	66	60	55	65	59	55	64	58	54	62	58	54	53																			
8	73	62	56	51	72	62	55	51	61	55	50	59	54	50	58	54	50	48																			
9	69	58	51	47	68	58	51	47	57	51	47	56	50	47	55	50	46	45																			
10	65	54	48	44	64	54	48	44	53	47	43	52	47	43	51	47	43	42																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	39306
5°	39935
10°	41365
15°	43161
20°	43351
25°	40799
30°	36214
35°	28844
40°	19637
45°	11683
50°	7497
55°	5171
60°	4024
65°	3256
70°	2629
75°	2055
80°	1231
85°	629

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11683 cd/sqm



TEST NUMBER: P641554

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694WB - 600LM - 4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	69.9	6.5
10°-20°	213.6	20.0
20°-30°	307.1	28.8
30°-40°	264.9	24.8
40°-50°	123.9	11.6
50°-60°	50.8	4.8
60°-70°	25.4	2.4
70°-80°	10.3	1.0
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	590.6	55.3
0°-40°	855.6	80.2
0°-60°	1030.2	96.5
0°-90°	1067.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1067.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	717	
5°	726	70
15°	760	214
25°	674	307
35°	431	265
45°	151	124
55°	54	51
65°	25	25
75°	10	10
85°	1	1
90°	0	



TEST NUMBER: P641554

CATALOG NUMBER: ML5612LSVWFL7597FS1E - 694WB - 600LM - 4000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	717.0
2.5°	719.9
5°	725.7
7.5°	734.4
10°	743.1
12.5°	752.8
15°	760.5
17.5°	757.6
20°	743.1
22.5°	714.1
25°	674.5
27.5°	628.1
30°	572.1
32.5°	505.4
35°	431.0
37.5°	350.8
40°	274.4
42.5°	204.9
45°	150.7
47.5°	113.1
50°	87.9
52.5°	67.6
55°	54.1
57.5°	44.5
60°	36.7
62.5°	30.0
65°	25.1
67.5°	21.3
70°	16.4
72.5°	12.6
75°	9.7
77.5°	6.8
80°	3.9
82.5°	1.9
85°	1.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)